
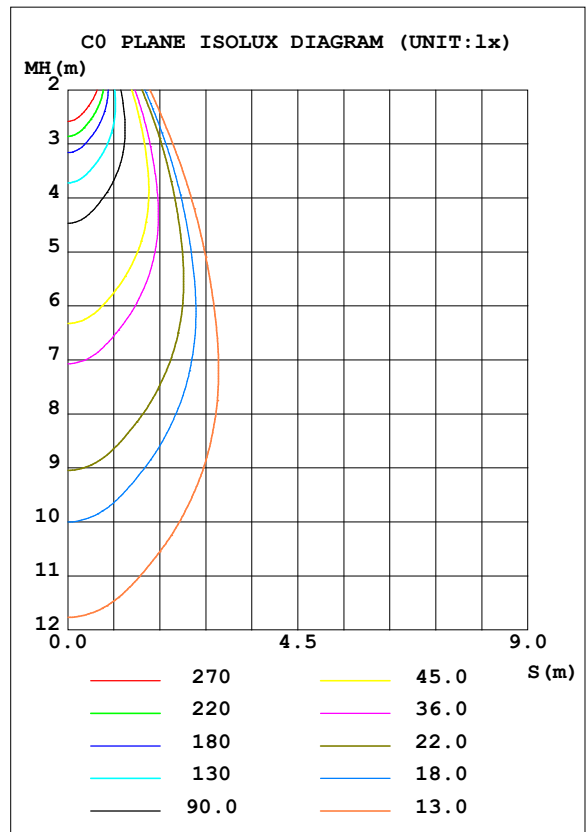


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.15 lm/W			
MODEL		I _{max} (cd)	1803	S/MH (C0/180)	0.68
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.71
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1014.3	<input type="checkbox"/> UP, DN (C0-180)	0.0, 47.4
NOMINAL FLUX (lm)	1014.31	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 52.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.70

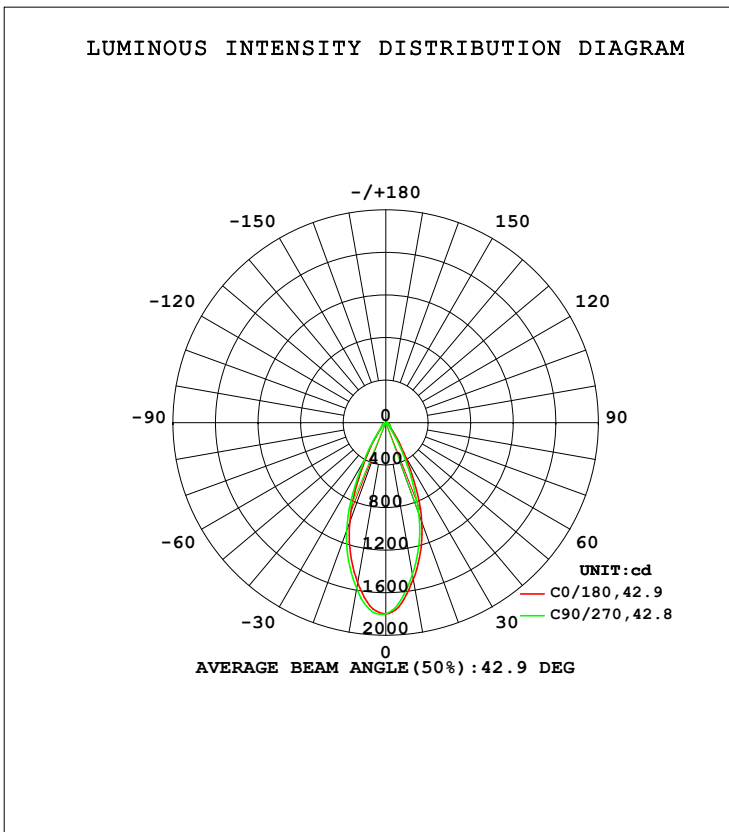

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1495	1458	1450	1465	1528	1573	1582	1536	0- 10	157.0	157.0	15.5,15.5
20	993.2	919.2	907.1	901.8	993.2	1029	1078	1010	10- 20	349.2	506.2	49.9,49.9
30	381.8	324.7	297.2	306.3	360.1	389.2	415.0	387.8	20- 30	291.7	797.9	78.7,78.7
40	89.42	79.21	69.84	75.50	82.86	91.13	85.84	103.8	30- 40	115.3	913.2	90,90
50	48.37	44.17	39.57	42.96	46.68	46.53	45.64	48.37	40- 50	46.05	959.3	94.6,94.6
60	28.57	24.23	20.29	23.62	27.08	26.47	25.20	27.52	50- 60	30.84	990.1	97.6,97.6
70	11.39	9.193	8.072	8.899	10.62	10.01	9.724	10.47	60- 70	16.39	1007	99.2,99.2
80	4.297	2.564	1.680	2.463	4.115	3.461	3.017	3.594	70- 80	6.749	1013	99.9,99.9
90	0.0457	0.0284	0.0297	0.0241	0.0533	0.0360	0.0354	0.0698	80- 90	1.046	1014	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

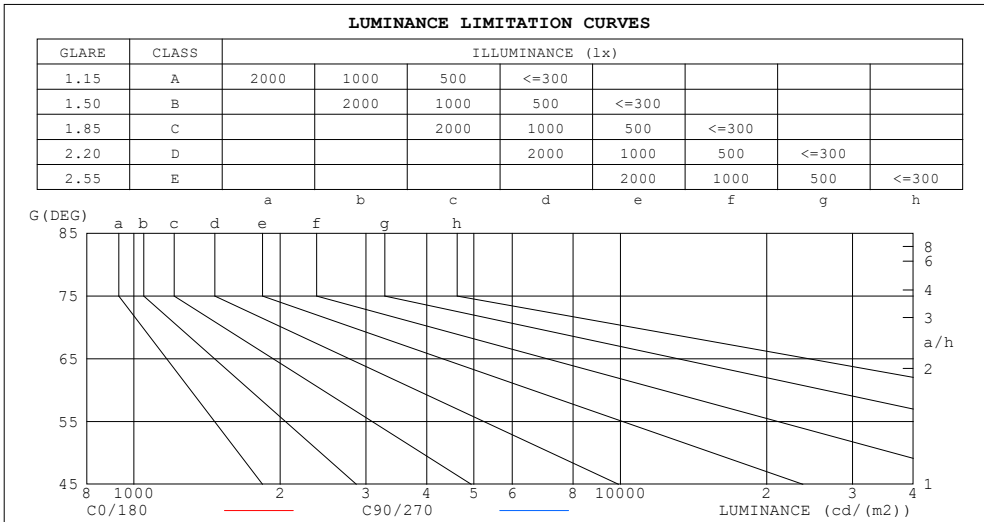

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	96	11
80	223	87
75	277	158
70	300	212
65	425	249
60	515	365
55	589	467
50	678	554
45	769	655


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.00	.98	.97	.96	.95	.94
2.0	1.03	.99	.96	1.02	.98	.95	.98	.96	.93	.95	.93	.91	.93	.91	.89	.87
3.0	.97	.92	.88	.95	.91	.87	.93	.89	.86	.90	.87	.85	.88	.86	.83	.82
4.0	.91	.86	.82	.90	.85	.81	.88	.83	.80	.86	.82	.79	.84	.81	.78	.77
5.0	.86	.80	.76	.85	.80	.76	.83	.79	.75	.81	.78	.74	.80	.77	.74	.72
6.0	.81	.75	.71	.80	.75	.71	.79	.74	.71	.77	.73	.70	.76	.73	.70	.68
7.0	.77	.71	.67	.76	.71	.67	.75	.70	.67	.74	.70	.66	.73	.69	.66	.65
8.0	.73	.67	.64	.73	.67	.63	.71	.67	.63	.70	.66	.63	.70	.66	.63	.61
9.0	.70	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.67	.63	.60	.58
10.0	.66	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.64	.60	.57	.56

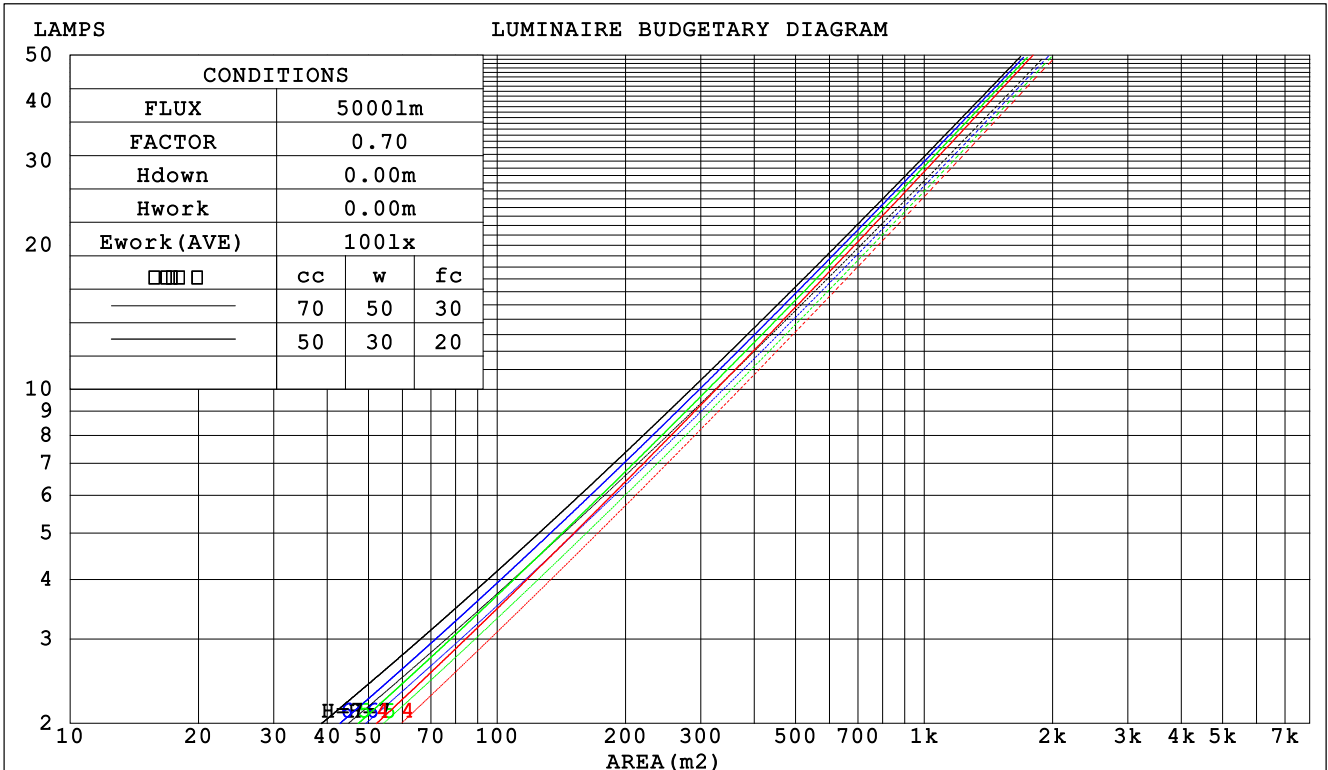

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.176 .100 .032	.170 .097 .031	.157 .090 .029	.145 .084 .027	.135 .078 .025	
2.0	.167 .092 .028	.162 .089 .027	.151 .084 .026	.142 .079 .025	.132 .075 .024	
3.0	.158 .084 .025	.153 .082 .025	.144 .078 .024	.136 .075 .023	.128 .071 .022	
4.0	.150 .078 .023	.145 .076 .022	.138 .073 .022	.130 .070 .021	.124 .067 .020	
5.0	.142 .072 .021	.138 .071 .021	.131 .068 .020	.125 .066 .020	.119 .064 .019	
6.0	.134 .067 .019	.131 .066 .019	.125 .064 .019	.120 .062 .018	.115 .060 .018	
7.0	.128 .063 .018	.125 .062 .018	.120 .061 .017	.115 .059 .017	.110 .057 .017	
8.0	.122 .060 .017	.119 .059 .017	.115 .057 .016	.110 .056 .016	.106 .055 .016	
9.0	.116 .056 .016	.114 .056 .016	.110 .054 .015	.106 .053 .015	.103 .052 .015	
10.0	.111 .053 .015	.109 .053 .015	.106 .052 .015	.102 .051 .014	.099 .050 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .086	.058 .054 .050	.018 .017 .016	
2.0	.156 .133 .113	.133 .114 .098	.091 .079 .068	.053 .046 .040	.017 .015 .013	
3.0	.143 .114 .090	.123 .098 .078	.084 .068 .055	.049 .040 .032	.016 .013 .011	
4.0	.132 .099 .073	.114 .085 .064	.078 .059 .045	.045 .035 .026	.015 .011 .009	
5.0	.123 .087 .060	.106 .075 .053	.073 .053 .037	.042 .031 .022	.014 .010 .007	
6.0	.115 .078 .051	.099 .067 .044	.068 .047 .031	.040 .028 .019	.013 .009 .006	
7.0	.109 .070 .043	.093 .061 .037	.065 .043 .026	.037 .025 .016	.012 .008 .005	
8.0	.103 .064 .037	.088 .055 .032	.061 .039 .023	.036 .023 .014	.012 .007 .004	
9.0	.097 .058 .032	.084 .051 .028	.058 .036 .020	.034 .021 .012	.011 .007 .004	
10.0	.093 .054 .028	.080 .047 .025	.055 .033 .017	.032 .019 .010	.010 .006 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm										
NAME: AD-LED-4-S15W-5CCTWH					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.8	7.7	7.0	7.8	8.0	5.3	6.2	5.5	6.4	6.5
3H	7.2	8.0	7.4	8.2	8.4	5.6	6.4	5.8	6.6	6.8
4H	7.3	8.1	7.6	8.3	8.5	5.6	6.4	5.9	6.6	6.9
6H	7.4	8.1	7.7	8.4	8.6	5.6	6.4	5.9	6.6	6.8
8H	7.4	8.1	7.7	8.4	8.6	5.6	6.3	5.9	6.5	6.8
12H	7.3	8.0	7.7	8.3	8.6	5.5	6.2	5.9	6.5	6.8
4H 2H	6.8	7.6	7.1	7.8	8.1	5.5	6.3	5.8	6.5	6.8
3H	7.3	8.0	7.6	8.3	8.6	5.9	6.6	6.2	6.8	7.1
4H	7.5	8.2	7.9	8.5	8.8	6.0	6.6	6.3	6.9	7.2
6H	7.7	8.2	8.1	8.6	8.9	6.0	6.6	6.4	6.9	7.2
8H	7.7	8.2	8.1	8.5	8.9	6.0	6.5	6.4	6.8	7.2
12H	7.7	8.1	8.1	8.5	8.9	5.9	6.4	6.3	6.8	7.1
8H 4H	7.5	8.0	7.9	8.4	8.7	6.0	6.5	6.4	6.9	7.2
6H	7.7	8.1	8.1	8.5	8.9	6.0	6.5	6.5	6.9	7.3
8H	7.7	8.1	8.2	8.5	8.9	6.0	6.4	6.5	6.8	7.2
12H	7.7	8.0	8.2	8.4	8.9	6.0	6.3	6.4	6.7	7.2
12H 4H	7.4	7.9	7.9	8.3	8.7	6.0	6.5	6.4	6.8	7.2
6H	7.6	8.0	8.1	8.4	8.9	6.0	6.4	6.5	6.8	7.3
8H	7.7	8.0	8.1	8.4	8.9	6.0	6.3	6.5	6.7	7.2
Variations with the observer position at spacings:										
S = 1.0H	+ 1.2 / - 1.0					+ 0.8 / - 1.0				
1.5H	+ 2.1 / - 0.9					+ 0.9 / - 0.6				
2.0H	+ 0.9 / - 1.0					+ 1.2 / - 1.7				

CIE Pub.117, 1014 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.0)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	85	79	75	85	78	74	84	78	74	71
0.80	93	87	83	92	86	83	91	86	82	78
1.00	98	92	88	97	91	88	95	91	87	83
1.25	102	96	93	101	96	92	99	95	91	87
1.50	105	100	96	103	99	96	101	97	94	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	110	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

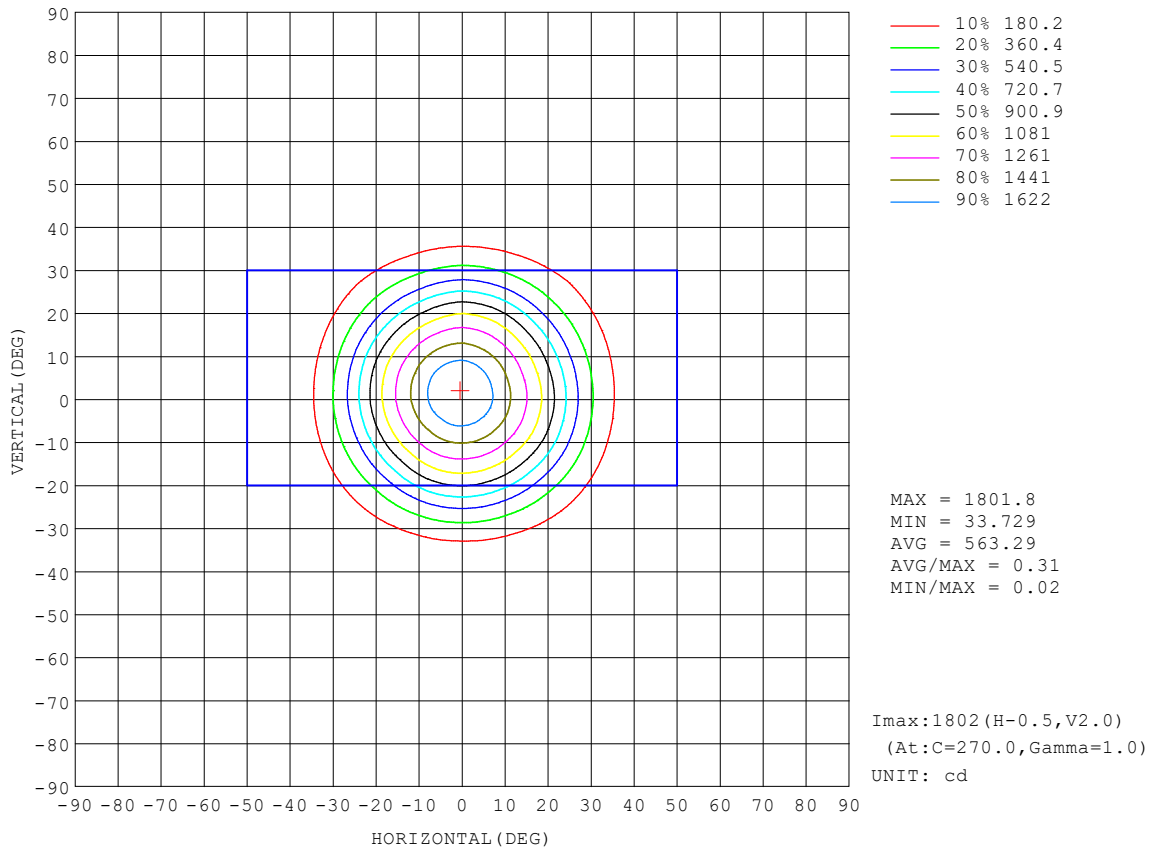


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

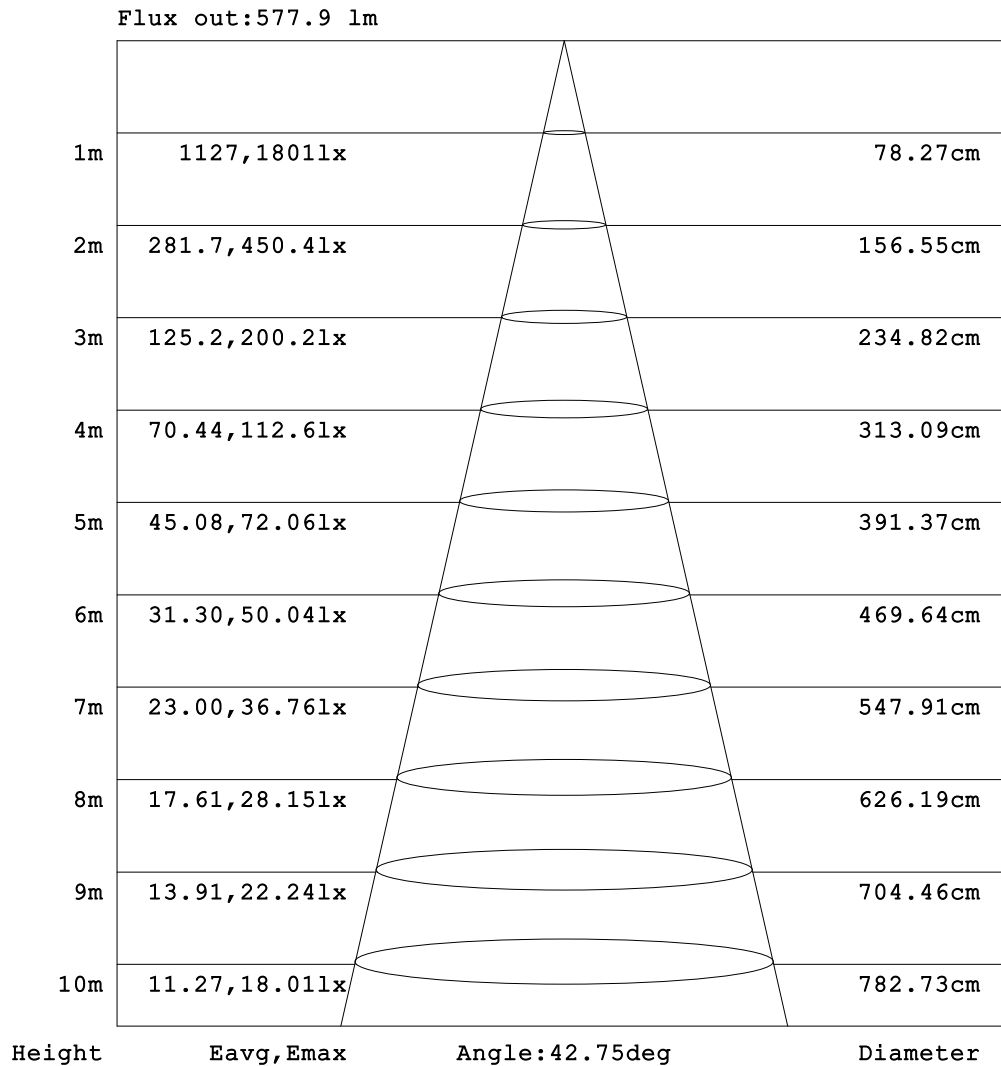


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

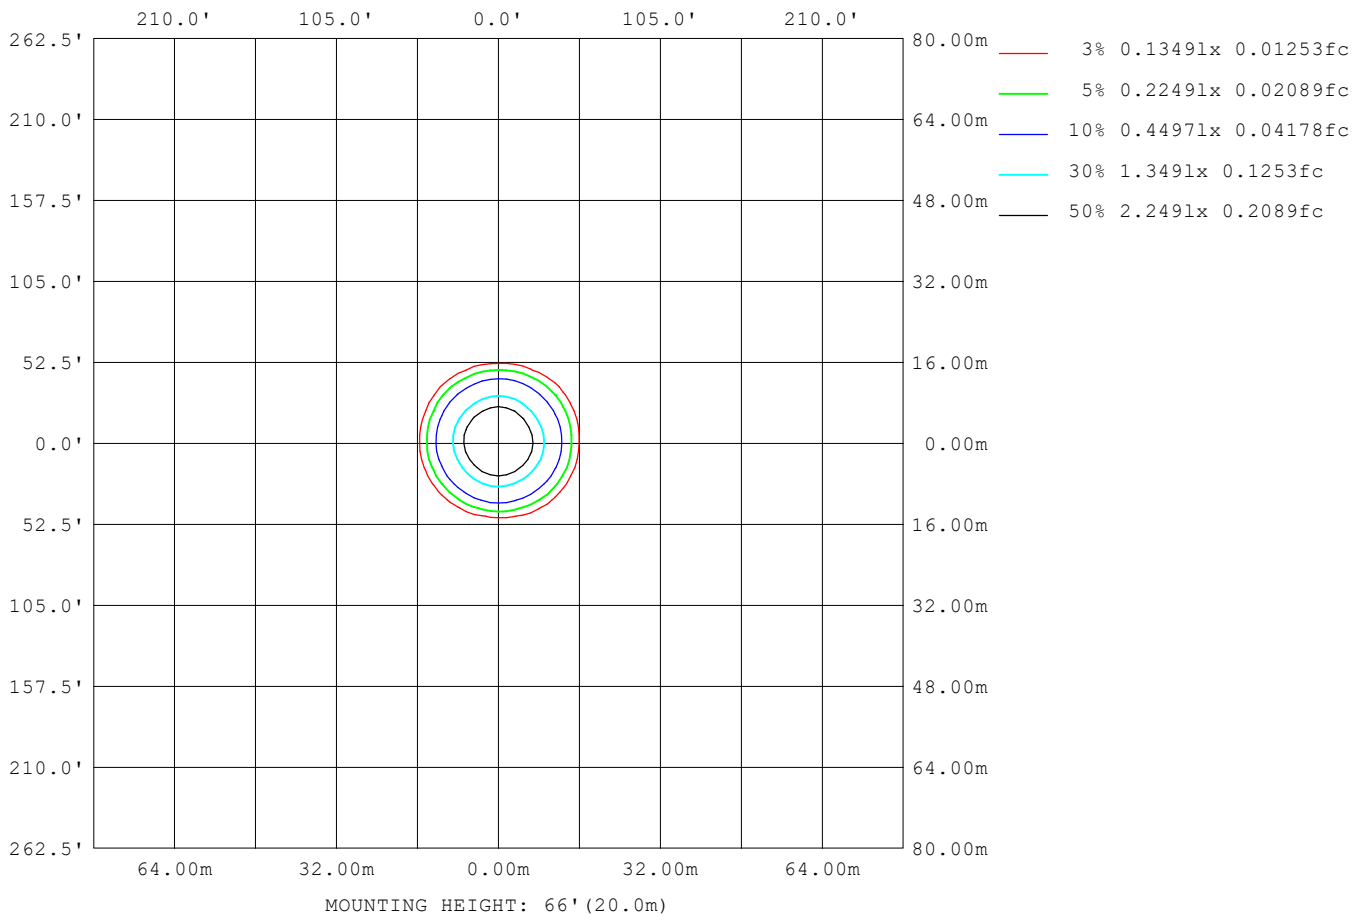

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	405
L_0~180 (75) av	269
L_0~180 (85) av	92
L_90~270 (65) av	282
L_90~270 (75) av	187
L_90~270 (85) av	32
L_45 (65) av	345
L_45 (75) av	218
L_45 (85) av	47

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

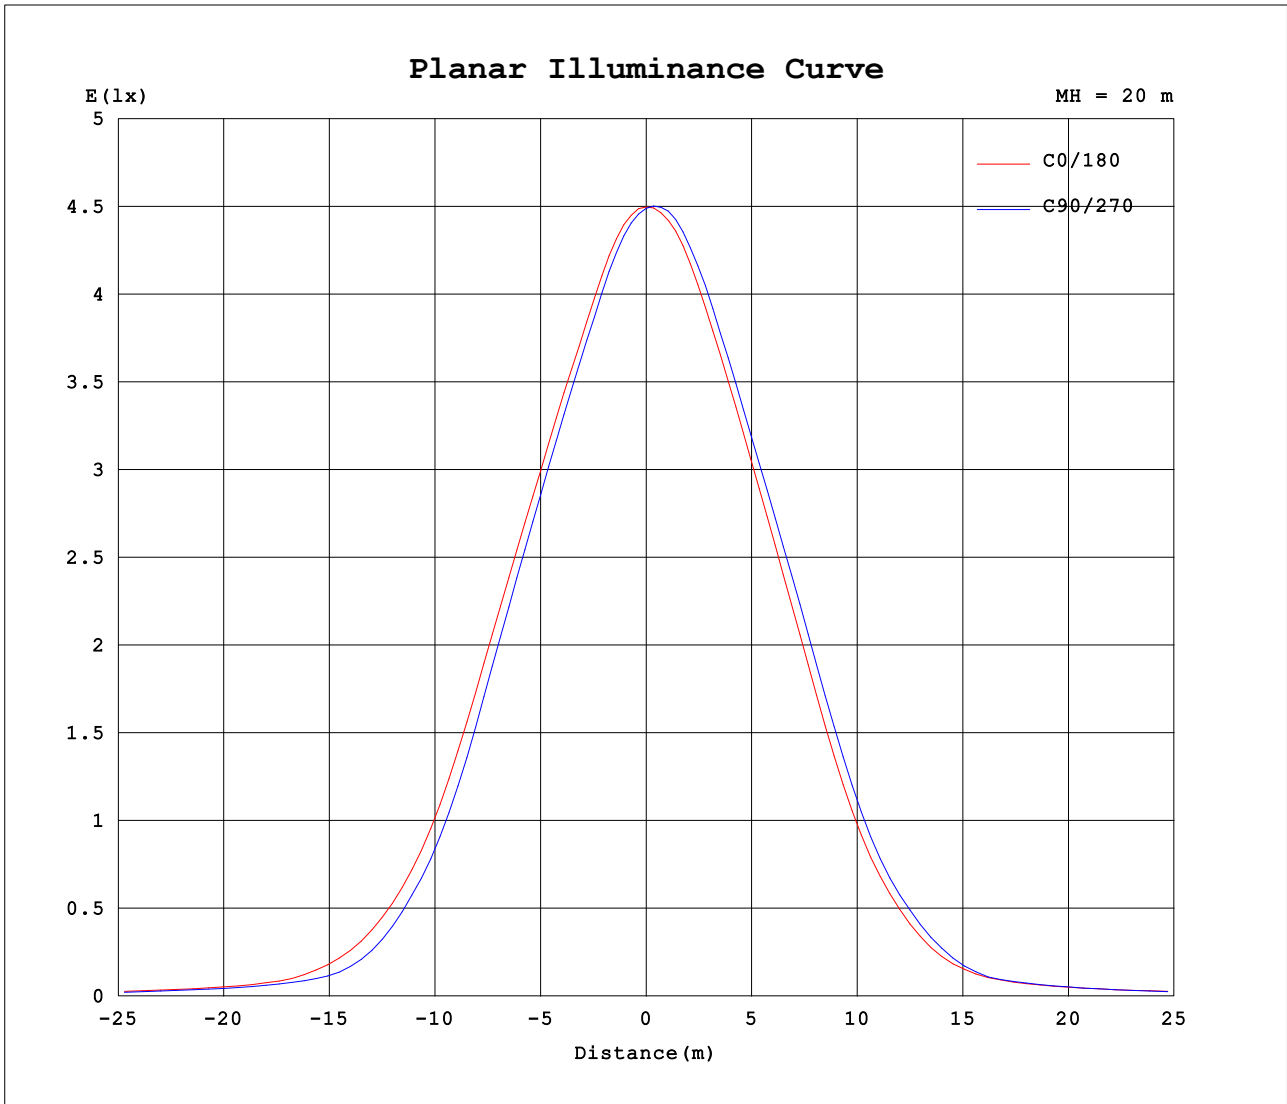

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-09-29

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.97V I:0.1086A P:12.816W PF:0.9448 Freq:59.98Hz Lamp Flux:1014.31x1 lm		
NAME: AD-LED-4-S15W-5CCTWH	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1797	1797	1797	1797	1797	1797	1797	1797	1797	1797	1797	1797	1797	1797	1797	1797			
5	1706	1691	1675	1671	1672	1677	1688	1712	1729	1745	1758	1761	1763	1749	1738	1719			
10	1495	1479	1458	1450	1450	1457	1465	1496	1528	1554	1573	1582	1582	1560	1536	1512			
15	1264	1244	1212	1204	1202	1207	1214	1244	1282	1310	1326	1338	1349	1326	1297	1273			
20	993	968	919	903	907	908	902	943	993	1021	1029	1044	1078	1055	1010	991			
25	666	639	585	565	563	564	561	599	648	677	683	697	734	713	674	664			
30	382	359	325	300	297	298	306	334	360	377	389	393	415	405	388	385			
35	190	177	159	136	124	128	143	156	165	179	197	189	200	200	212	202			
40	89.4	83.3	79.2	74.1	69.8	72.2	75.5	80.9	82.9	86.1	91.1	90.7	85.8	90.0	104	99.0			
45	60.3	58.6	55.2	52.3	51.5	52.3	54.3	56.2	58.6	59.8	59.6	59.1	59.9	61.6	62.2	61.2			
50	48.4	47.3	44.2	39.8	39.6	40.2	43.0	44.4	46.7	47.2	46.5	44.4	45.6	46.6	48.4	48.1			
55	37.5	35.9	32.6	30.2	29.7	30.8	31.8	33.3	35.4	36.3	35.7	33.1	33.8	34.8	37.5	37.2			
60	28.6	27.3	24.2	21.6	20.3	21.8	23.6	25.6	27.1	27.5	26.5	25.1	25.2	26.5	27.5	28.1			
65	19.9	18.4	14.7	12.4	11.7	12.0	14.0	16.6	18.1	18.7	17.3	14.8	14.8	15.4	18.8	19.9			
70	11.4	10.3	9.19	8.51	8.07	8.34	8.90	9.73	10.6	10.5	10.0	9.69	9.72	9.81	10.5	11.4			
75	7.95	7.00	5.75	4.89	4.55	4.80	5.56	6.68	7.52	7.23	6.78	6.32	6.23	6.43	7.04	7.59			
80	4.30	3.65	2.56	1.92	1.68	1.87	2.46	3.44	4.11	3.94	3.46	3.08	3.02	3.13	3.59	4.19			
85	0.93	0.98	0.16	0.10	0.11	0.09	0.12	0.88	0.84	1.21	0.76	0.55	0.50	0.52	0.77	1.36			
90	0.05	0.06	0.03	0.03	0.03	0.02	0.02	0.02	0.05	0.06	0.04	0.04	0.04	0.03	0.07	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-09-29

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: