
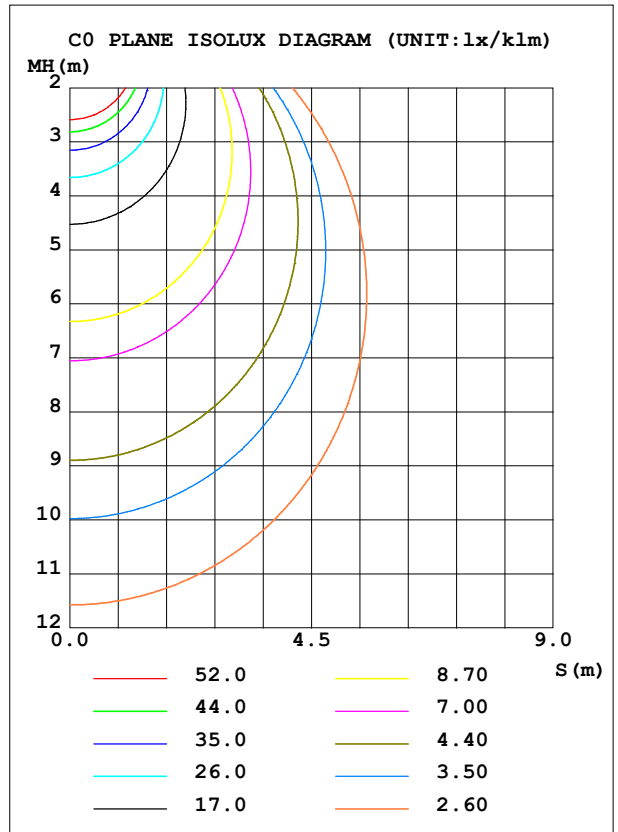


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL: CSC3030-LED-PIR-5CCT-WH		Imax (cd/klm)	351.5	S/MH (C0/180)	1.23
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	120.0	TOTAL FLUX (lm/klm)	1000.0	η UP, DN (C0-180)	0.0, 49.8
NOMINAL FLUX (lm)	674.906	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

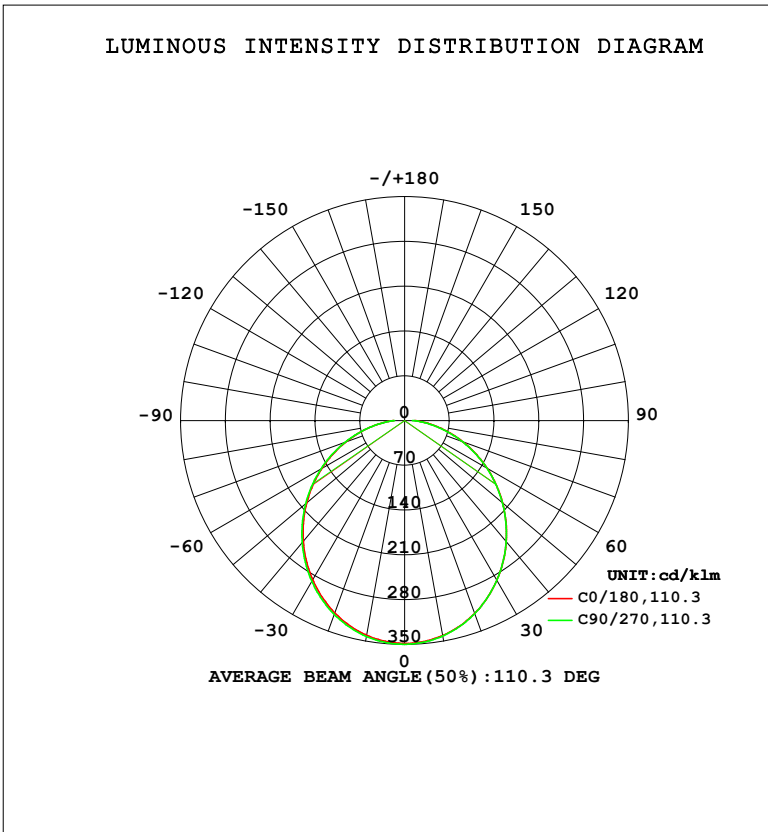

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity: 65.0%  
 Test Distance: 10.000m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	341.3	341.7	342.0	342.8	340.8	341.8	342.7	343.9	0- 10	33.02	33.02	3.3,3.3
20	320.7	321.0	320.9	321.3	319.8	321.2	322.3	323.3	10- 20	94.08	127.1	12.7,12.7
30	288.4	288.8	288.2	288.3	287.5	289.3	290.2	290.9	20- 30	141.3	268.4	26.8,26.8
40	247.3	247.8	247.1	246.8	246.5	248.4	249.1	249.4	30- 40	168.6	436.9	43.7,43.7
50	199.9	200.3	199.6	199.4	199.7	201.5	202.0	202.0	40- 50	173.5	610.5	61,61
60	148.8	149.2	148.4	148.4	149.3	151.0	151.1	150.8	50- 60	157.0	767.4	76.7,76.7
70	96.70	96.85	95.87	96.21	97.66	99.15	98.85	98.31	60- 70	122.3	889.7	89,89
80	48.98	48.89	47.25	48.54	50.28	51.42	50.16	49.76	70- 80	76.79	966.5	96.7,96.7
90	15.78	15.73	12.24	12.06	16.72	16.88	15.98	15.53	80- 90	33.47	1000	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd/klm									UNIT:lm/klm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:  
 Test Date:2024-05-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

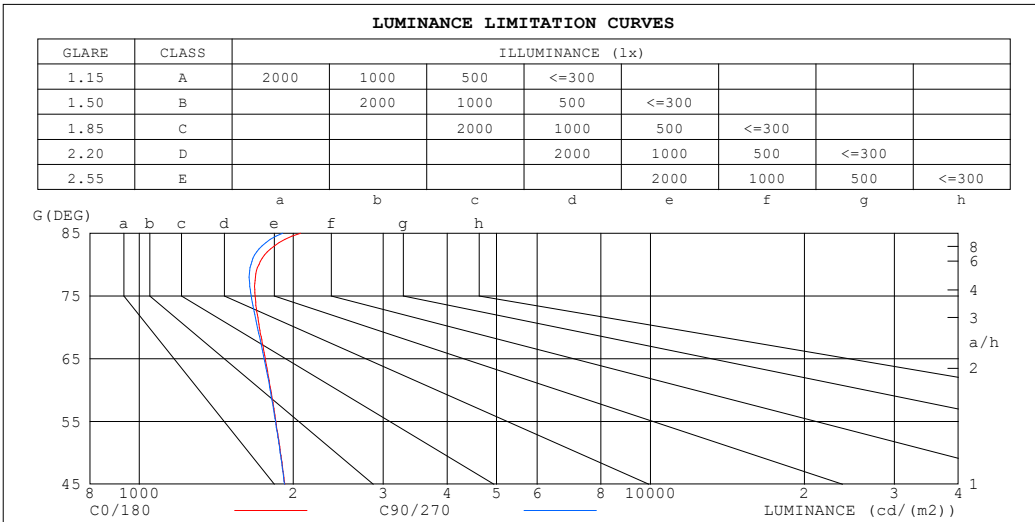

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2067	1908
80	1713	1653
75	1685	1655
70	1717	1703
65	1763	1755
60	1808	1803
55	1850	1847
50	1889	1886
45	1926	1923


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.03	.98	.94	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.89	.87	.84	.82
2.0	.89	.82	.76	.88	.81	.75	.84	.78	.74	.81	.76	.72	.78	.74	.70	.68
3.0	.78	.70	.63	.77	.69	.63	.74	.67	.62	.71	.65	.60	.68	.64	.59	.57
4.0	.69	.60	.54	.68	.60	.53	.66	.58	.52	.63	.57	.52	.61	.55	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.45	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.44	.39	.50	.44	.39	.37
7.0	.51	.42	.35	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.40	.33	.28	.39	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.25	.24

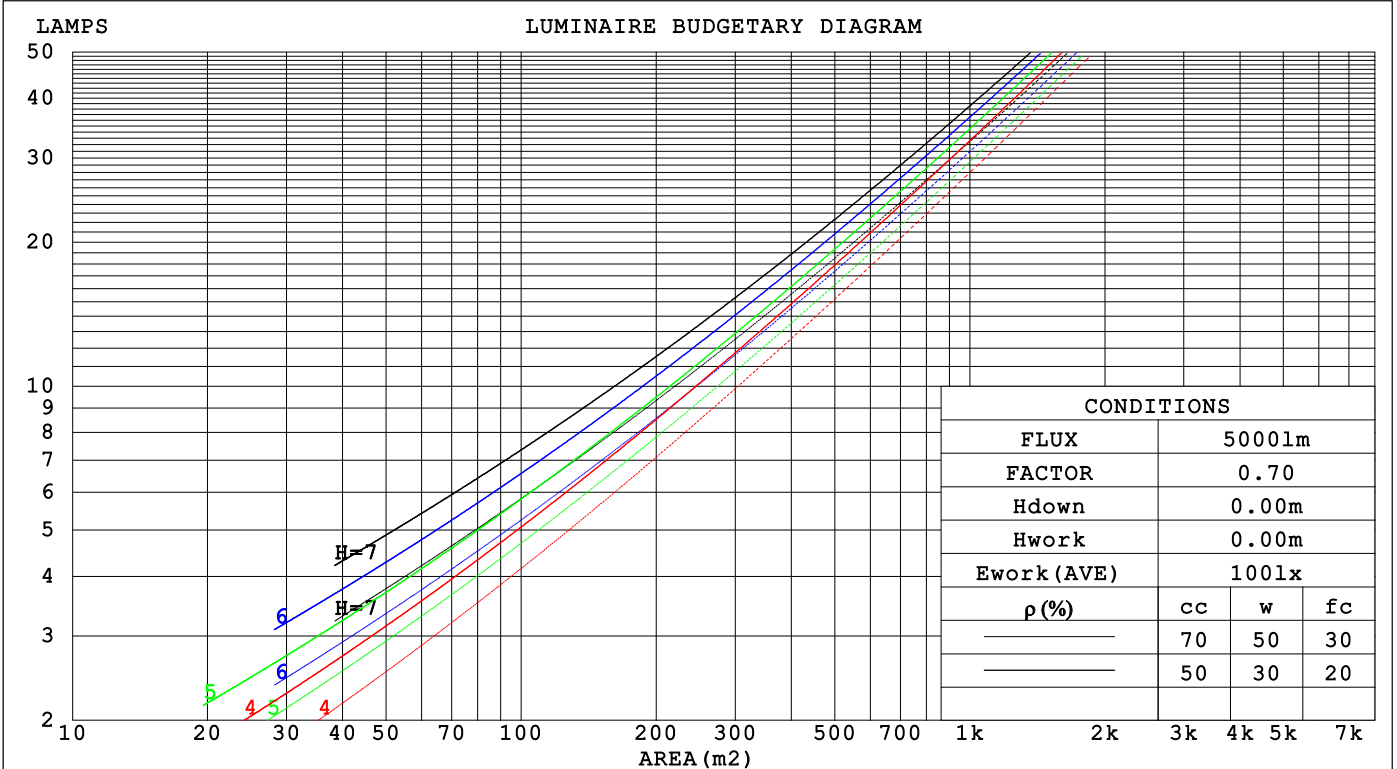

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:  
Test Date:2024-05-29

γ Range: 0 - 90DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
Humidity:65.0%  
Test Distance:10.000m [K=1.0000]  
Remarks:

WEC AND CCEC

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz		
Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.328	.186	.059	.320	.183	.058	.307	.176	.056	.295	.170	.055	.284	.164	.053	
2.0	.301	.165	.051	.295	.163	.050	.283	.158	.049	.273	.153	.048	.263	.148	.047	
3.0	.276	.147	.044	.271	.145	.044	.260	.141	.043	.251	.137	.042	.242	.134	.041	
4.0	.253	.132	.039	.248	.130	.038	.239	.127	.038	.231	.124	.037	.223	.121	.037	
5.0	.233	.119	.034	.229	.118	.034	.221	.115	.034	.213	.112	.033	.206	.110	.033	
6.0	.216	.108	.031	.212	.107	.031	.205	.105	.031	.198	.103	.030	.191	.101	.030	
7.0	.200	.099	.028	.197	.098	.028	.191	.096	.028	.184	.095	.028	.179	.093	.027	
8.0	.187	.091	.026	.184	.091	.026	.178	.089	.025	.173	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.149	.075	.021	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.182	.156	.133	.155	.134	.114	.106	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.174	.132	.097	.149	.114	.084	.102	.079	.058	.059	.046	.034	.019	.015	.011	
3.0	.166	.114	.073	.142	.099	.064	.098	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.158	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.052	.032	.017	.017	.011	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.101	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-05-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.3	17.8	16.6	18.0	18.2	16.3	17.8	16.6	18.0	18.2
3H	17.9	19.3	18.2	19.6	19.8	17.9	19.3	18.2	19.5	19.8
4H	18.6	20.0	18.9	20.2	20.5	18.6	19.9	18.9	20.2	20.4
6H	19.2	20.5	19.5	20.8	21.0	19.1	20.4	19.5	20.7	21.0
8H	19.5	20.7	19.8	21.0	21.3	19.4	20.6	19.7	20.9	21.2
12H	19.7	20.9	20.0	21.2	21.5	19.6	20.8	19.9	21.1	21.4
4H 2H	16.9	18.3	17.2	18.5	18.8	16.9	18.3	17.2	18.5	18.8
3H	18.7	19.9	19.1	20.2	20.5	18.7	19.9	19.1	20.2	20.5
4H	19.6	20.7	20.0	21.0	21.3	19.5	20.6	19.9	21.0	21.3
6H	20.3	21.3	20.7	21.7	22.0	20.3	21.2	20.7	21.6	22.0
8H	20.7	21.6	21.1	21.9	22.3	20.6	21.5	21.0	21.9	22.2
12H	21.0	21.8	21.4	22.2	22.6	20.9	21.7	21.3	22.1	22.5
8H 4H	19.9	20.8	20.3	21.2	21.6	19.9	20.8	20.3	21.2	21.5
6H	20.8	21.6	21.3	22.0	22.4	20.8	21.5	21.2	22.0	22.4
8H	21.3	22.0	21.8	22.4	22.9	21.2	21.9	21.7	22.3	22.8
12H	21.8	22.4	22.2	22.8	23.3	21.6	22.2	22.1	22.7	23.2
12H 4H	19.9	20.8	20.4	21.2	21.6	19.9	20.7	20.3	21.1	21.5
6H	20.9	21.6	21.4	22.1	22.5	20.9	21.6	21.3	22.0	22.4
8H	21.5	22.1	21.9	22.5	23.0	21.4	22.0	21.9	22.4	22.9

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.1 / - 0.3	+ 0.1 / - 0.3

CIE Pub.117, 674.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.4)  
Area: 0.111111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 0.5DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.479
Temperature:25.3℃	Humidity:65.0%
Operators:	Test Distance:10.000m [K=1.0000]
Test Date:2024-05-29	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	48
1.25	82	72	64	81	71	64	78	69	63	56
1.50	87	77	70	86	76	69	82	74	68	61
2.00	94	85	79	92	84	78	89	82	76	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	101	94	88	99	93	87	95	90	85	77
4.00	105	99	95	103	98	93	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-05-29

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

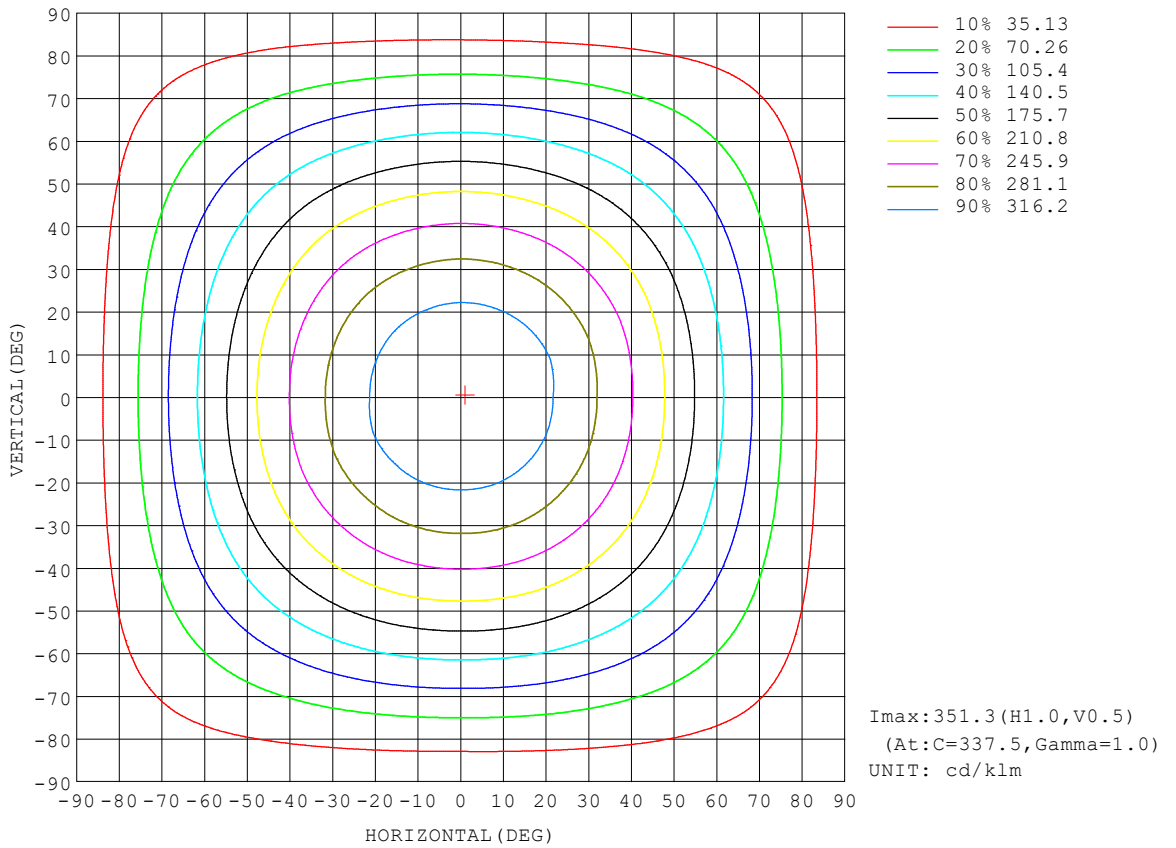


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:  
 Test Date:2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

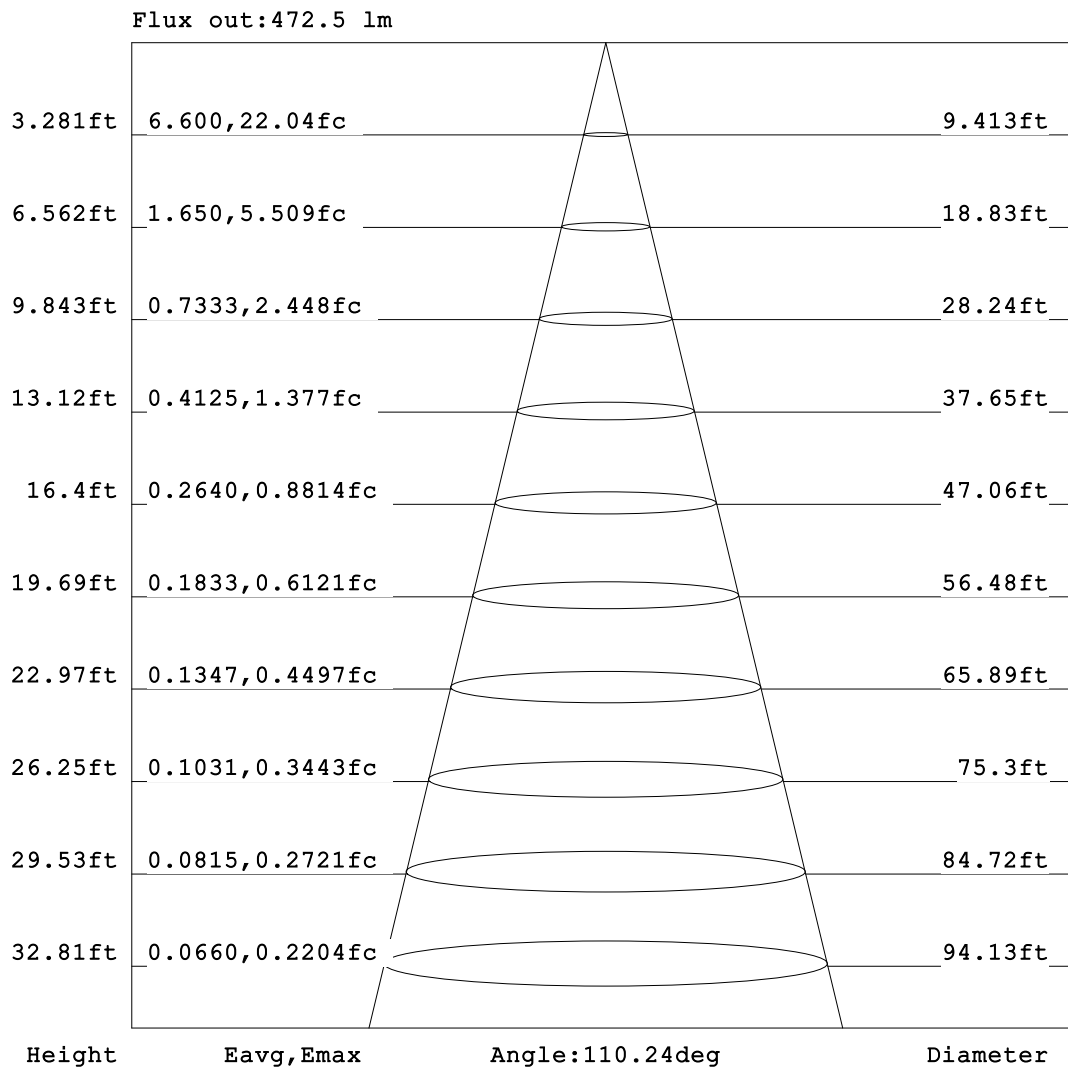


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

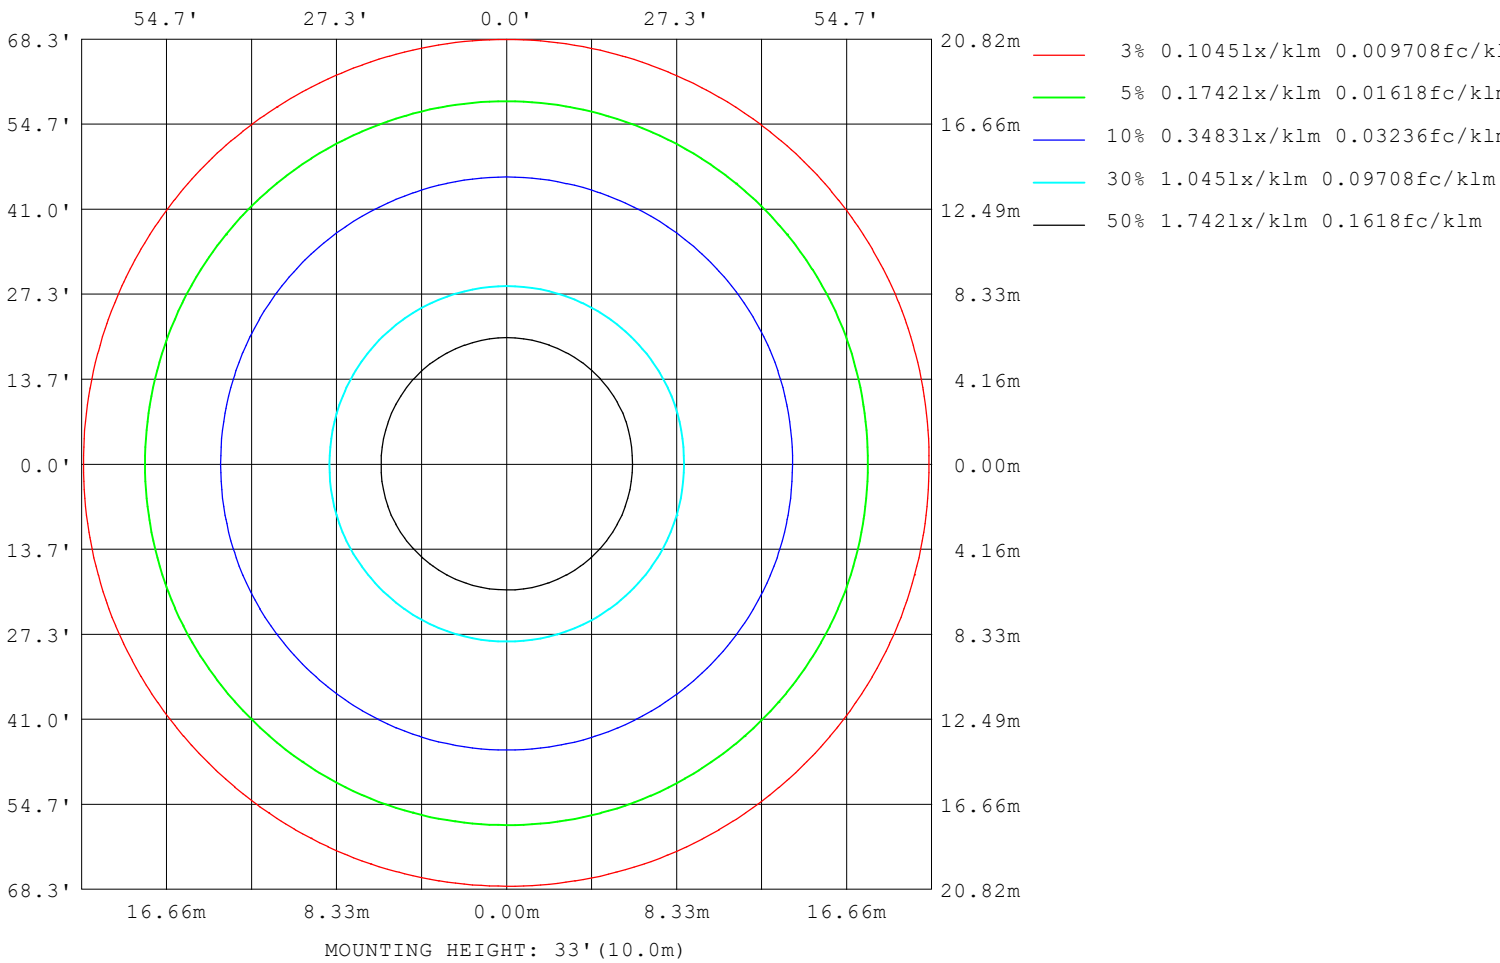

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1769
L_0~180 (75) av	1700
L_0~180 (85) av	2114
L_90~270 (65) av	1775
L_90~270 (75) av	1690
L_90~270 (85) av	2015
L_45 (65) av	1778
L_45 (75) av	1701
L_45 (85) av	2089

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:  
 Test Date:2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity:65.0%  
 Test Distance:10.000m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

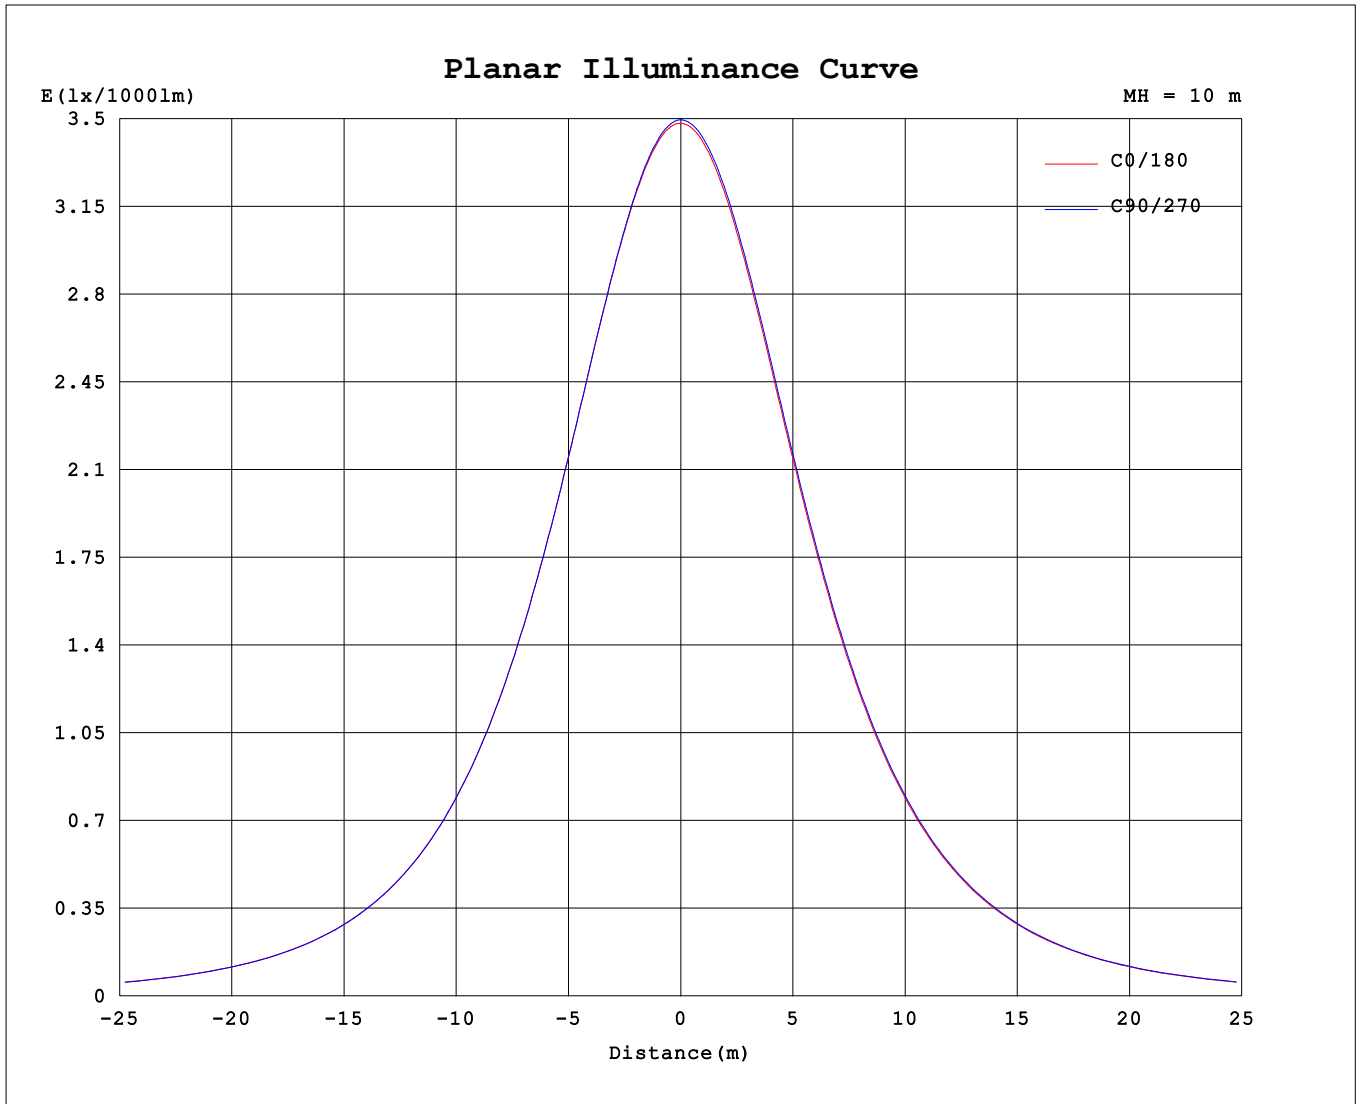

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity: 65.0%  
 Test Distance: 10.000m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.30V I:0.0955A P:10.376W PF:0.9033 Freq:59.98Hz Lamp Flux:674.906x1 lm		
NAME: CSC3030-LED-PIR-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd/klm

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	348	349	349	349	350	350	351	351	348	349	349	349	350	350	351	351			
5	347	347	347	347	348	348	349	349	346	347	347	347	348	348	349	350			
10	341	342	342	342	342	342	343	344	341	341	342	342	343	343	344	345			
15	333	333	333	333	333	333	334	335	332	332	333	333	334	335	335	336			
20	321	321	321	321	321	321	321	322	320	320	321	322	322	323	323	324			
25	306	306	306	306	306	306	306	307	305	305	306	307	307	308	308	309			
30	288	289	289	289	288	289	288	289	288	288	289	289	290	290	291	291			
35	269	269	269	269	269	269	268	269	268	269	270	270	271	271	271	272			
40	247	248	248	248	247	247	247	248	246	247	248	249	249	249	249	250			
45	224	225	225	225	224	224	224	225	224	224	226	226	226	226	226	227			
50	200	201	200	201	200	200	199	200	200	201	202	202	202	202	202	202			
55	175	175	175	175	174	175	174	175	175	176	177	177	177	176	177	177			
60	149	150	149	149	148	149	148	149	149	150	151	151	151	151	151	151			
65	123	123	123	123	122	122	122	123	123	124	125	125	125	124	125	124			
70	96.7	97.3	96.8	96.8	95.9	96.3	96.2	97.3	97.7	98.2	99.2	98.7	98.9	98.1	98.3	98.1			
75	71.8	72.2	71.7	71.5	70.5	70.9	71.1	72.5	73.0	73.5	74.2	73.6	73.5	72.9	73.0	72.8			
80	49.0	49.4	48.9	48.2	47.3	47.7	48.5	49.7	50.3	50.9	51.4	50.5	50.2	49.6	49.8	49.7			
85	29.7	30.0	29.5	28.4	27.4	27.9	28.8	30.4	31.0	31.4	31.5	30.9	30.5	30.0	30.0	30.0			
90	15.8	15.8	15.7	14.1	12.2	12.9	12.1	16.2	16.7	17.0	16.9	16.5	16.0	15.7	15.5	15.8			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators:  
 Test Date: 2024-05-29

γ Range: 0 - 90DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.479  
 Humidity: 65.0%  
 Test Distance: 10.000m [K=1.0000]  
 Remarks: