
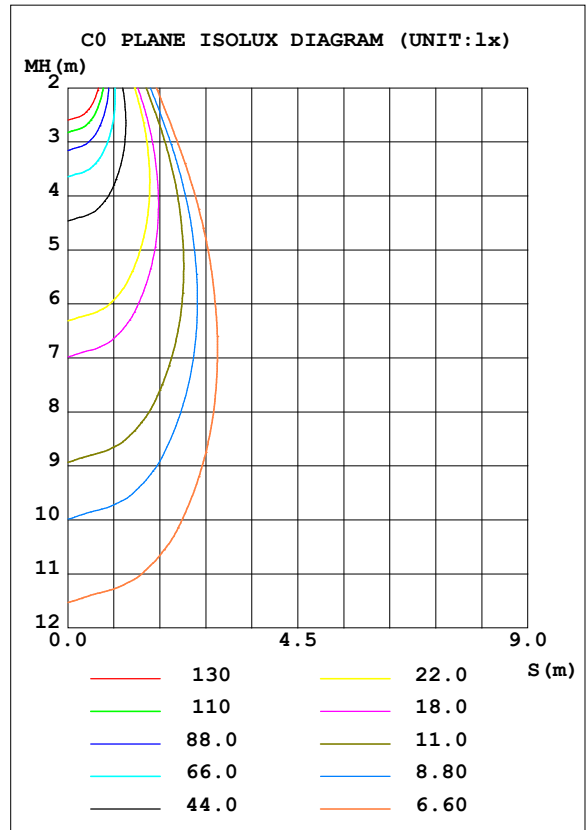


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	LBL-JB10W-5CCT	Imax (cd)	934.6	S/MH (C0/180)	0.81
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	0.73
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	643.14	<input type="checkbox"/> UP, DN (C0-180)	0.0, 51.0
NOMINAL FLUX (lm)	643.142	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 49.0
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.75

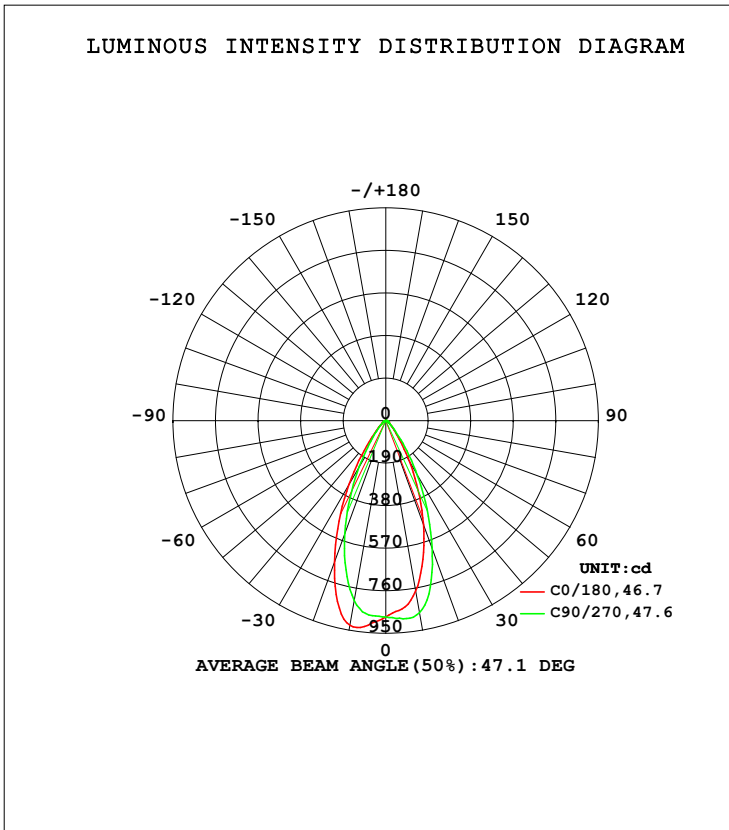

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	772.4	810.4	870.8	918.4	927.2	875.9	814.9	777.6	0- 10	83.01	83.01	12.9,12.9
20	493.0	530.3	606.3	670.4	670.4	602.2	536.3	492.1	10- 20	201.4	284.4	44.2,44.2
30	214.6	240.3	285.6	323.1	329.5	287.7	237.3	219.3	20- 30	188.2	472.6	73.5,73.5
40	66.69	73.37	84.42	93.48	93.73	80.84	74.01	69.73	30- 40	97.18	569.8	88.6,88.6
50	27.58	29.77	29.42	31.52	30.51	28.22	27.58	27.10	40- 50	37.54	607.4	94.4,94.4
60	14.17	15.19	13.71	14.03	13.57	13.20	12.75	13.02	50- 60	17.62	625.0	97.2,97.2
70	8.827	9.337	7.991	8.255	8.479	8.404	7.924	8.153	60- 70	10.78	635.8	98.9,98.9
80	4.212	3.726	3.090	3.190	3.822	3.609	3.548	3.794	70- 80	6.158	641.9	99.8,99.8
90	0.0167	0.0134	0.0151	0.0154	0.0257	0.0257	0.0251	0.0240	80- 90	1.223	643.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

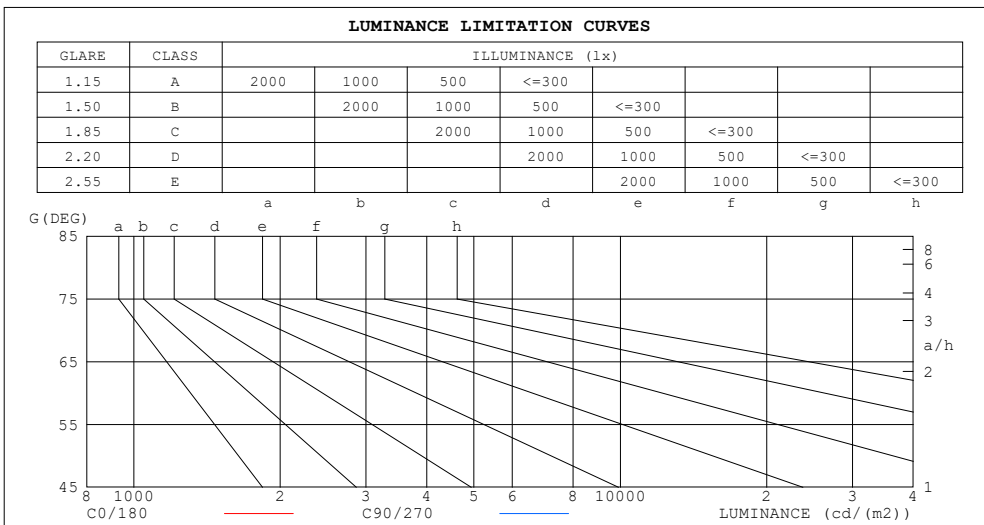

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	29	9
80	219	160
75	224	183
70	233	210
65	233	231
60	255	246
55	302	285
50	387	411
45	537	620


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.03	.98	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.87	.94	.90	.86	.92	.88	.84	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.76	.73	.80	.75	.72	.78	.74	.72	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.68	.64	.73	.68	.64	.71	.67	.64	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.64	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.58
9.0	.67	.61	.57	.66	.61	.57	.66	.60	.57	.65	.60	.57	.64	.60	.57	.55
10.0	.64	.58	.54	.63	.58	.54	.62	.57	.54	.62	.57	.54	.61	.57	.54	.52

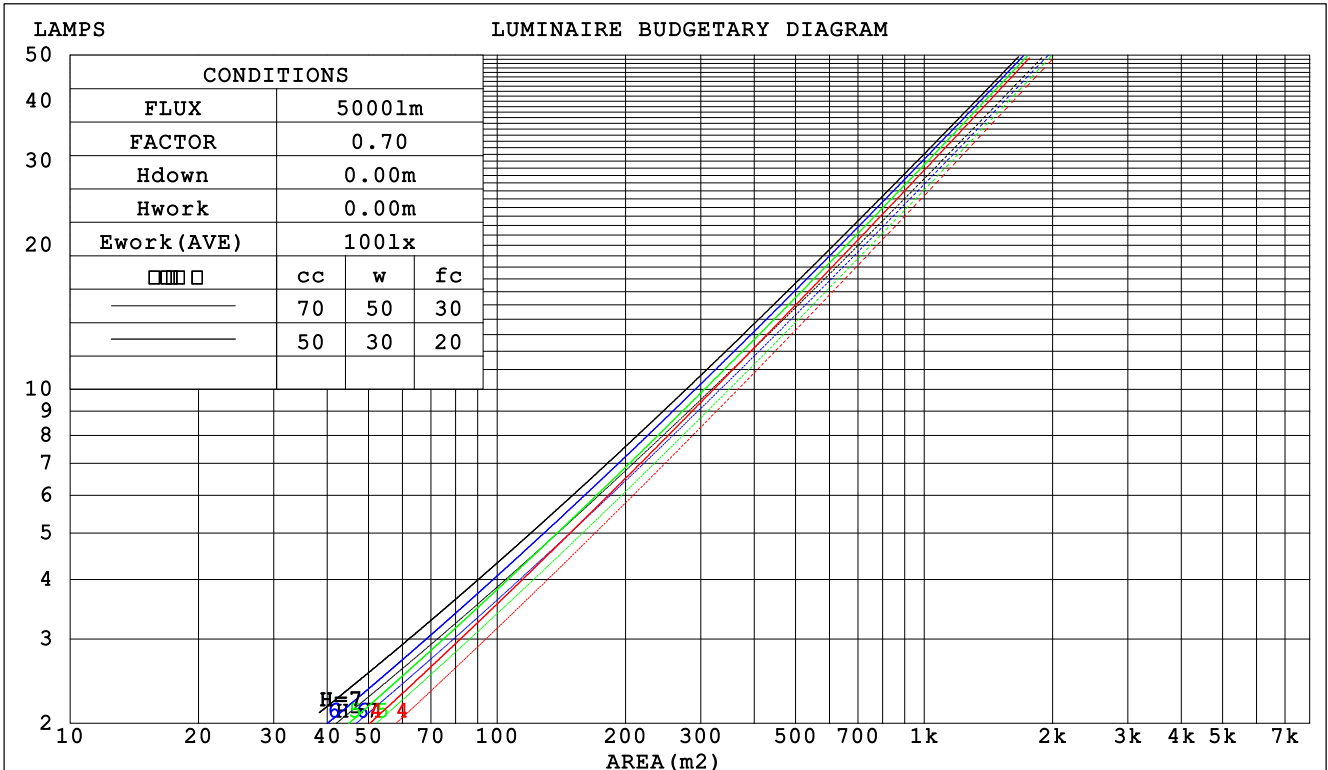

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.184 .105 .033	.178 .101 .032	.165 .095 .030	.153 .088 .028	.143 .083 .027	
2.0	.175 .096 .029	.170 .093 .029	.159 .088 .027	.149 .084 .026	.140 .079 .025	
3.0	.166 .088 .026	.161 .086 .026	.152 .082 .025	.143 .079 .024	.136 .075 .023	
4.0	.157 .081 .024	.153 .080 .024	.145 .077 .023	.137 .074 .022	.131 .071 .022	
5.0	.148 .076 .022	.145 .074 .022	.138 .072 .021	.132 .069 .021	.126 .067 .020	
6.0	.141 .071 .020	.138 .070 .020	.132 .068 .020	.126 .066 .019	.121 .064 .019	
7.0	.134 .066 .019	.131 .065 .019	.126 .064 .018	.121 .062 .018	.116 .060 .018	
8.0	.128 .062 .018	.125 .062 .017	.121 .060 .017	.116 .059 .017	.112 .057 .017	
9.0	.122 .059 .016	.120 .058 .016	.116 .057 .016	.112 .056 .016	.108 .055 .016	
10.0	.117 .056 .016	.115 .055 .015	.111 .054 .015	.107 .053 .015	.104 .052 .015	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.172 .157 .144	.147 .135 .124	.100 .093 .086	.058 .054 .050	.019 .017 .016	
2.0	.157 .132 .112	.134 .114 .097	.092 .079 .068	.053 .046 .040	.017 .015 .013	
3.0	.144 .114 .089	.124 .098 .077	.085 .068 .054	.049 .040 .032	.016 .013 .010	
4.0	.134 .099 .072	.115 .085 .063	.079 .060 .044	.046 .035 .026	.015 .011 .009	
5.0	.125 .087 .059	.108 .076 .052	.074 .053 .036	.043 .031 .022	.014 .010 .007	
6.0	.118 .078 .050	.101 .068 .043	.070 .047 .031	.040 .028 .018	.013 .009 .006	
7.0	.111 .070 .042	.095 .061 .037	.066 .043 .026	.038 .025 .015	.012 .008 .005	
8.0	.105 .064 .036	.090 .056 .031	.063 .039 .022	.036 .023 .013	.012 .008 .004	
9.0	.100 .059 .031	.086 .051 .027	.060 .036 .019	.035 .021 .012	.011 .007 .004	
10.0	.095 .055 .027	.082 .047 .024	.057 .033 .017	.033 .020 .010	.011 .006 .003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.8	7.8	7.0	7.9	8.1	7.5	8.4	7.7	8.6	8.8
3H	7.3	8.2	7.6	8.4	8.6	7.8	8.7	8.1	8.9	9.1
4H	7.6	8.4	7.9	8.7	8.9	8.0	8.8	8.2	9.0	9.2
6H	7.9	8.6	8.2	8.9	9.1	8.1	8.8	8.4	9.1	9.3
8H	7.9	8.6	8.2	8.9	9.2	8.1	8.8	8.4	9.1	9.3
12H	7.8	8.6	8.2	8.8	9.1	8.0	8.7	8.3	9.0	9.3
4H 2H	6.9	7.8	7.2	8.0	8.2	7.5	8.4	7.8	8.6	8.8
3H	7.7	8.4	8.0	8.7	8.9	8.0	8.8	8.4	9.0	9.3
4H	8.1	8.7	8.4	9.0	9.3	8.3	8.9	8.6	9.2	9.5
6H	8.4	9.0	8.8	9.3	9.7	8.5	9.1	8.9	9.4	9.7
8H	8.5	9.0	8.9	9.4	9.7	8.5	9.0	8.9	9.4	9.8
12H	8.5	8.9	8.9	9.3	9.7	8.5	8.9	8.9	9.3	9.7
8H 4H	8.2	8.7	8.6	9.0	9.4	8.4	8.9	8.8	9.3	9.6
6H	8.6	9.1	9.1	9.5	9.9	8.6	9.1	9.1	9.5	9.9
8H	8.8	9.1	9.2	9.6	10.0	8.7	9.1	9.1	9.5	9.9
12H	8.7	9.1	9.2	9.5	10.0	8.6	9.0	9.1	9.4	9.9
12H 4H	8.1	8.6	8.5	9.0	9.4	8.3	8.8	8.8	9.2	9.6
6H	8.6	9.0	9.1	9.5	9.9	8.7	9.0	9.1	9.5	9.9
8H	8.8	9.1	9.2	9.6	10.0	8.7	9.0	9.2	9.5	10.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.1					+ 1.7 / - 1.7				
1.5H	+ 1.5 / - 0.8					+ 2.9 / - 1.4				
2.0H	+ 1.3 / - 0.7					+ 2.1 / - 1.0				

CIE Pub.117, 643.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.5)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	84	78	74	84	77	73	83	77	73	69
0.80	92	86	82	91	85	82	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	96	92	100	95	91	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	102	98	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

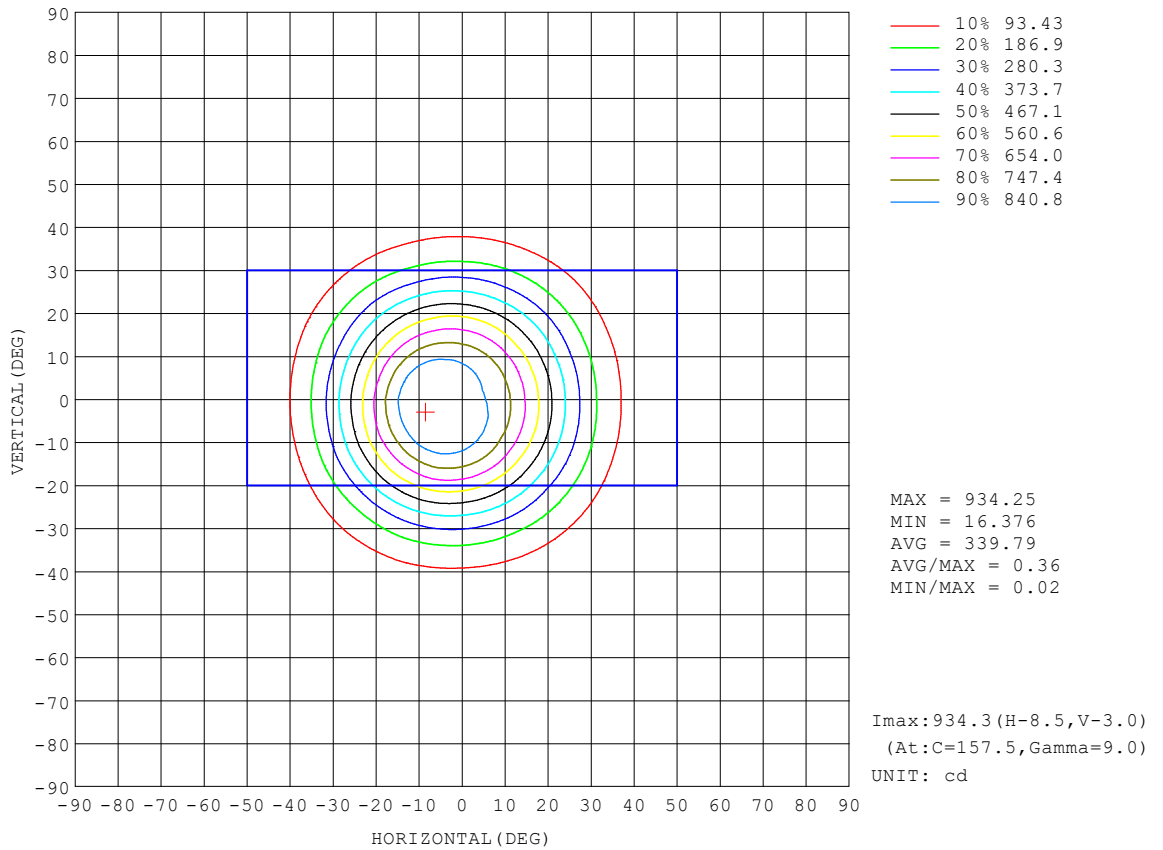


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

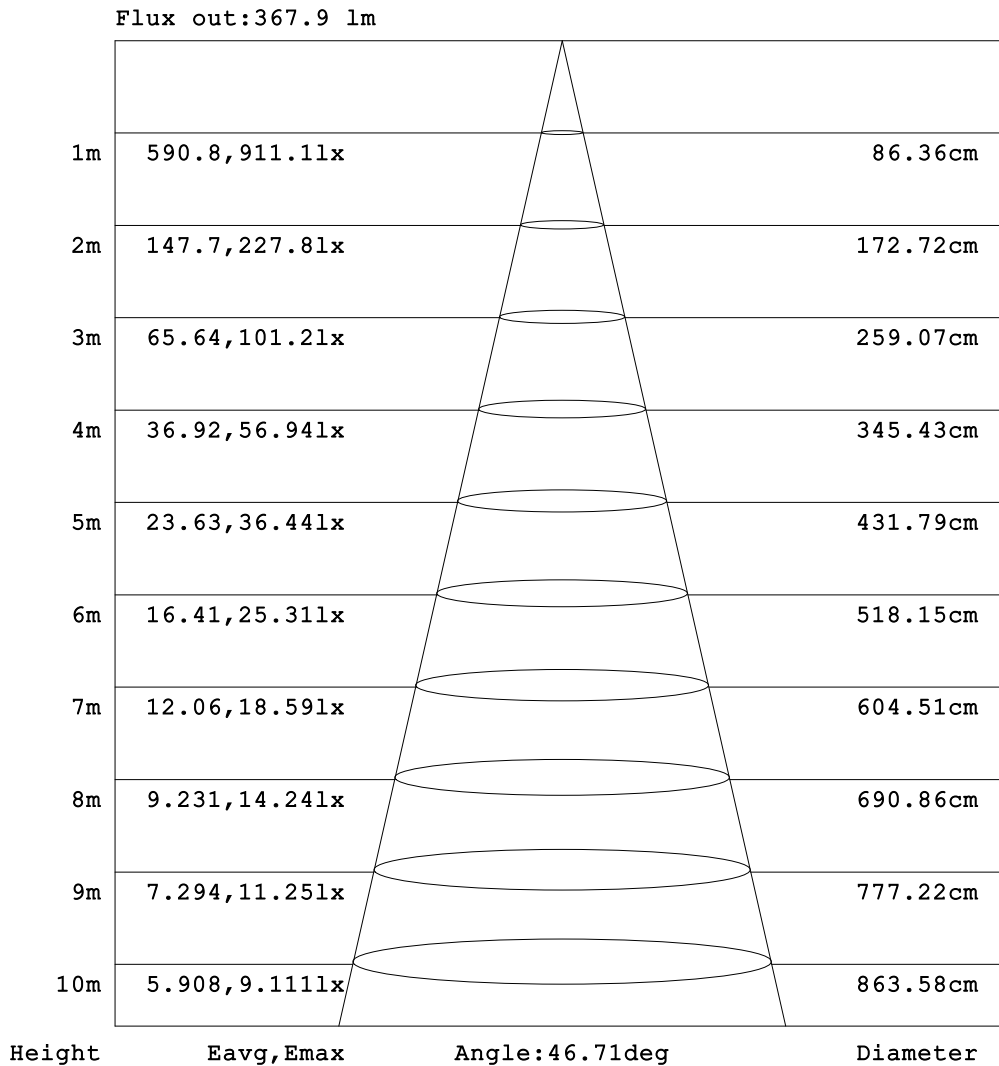


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

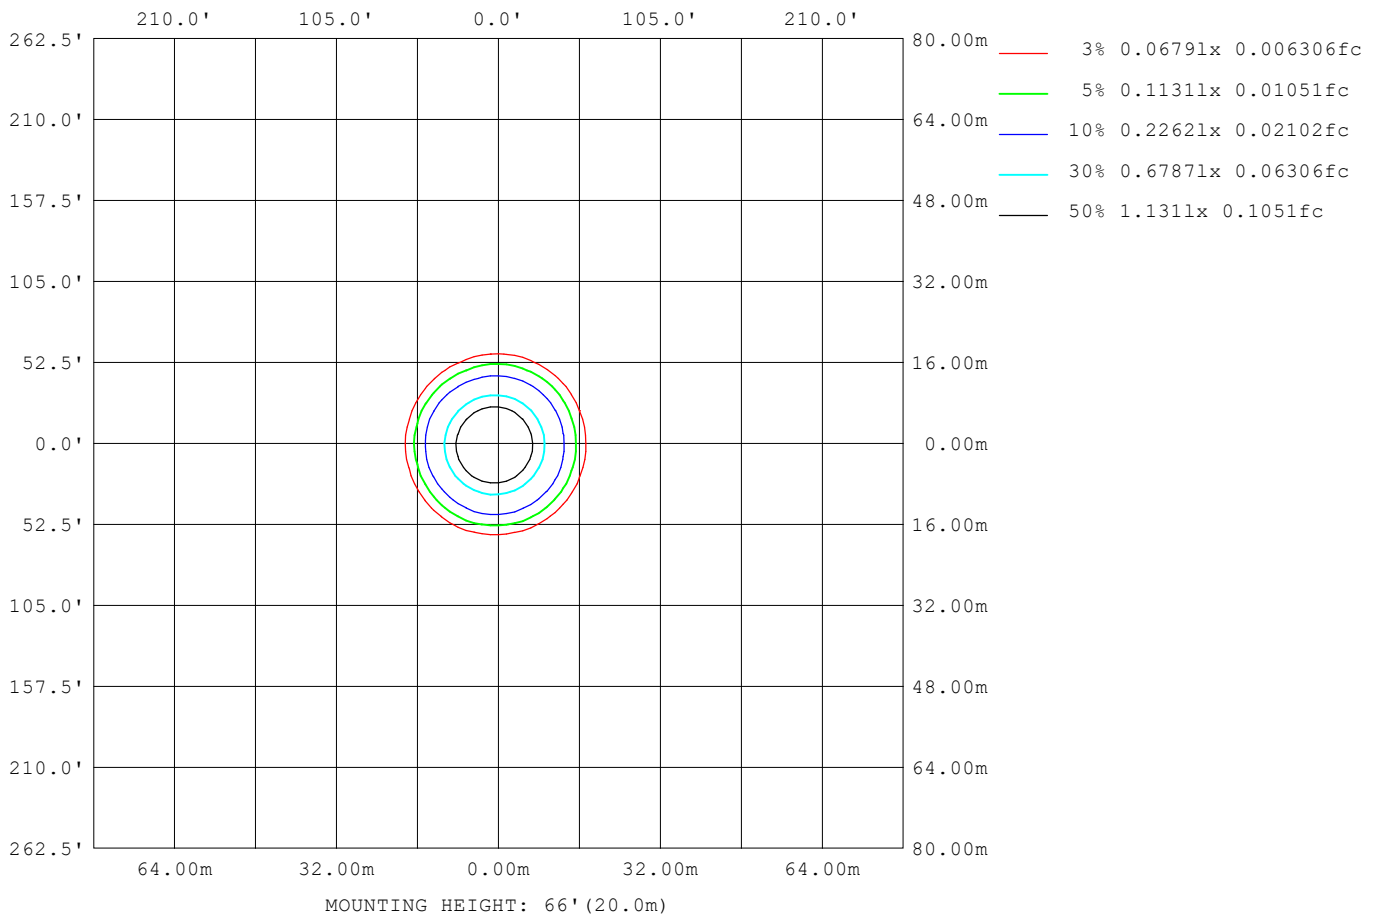

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	234
L_0~180 (75) av	215
L_0~180 (85) av	31
L_90~270 (65) av	225
L_90~270 (75) av	188
L_90~270 (85) av	12
L_45 (65) av	237
L_45 (75) av	201
L_45 (85) av	46

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

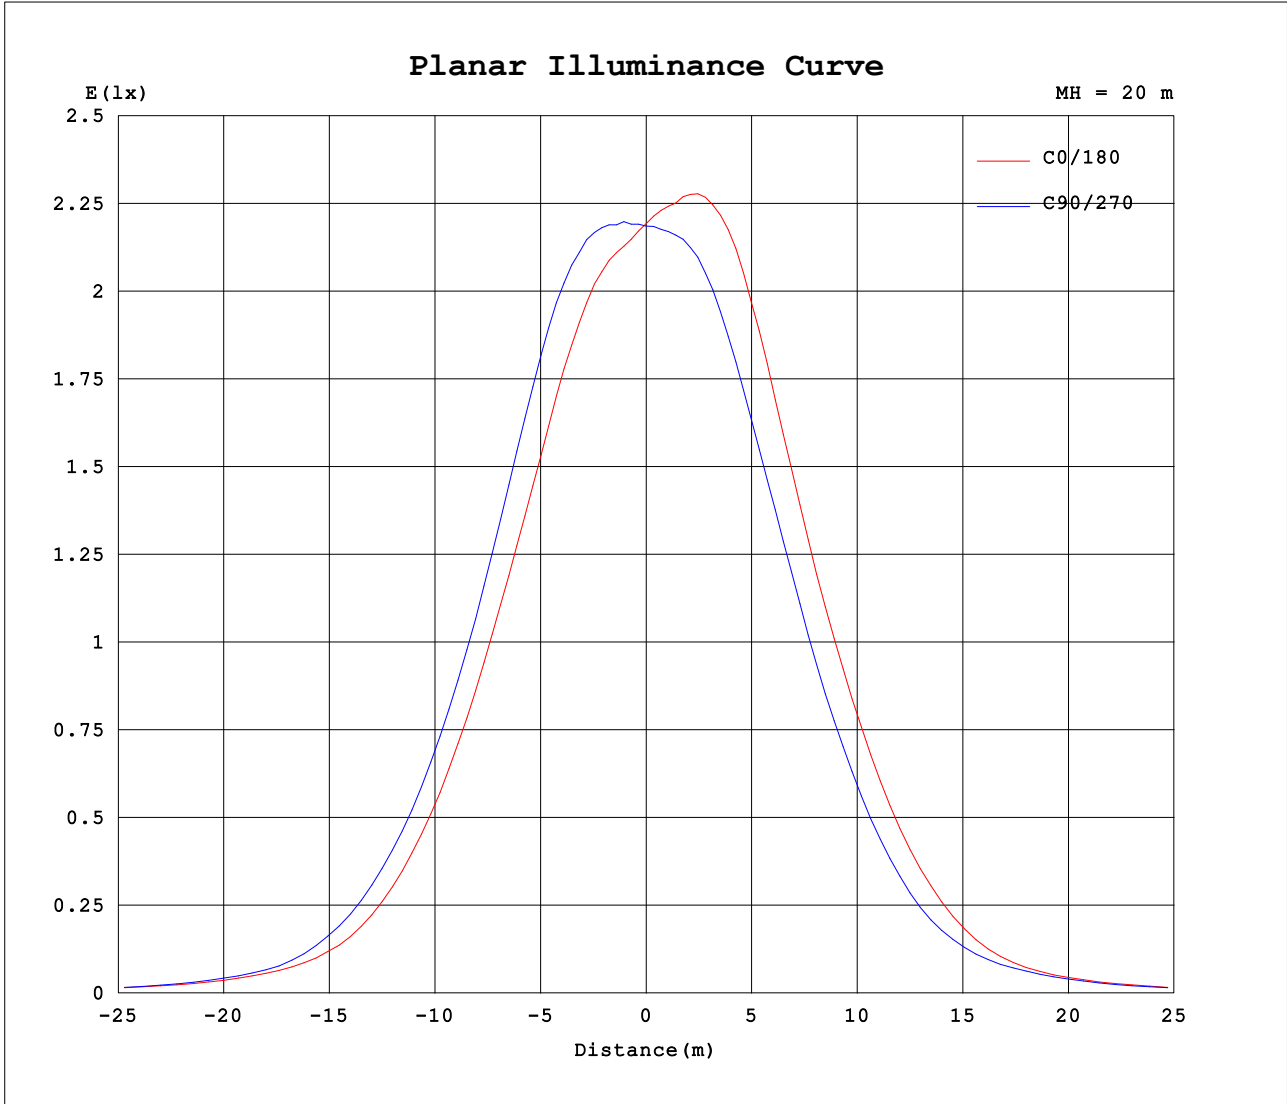

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:120.05V I:0.0824A P:9.0609W PF:0.9090 Freq:59.98Hz Lamp Flux:643.142x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	876	876	876	876	876	876	876	876	876	876	876	876	876	876	876	876			
5	844	849	859	873	888	899	910	916	917	909	899	885	871	855	847	842			
10	772	790	810	840	871	898	918	929	927	905	876	841	815	792	778	770			
15	642	661	687	728	769	807	831	837	837	803	764	720	690	664	645	638			
20	493	508	530	566	606	646	670	683	670	638	602	563	536	510	492	485			
25	344	358	377	407	436	471	496	507	496	467	436	404	378	358	348	339			
30	215	230	240	263	286	307	323	336	330	306	288	253	237	225	219	213			
35	118	126	139	150	165	179	180	192	189	181	161	138	131	126	123	118			
40	66.7	69.3	73.4	79.1	84.4	91.8	93.5	92.7	93.7	89.8	80.8	74.9	74.0	71.2	69.7	66.8			
45	42.2	43.2	44.9	46.0	48.8	52.1	52.5	52.3	50.8	49.8	48.1	44.8	46.2	44.3	43.2	42.3			
50	27.6	28.2	29.8	28.9	29.4	30.5	31.5	31.9	30.5	28.7	28.2	27.8	27.6	26.6	27.1	27.0			
55	19.2	20.0	21.1	18.6	18.2	18.7	20.8	21.4	19.7	18.3	18.3	17.9	18.1	17.8	18.5	19.0			
60	14.2	14.7	15.2	13.9	13.7	13.8	14.0	14.4	13.6	13.0	13.2	12.7	12.8	12.7	13.0	13.7			
65	10.9	11.2	12.2	11.0	10.9	10.8	11.0	11.5	11.0	10.4	10.9	10.3	10.3	10.3	10.4	10.7			
70	8.83	8.84	9.34	8.08	7.99	7.87	8.25	8.76	8.48	7.97	8.40	7.97	7.92	7.99	8.15	8.50			
75	6.43	6.30	6.15	5.40	5.28	5.17	5.43	5.97	5.95	5.55	5.74	5.59	5.55	5.65	5.83	6.14			
80	4.21	3.86	3.73	3.24	3.09	3.07	3.19	3.59	3.82	3.57	3.61	3.53	3.55	3.64	3.79	4.04			
85	0.28	1.15	0.30	0.10	0.09	0.09	0.17	0.97	0.33	1.49	0.63	0.16	0.15	0.17	0.68	1.88			
90	0.02	0.02	0.01	0.01	0.02	0.01	0.02	0.01	0.03	0.02	0.03	0.02	0.03	0.02	0.02	0.03			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: