
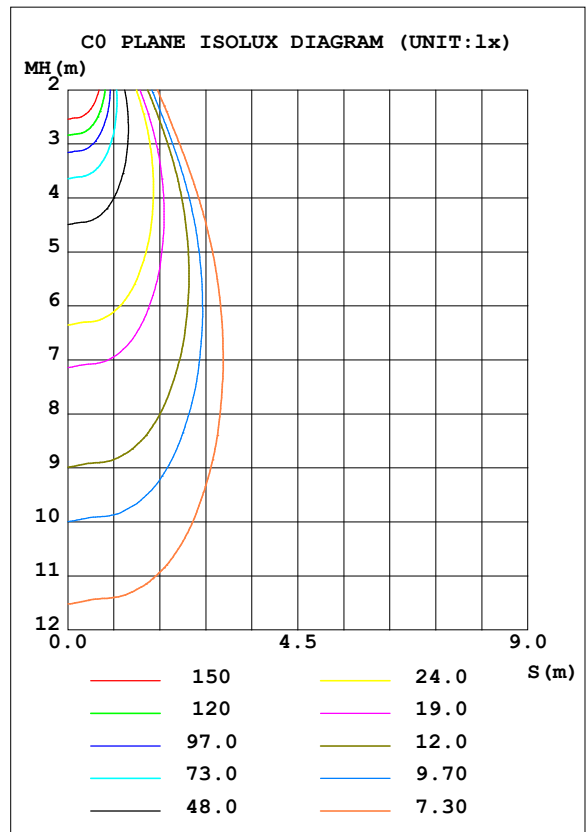


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 80.76 lm/W			
MODEL	LBL-JB10W-5CCT	Imax (cd)	1013	S/MH (C0/180)	0.79
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	0.72
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	714.08	<input type="checkbox"/> UP, DN (C0-180)	0.0, 52.4
NOMINAL FLUX (lm)	714.077	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 47.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.80

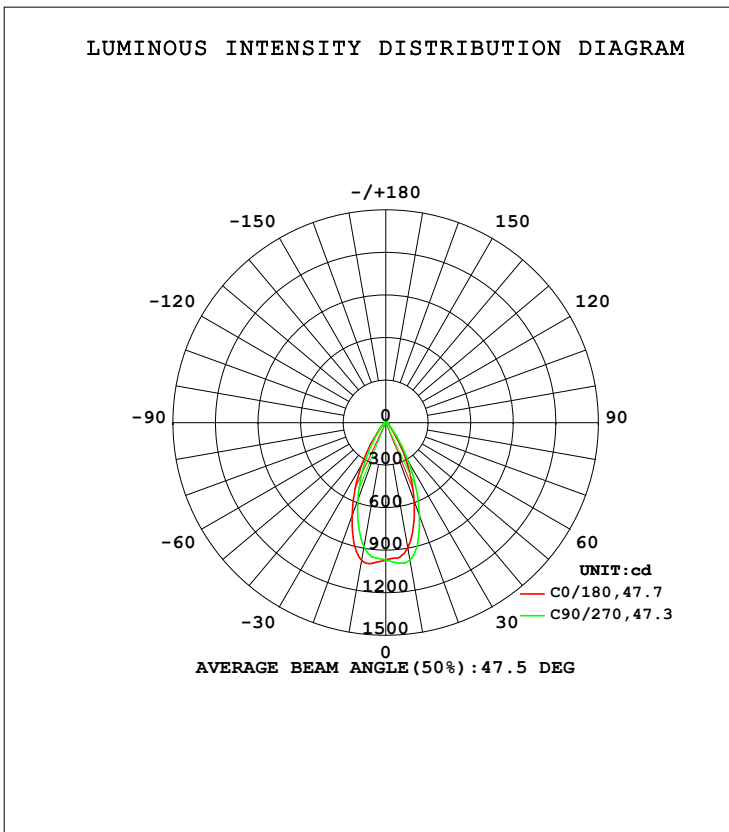

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	897.0	944.0	983.4	1005	987.1	934.4	888.1	875.7	0- 10	92.07	92.07	12.9,12.9
20	582.7	634.1	697.1	728.6	696.3	626.0	577.3	563.3	10- 20	223.5	315.6	44.2,44.2
30	263.6	295.9	328.6	354.1	334.1	290.8	259.5	244.0	20- 30	209.0	524.6	73.5,73.5
40	78.12	88.95	93.87	104.6	96.82	85.18	81.07	77.58	30- 40	107.8	632.4	88.6,88.6
50	31.14	33.78	34.17	35.15	33.25	30.91	30.36	30.07	40- 50	41.77	674.2	94.4,94.4
60	16.15	17.28	15.51	15.59	14.62	14.34	13.97	14.53	50- 60	19.69	693.9	97.2,97.2
70	9.952	10.61	9.041	9.176	9.210	9.153	8.713	9.092	60- 70	11.99	705.9	98.9,98.9
80	4.739	4.271	3.549	3.566	4.192	3.952	3.845	4.218	70- 80	6.869	712.7	99.8,99.8
90	0.0217	0.0164	0.0187	0.0153	0.0324	0.0297	0.0277	0.0277	80- 90	1.343	714.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

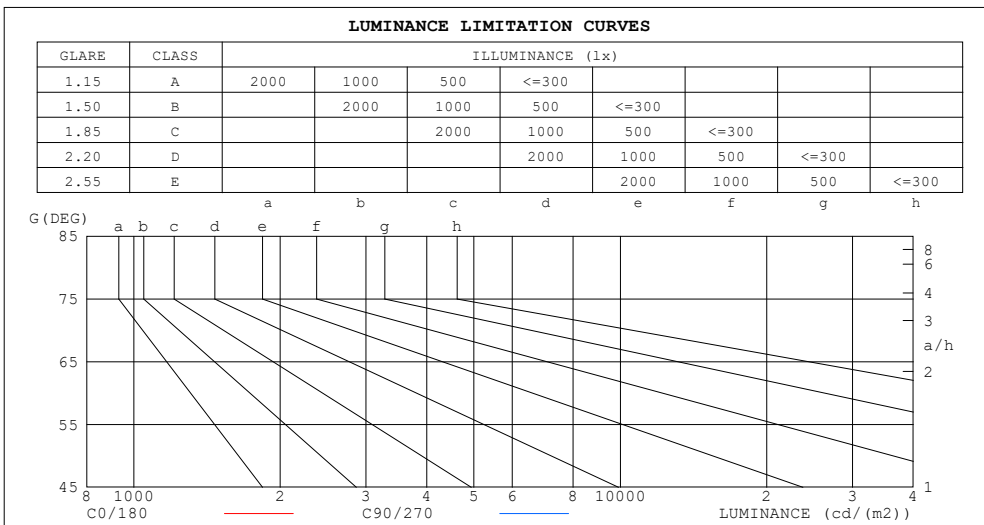

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	38	12
80	245	184
75	252	208
70	262	238
65	264	261
60	290	279
55	341	342
50	436	478
45	608	704


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.03	.98	.95	1.01	.97	.94	.98	.94	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.87	.94	.90	.86	.92	.88	.84	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.78	.73	.81	.76	.73	.80	.75	.72	.78	.74	.72	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.64	.74	.68	.64	.73	.68	.64	.71	.67	.64	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.64	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.58
9.0	.67	.61	.57	.66	.61	.57	.66	.60	.57	.65	.60	.57	.64	.60	.57	.55
10.0	.64	.58	.54	.63	.58	.54	.62	.57	.54	.62	.57	.54	.61	.57	.54	.52

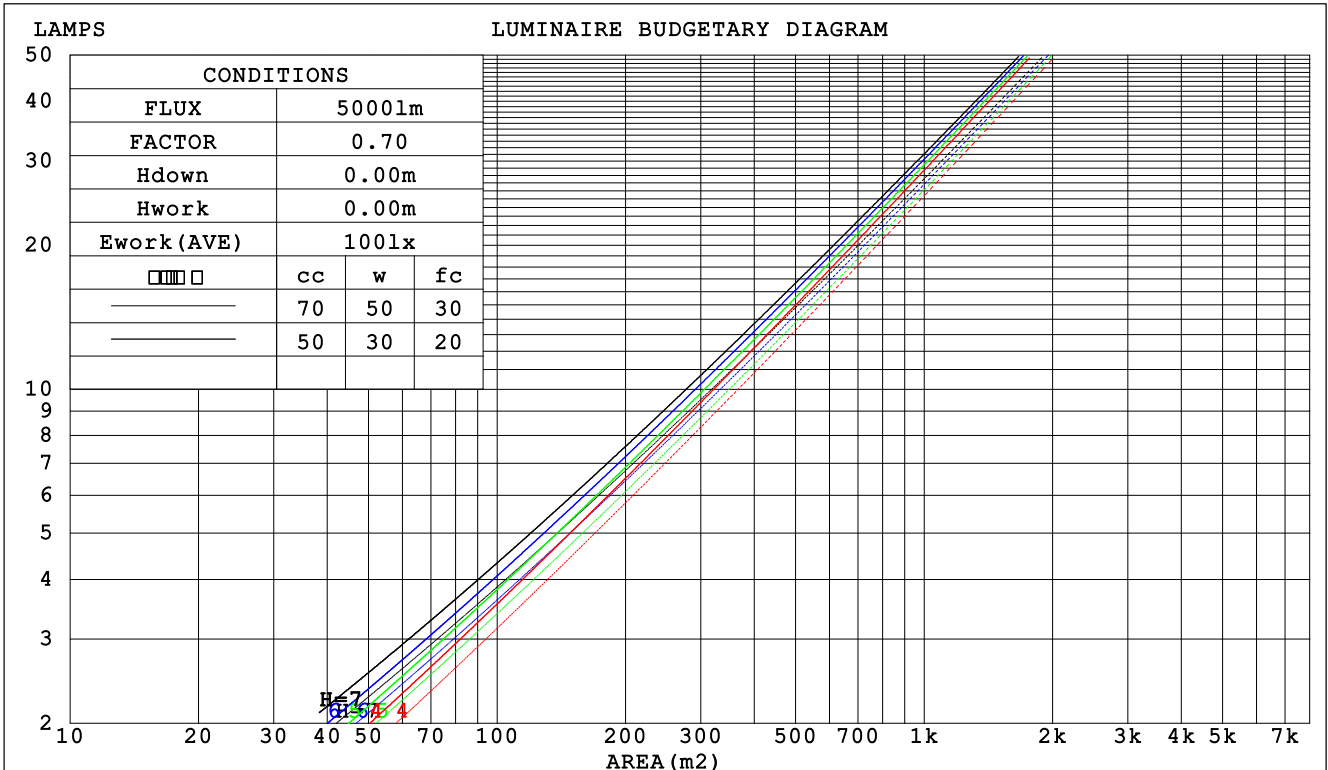

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.184 .105 .033	.178 .101 .032	.165 .095 .030	.153 .088 .028	.143 .083 .027	
2.0	.175 .096 .029	.170 .093 .029	.159 .088 .027	.149 .084 .026	.140 .079 .025	
3.0	.166 .088 .026	.161 .086 .026	.152 .082 .025	.143 .079 .024	.136 .075 .023	
4.0	.157 .081 .024	.153 .080 .024	.145 .077 .023	.137 .074 .022	.131 .071 .022	
5.0	.148 .076 .022	.145 .074 .022	.138 .072 .021	.132 .069 .021	.126 .067 .020	
6.0	.141 .071 .020	.138 .070 .020	.132 .068 .020	.126 .066 .019	.121 .064 .019	
7.0	.134 .066 .019	.131 .065 .019	.126 .064 .018	.121 .062 .018	.116 .060 .018	
8.0	.128 .062 .018	.125 .062 .017	.121 .060 .017	.116 .059 .017	.112 .058 .017	
9.0	.122 .059 .016	.120 .058 .016	.116 .057 .016	.112 .056 .016	.108 .055 .016	
10.0	.117 .056 .016	.115 .055 .015	.111 .054 .015	.107 .053 .015	.104 .052 .015	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.172 .157 .144	.147 .135 .124	.100 .093 .086	.058 .054 .050	.019 .017 .016	
2.0	.157 .132 .112	.134 .114 .097	.092 .079 .068	.053 .046 .040	.017 .015 .013	
3.0	.144 .114 .089	.124 .098 .077	.085 .068 .054	.049 .040 .032	.016 .013 .010	
4.0	.134 .099 .072	.115 .085 .063	.079 .060 .044	.046 .035 .026	.015 .011 .009	
5.0	.125 .087 .059	.108 .076 .052	.074 .053 .036	.043 .031 .022	.014 .010 .007	
6.0	.118 .078 .050	.101 .068 .043	.070 .047 .031	.040 .028 .018	.013 .009 .006	
7.0	.111 .070 .042	.095 .061 .037	.066 .043 .026	.038 .025 .015	.012 .008 .005	
8.0	.105 .064 .036	.090 .056 .031	.063 .039 .022	.036 .023 .013	.012 .008 .004	
9.0	.100 .059 .031	.086 .051 .027	.060 .036 .019	.035 .021 .012	.011 .007 .004	
10.0	.095 .055 .027	.082 .047 .024	.057 .033 .017	.033 .020 .010	.011 .006 .003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm										
NAME: LBL-JB10W-5CCT					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.3	8.2	7.5	8.4	8.6	7.8	8.7	8.0	8.9	9.1
3H	7.7	8.6	8.0	8.8	9.0	8.1	9.0	8.3	9.2	9.4
4H	8.0	8.8	8.3	9.0	9.3	8.2	9.1	8.5	9.3	9.5
6H	8.2	9.0	8.5	9.2	9.5	8.3	9.1	8.6	9.3	9.6
8H	8.2	9.0	8.5	9.2	9.5	8.3	9.1	8.6	9.3	9.6
12H	8.2	8.9	8.5	9.2	9.5	8.3	9.0	8.6	9.3	9.6
4H 2H	7.4	8.2	7.7	8.4	8.7	7.8	8.7	8.1	8.9	9.1
3H	8.0	8.8	8.4	9.0	9.3	8.3	9.0	8.6	9.3	9.6
4H	8.4	9.1	8.8	9.4	9.7	8.5	9.2	8.9	9.5	9.8
6H	8.8	9.3	9.1	9.7	10.0	8.7	9.3	9.1	9.6	10.0
8H	8.8	9.3	9.2	9.7	10.0	8.8	9.3	9.1	9.6	10.0
12H	8.8	9.2	9.2	9.6	10.0	8.7	9.2	9.1	9.6	10.0
8H 4H	8.5	9.0	8.9	9.4	9.7	8.6	9.1	9.0	9.5	9.9
6H	8.9	9.4	9.4	9.8	10.2	8.9	9.3	9.3	9.7	10.1
8H	9.0	9.4	9.5	9.9	10.3	8.9	9.3	9.4	9.8	10.2
12H	9.0	9.4	9.5	9.8	10.3	8.9	9.2	9.4	9.7	10.1
12H 4H	8.5	9.0	8.9	9.3	9.7	8.6	9.1	9.0	9.5	9.8
6H	8.9	9.3	9.4	9.8	10.2	8.9	9.3	9.3	9.7	10.1
8H	9.1	9.4	9.5	9.8	10.3	9.0	9.3	9.4	9.7	10.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.9 / - 1.2					+ 1.6 / - 1.6				
1.5H	+ 1.6 / - 1.0					+ 2.8 / - 1.4				
2.0H	+ 1.3 / - 0.7					+ 2.0 / - 1.0				

CIE Pub.117, 714.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	84	78	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	82	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	96	92	100	95	91	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	102	98	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

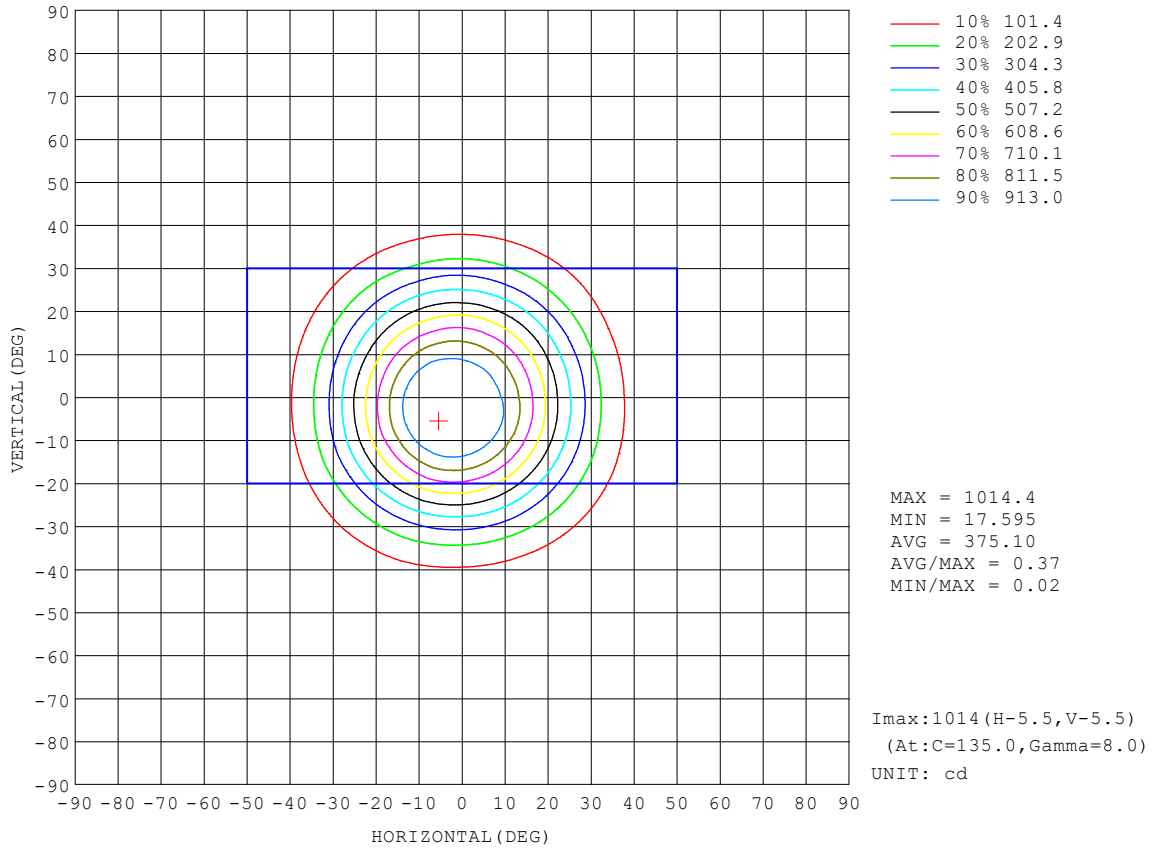


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

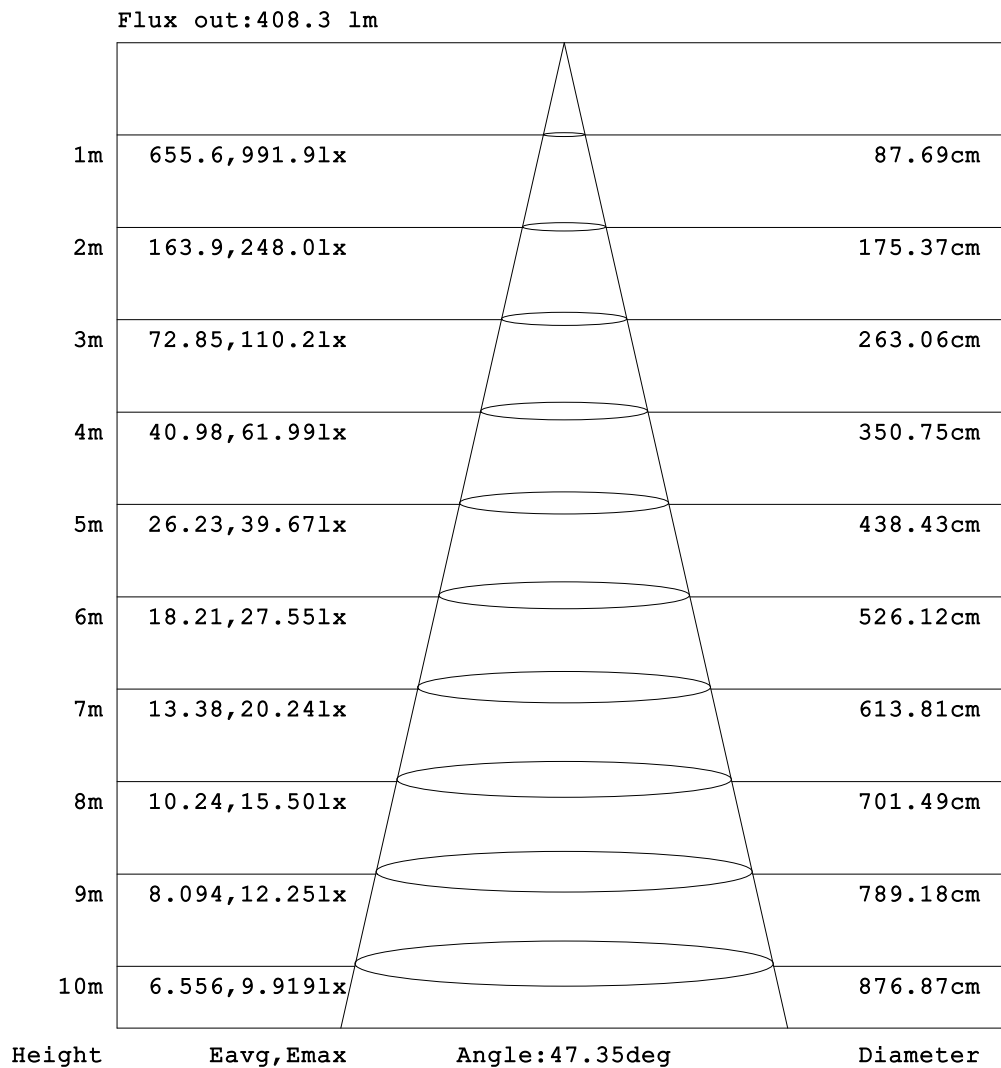


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

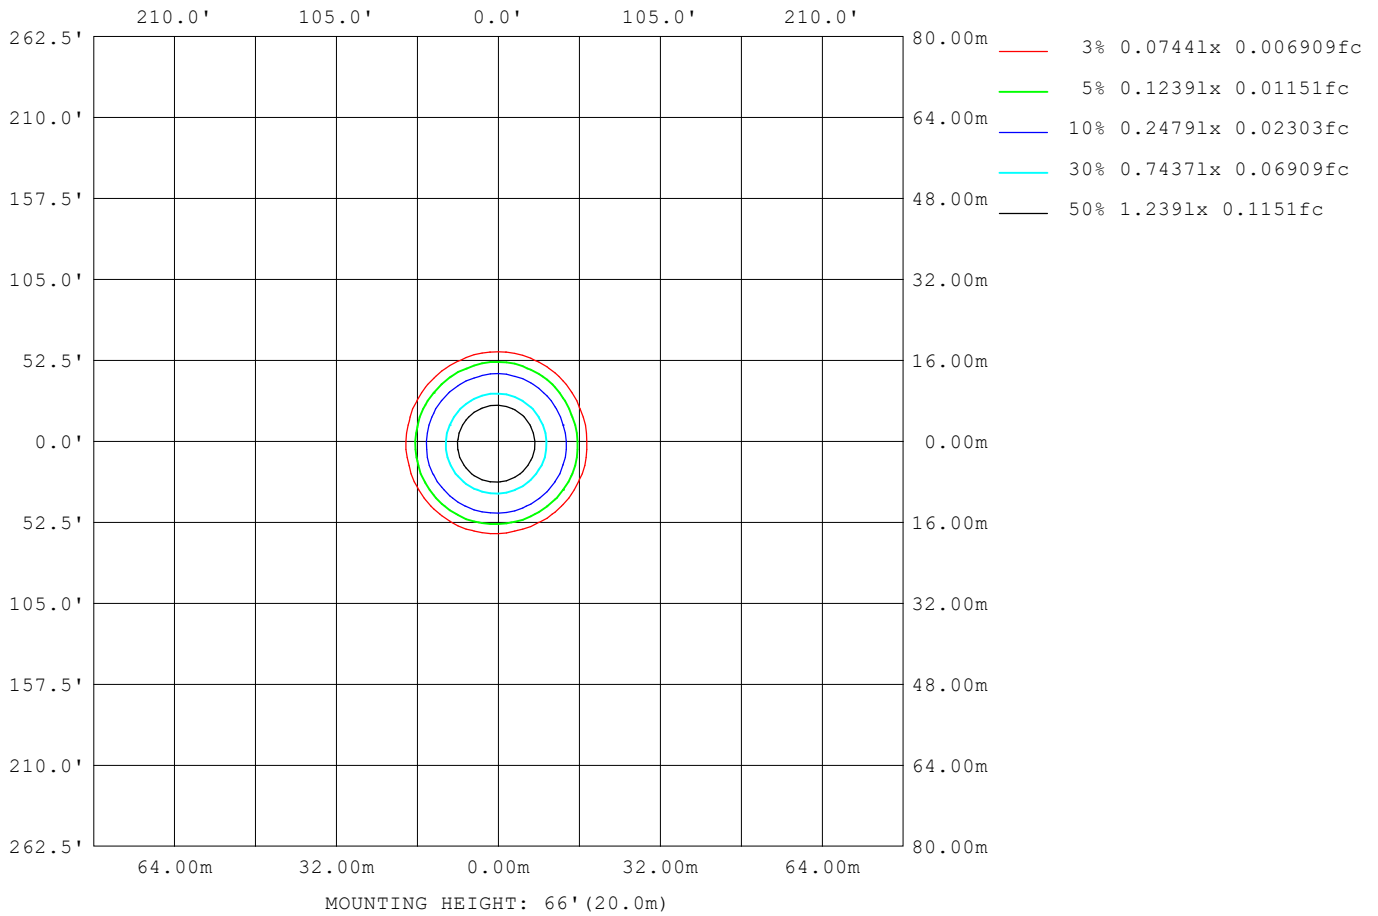

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	259
L_0~180 (75) av	239
L_0~180 (85) av	41
L_90~270 (65) av	251
L_90~270 (75) av	210
L_90~270 (85) av	13
L_45 (65) av	264
L_45 (75) av	225
L_45 (85) av	40

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

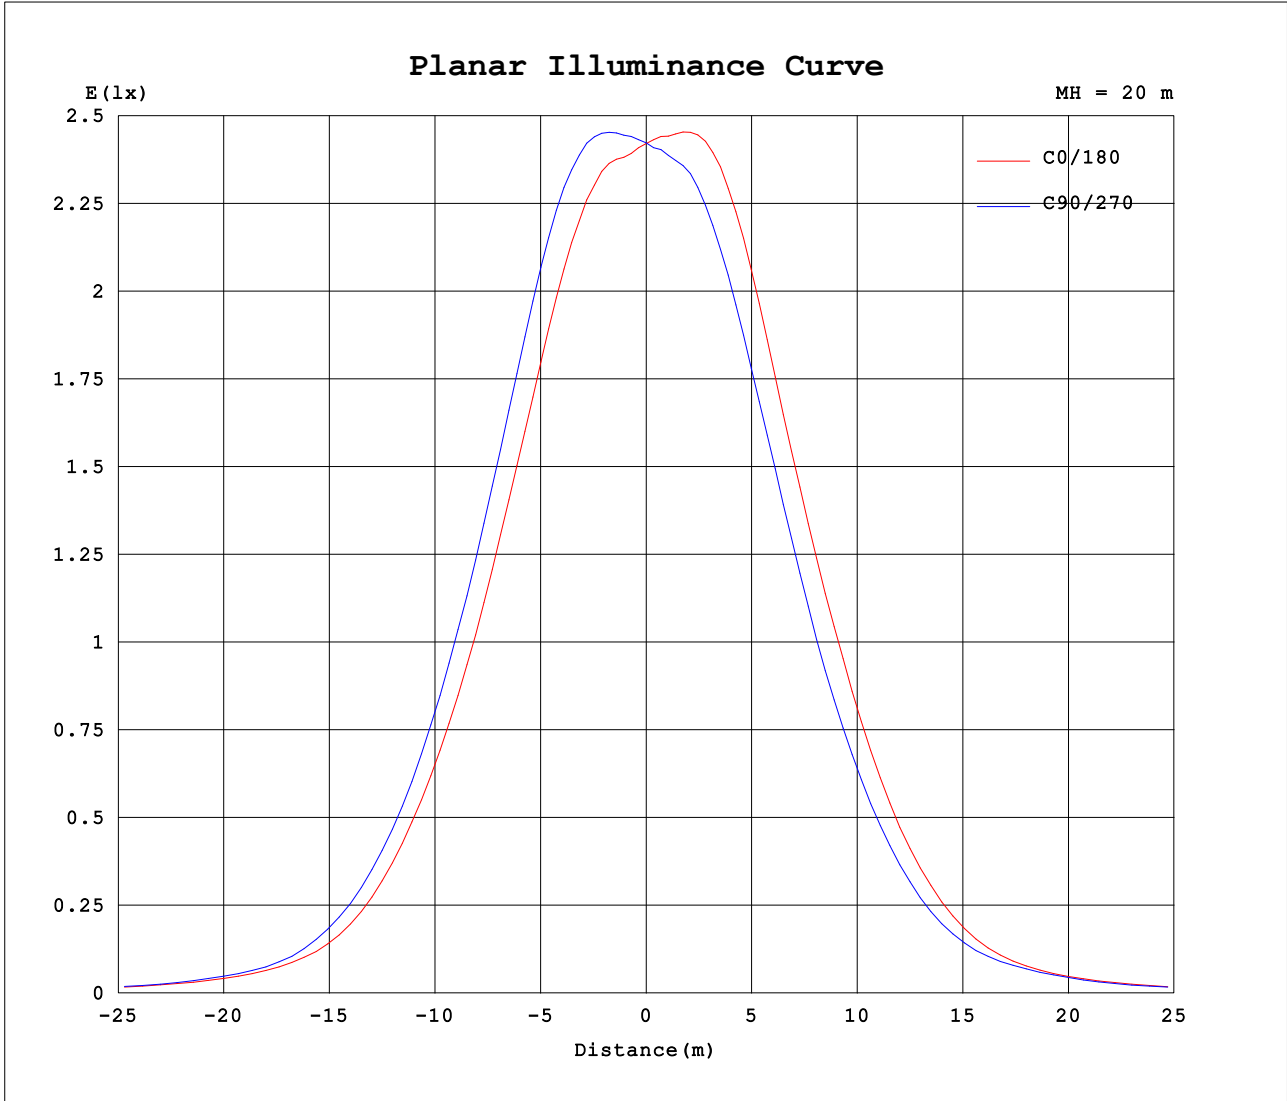

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2022-6-10

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.06V I:0.0807A P:8.8424W PF:0.9081 Freq:59.98Hz Lamp Flux:714.077x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	970	970	970	970	970	970	970	970	970	970	970	970	970	970	970	970			
5	958	965	975	986	993	998	999	998	994	986	976	962	955	948	946	949			
10	897	922	944	965	983	1000	1005	1002	987	962	934	907	888	878	876	879			
15	755	786	813	846	876	900	905	896	873	835	802	766	749	736	734	738			
20	583	610	634	664	697	725	729	724	696	660	626	593	577	566	563	566			
25	414	436	456	482	506	530	539	535	513	476	450	424	406	397	396	396			
30	264	281	296	313	329	346	354	355	334	310	291	267	259	248	244	249			
35	144	161	170	176	186	202	203	207	190	178	163	147	145	139	135	134			
40	78.1	84.6	88.9	89.9	93.9	104	105	103	96.8	91.8	85.2	81.8	81.1	79.0	77.6	74.6			
45	47.8	49.7	51.5	52.0	55.4	58.7	58.4	57.7	54.5	53.2	51.8	49.0	50.8	48.9	47.8	47.3			
50	31.1	32.1	33.8	33.0	34.2	34.8	35.2	35.3	33.2	31.3	30.9	30.5	30.4	29.6	30.1	30.2			
55	21.8	22.7	24.0	21.5	21.8	21.7	23.2	23.4	21.3	19.7	19.7	19.5	20.0	19.8	20.5	21.3			
60	16.2	16.9	17.3	15.8	15.5	15.5	15.6	15.7	14.6	14.0	14.3	13.8	14.0	14.1	14.5	15.4			
65	12.4	12.9	13.9	12.5	12.3	12.1	12.2	12.5	11.9	11.3	11.9	11.2	11.3	11.3	11.6	12.0			
70	9.95	10.1	10.6	9.21	9.04	8.83	9.18	9.61	9.21	8.72	9.15	8.72	8.71	8.83	9.09	9.54			
75	7.25	7.21	7.02	6.15	5.98	5.79	6.05	6.60	6.51	6.10	6.30	6.13	6.12	6.26	6.49	6.89			
80	4.74	4.44	4.27	3.74	3.55	3.45	3.57	3.95	4.19	3.92	3.95	3.85	3.85	3.97	4.22	4.54			
85	0.37	1.34	0.37	0.14	0.12	0.11	0.20	1.04	0.41	1.55	0.48	0.14	0.13	0.15	0.48	2.03			
90	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2022-6-10

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: