
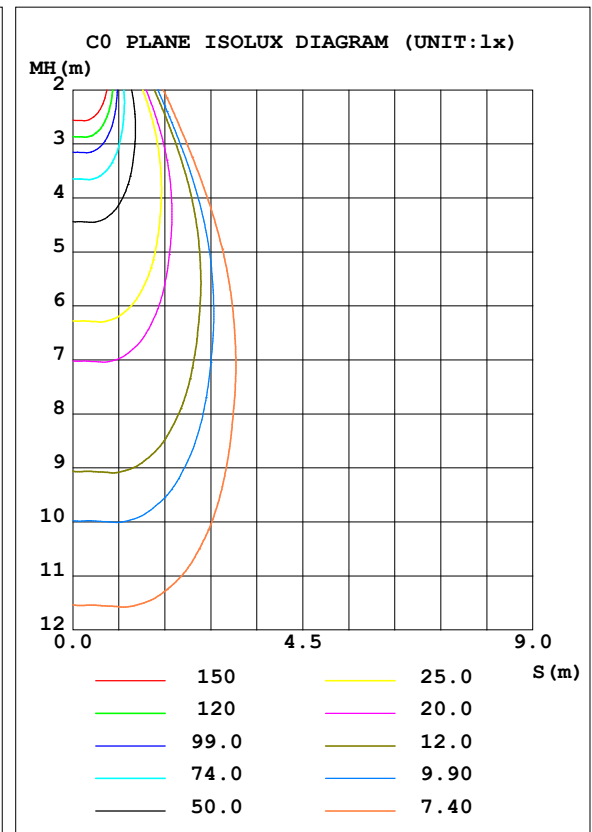


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.55 lm/W			
MODEL	5寸圆形面板灯 COB	Imax (cd)	1037	S/MH (C0/180)	0.76
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	0.71
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	727.08	<input type="checkbox"/> UP, DN (C0-180)	0.0, 53.9
NOMINAL FLUX (lm)	727.083	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 46.1
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.75

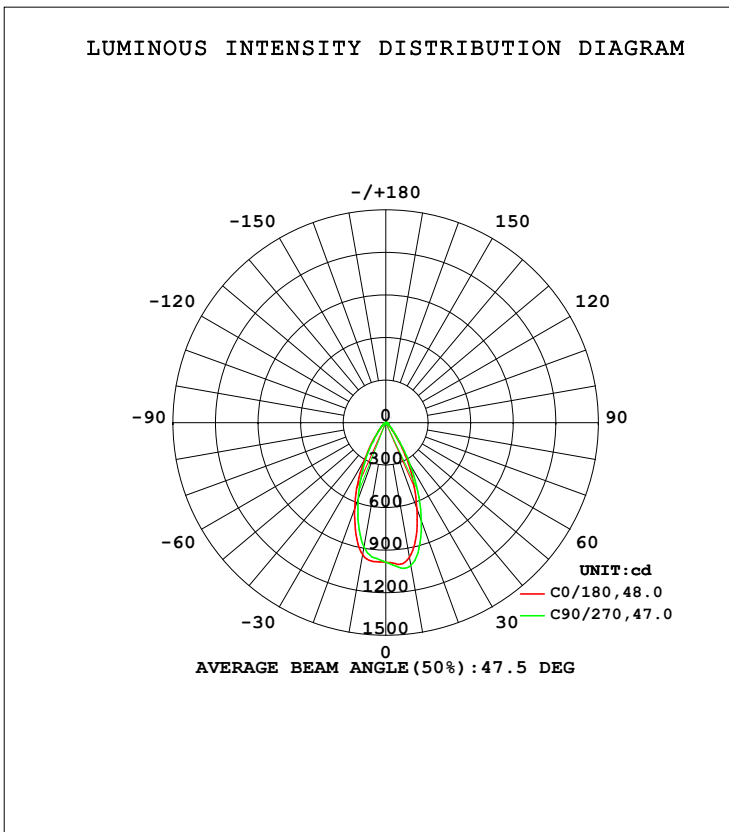

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	963.9	1016	1022	1000	945.1	902.8	888.7	912.0	0- 10	93.71	93.71	12.9,12.9
20	641.8	701.3	734.7	716.2	645.5	587.8	572.4	604.2	10- 20	227.7	321.4	44.2,44.2
30	302.4	338.2	346.5	350.2	297.8	260.8	262.0	254.6	20- 30	213.0	534.4	73.5,73.5
40	84.94	98.53	96.08	107.3	88.23	81.19	82.00	80.49	30- 40	109.7	644.1	88.6,88.6
50	32.36	35.10	34.28	35.49	33.02	31.07	30.99	31.06	40- 50	42.54	686.6	94.4,94.4
60	16.91	18.14	15.70	15.43	14.41	14.14	14.07	14.98	50- 60	19.96	706.6	97.2,97.2
70	10.38	10.93	9.120	9.075	9.193	9.174	8.815	9.347	60- 70	12.17	718.7	98.9,98.9
80	4.923	4.432	3.583	3.529	4.189	3.976	3.939	4.345	70- 80	6.971	725.7	99.8,99.8
90	0.0250	0.0167	0.0177	0.0187	0.0307	0.0334	0.0297	0.0280	80- 90	1.370	727.1	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

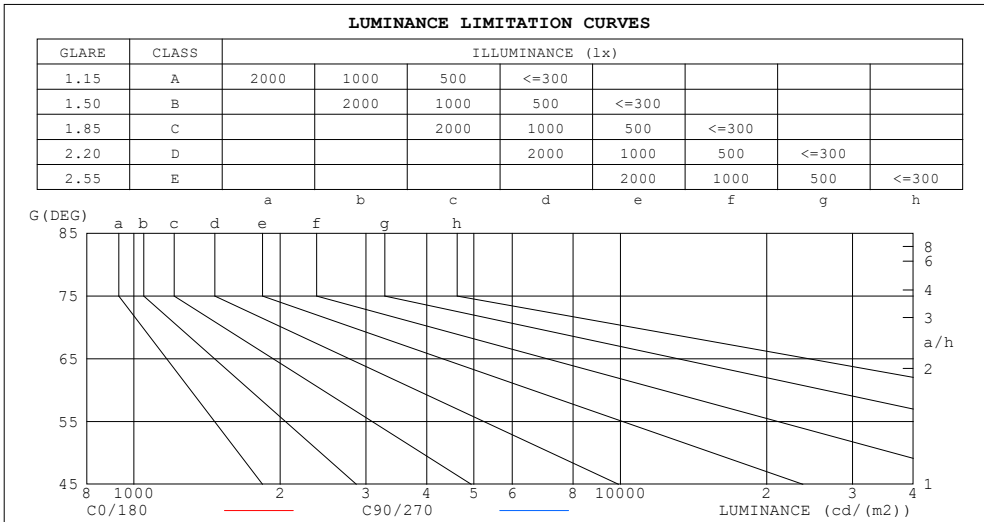

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	38	11
80	255	186
75	261	209
70	273	240
65	279	264
60	304	283
55	358	337
50	453	480
45	639	718


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.03	.98	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.87	.94	.90	.86	.92	.88	.84	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.76	.73	.80	.75	.72	.78	.74	.72	.70
6.0	.79	.73	.69	.78	.73	.69	.77	.72	.68	.75	.71	.68	.74	.70	.67	.66
7.0	.75	.69	.65	.74	.68	.64	.73	.68	.64	.71	.67	.64	.70	.66	.63	.62
8.0	.71	.65	.61	.70	.64	.61	.69	.64	.60	.68	.63	.60	.67	.63	.60	.58
9.0	.67	.61	.57	.66	.61	.57	.66	.60	.57	.65	.60	.57	.64	.60	.57	.55
10.0	.64	.58	.54	.63	.58	.54	.62	.57	.54	.62	.57	.54	.61	.57	.54	.52

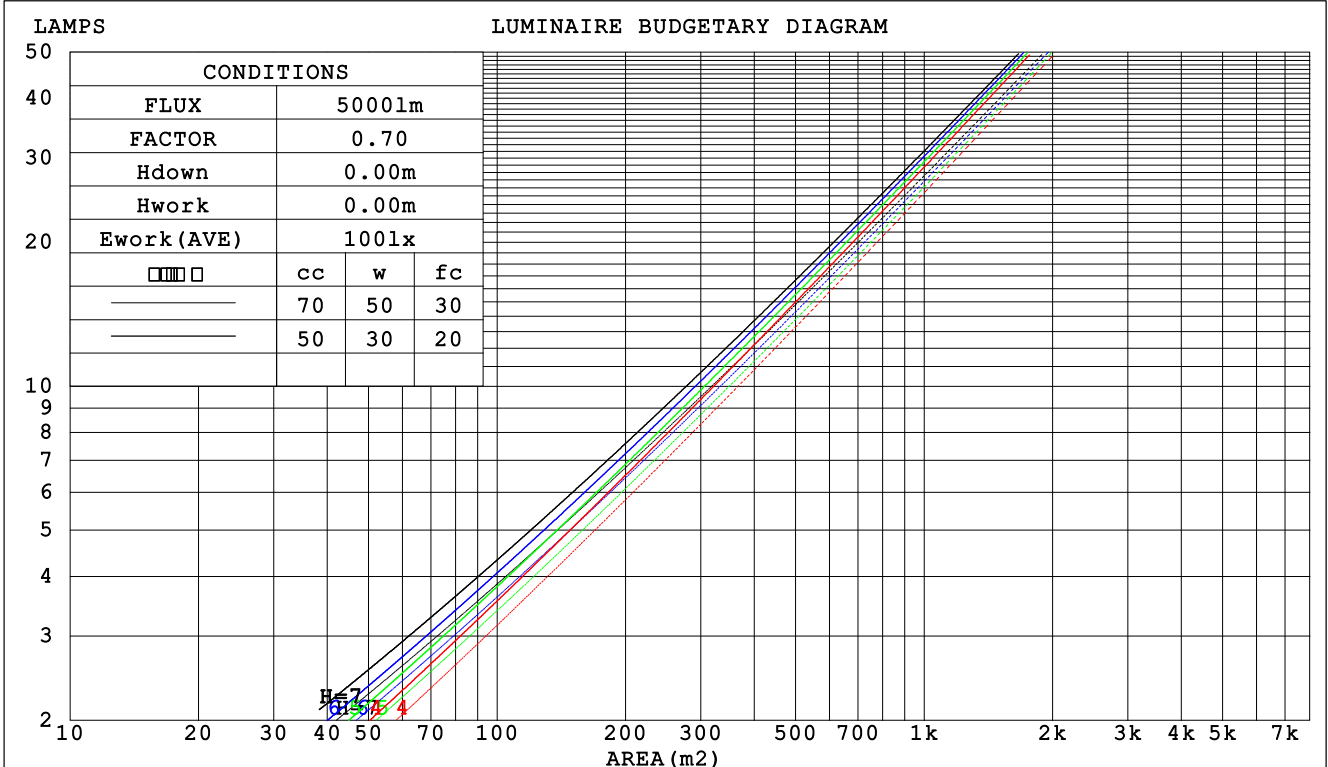

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.184 .105 .033	.178 .101 .032	.165 .095 .030	.153 .088 .028	.143 .083 .027	
2.0	.175 .096 .029	.170 .093 .029	.159 .088 .027	.149 .084 .026	.140 .079 .025	
3.0	.166 .088 .026	.161 .086 .026	.152 .082 .025	.143 .079 .024	.136 .075 .023	
4.0	.157 .081 .024	.153 .080 .024	.145 .077 .023	.137 .074 .022	.131 .071 .022	
5.0	.148 .076 .022	.145 .074 .022	.138 .072 .021	.132 .069 .021	.126 .067 .020	
6.0	.141 .071 .020	.138 .070 .020	.132 .068 .020	.126 .066 .019	.121 .064 .019	
7.0	.134 .066 .019	.131 .065 .019	.126 .064 .018	.121 .062 .018	.116 .060 .018	
8.0	.128 .062 .018	.125 .062 .017	.121 .060 .017	.116 .059 .017	.112 .057 .017	
9.0	.122 .059 .016	.120 .058 .016	.116 .057 .016	.112 .056 .016	.108 .055 .016	
10.0	.117 .056 .016	.115 .055 .015	.111 .054 .015	.107 .053 .015	.104 .052 .015	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.172 .157 .144	.147 .135 .124	.100 .093 .086	.058 .054 .050	.019 .017 .016	
2.0	.157 .132 .112	.134 .114 .097	.092 .079 .068	.053 .046 .040	.017 .015 .013	
3.0	.144 .114 .089	.124 .098 .077	.085 .068 .054	.049 .040 .032	.016 .013 .010	
4.0	.134 .099 .072	.115 .085 .063	.079 .060 .044	.046 .035 .026	.015 .011 .009	
5.0	.125 .087 .059	.108 .076 .052	.074 .053 .036	.043 .031 .022	.014 .010 .007	
6.0	.118 .078 .050	.101 .068 .043	.070 .047 .031	.040 .028 .018	.013 .009 .006	
7.0	.111 .070 .042	.095 .061 .037	.066 .043 .026	.038 .025 .015	.012 .008 .005	
8.0	.105 .064 .036	.090 .056 .031	.063 .039 .022	.036 .023 .013	.012 .008 .004	
9.0	.100 .059 .031	.086 .051 .027	.060 .036 .019	.035 .021 .012	.011 .007 .004	
10.0	.095 .055 .027	.082 .047 .024	.057 .033 .017	.033 .020 .010	.011 .006 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm										
NAME: LBL-JB10W-5CCT					TYPE:			WEIGHT:		
SPEC.:5000K 90					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.8	8.8	8.0	8.9	9.1	8.0	8.9	8.2	9.1	9.3
3H	8.2	9.1	8.5	9.3	9.5	8.3	9.2	8.5	9.4	9.6
4H	8.4	9.3	8.7	9.5	9.7	8.4	9.2	8.7	9.4	9.7
6H	8.6	9.4	8.9	9.7	9.9	8.5	9.3	8.8	9.5	9.8
8H	8.6	9.4	9.0	9.7	9.9	8.5	9.2	8.8	9.5	9.8
12H	8.6	9.3	8.9	9.6	9.9	8.4	9.2	8.8	9.4	9.7
4H 2H	7.9	8.7	8.2	8.9	9.2	8.0	8.9	8.3	9.1	9.3
3H	8.5	9.2	8.8	9.5	9.7	8.5	9.2	8.8	9.5	9.8
4H	8.8	9.5	9.2	9.8	10.1	8.7	9.3	9.0	9.6	10.0
6H	9.1	9.7	9.5	10.0	10.4	8.9	9.4	9.2	9.8	10.1
8H	9.2	9.7	9.5	10.0	10.4	8.9	9.4	9.3	9.8	10.2
12H	9.1	9.6	9.5	10.0	10.4	8.9	9.3	9.3	9.7	10.1
8H 4H	8.9	9.4	9.3	9.8	10.1	8.8	9.3	9.2	9.7	10.0
6H	9.3	9.7	9.7	10.1	10.5	9.0	9.5	9.5	9.9	10.3
8H	9.4	9.8	9.8	10.2	10.6	9.1	9.5	9.5	9.9	10.3
12H	9.4	9.7	9.8	10.2	10.6	9.0	9.4	9.5	9.8	10.3
12H 4H	8.8	9.3	9.3	9.7	10.1	8.7	9.2	9.2	9.6	10.0
6H	9.3	9.7	9.7	10.1	10.5	9.0	9.4	9.5	9.8	10.3
8H	9.4	9.7	9.9	10.2	10.7	9.1	9.4	9.6	9.9	10.4
Variations with the observer position at spacings:										
S = 1.0H	+ 1.1 / - 1.3					+ 1.5 / - 1.7				
1.5H	+ 2.0 / - 1.1					+ 2.7 / - 1.4				
2.0H	+ 1.3 / - 0.7					+ 2.0 / - 1.0				

CIE Pub.117, 727.1 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.1)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	84	78	73	84	77	73	83	77	73	69
0.80	92	86	82	91	85	82	90	85	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	96	92	100	95	91	98	94	91	86
1.50	104	99	95	103	98	95	101	97	94	89
2.00	107	103	99	106	102	98	103	100	97	92
2.50	109	105	102	108	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

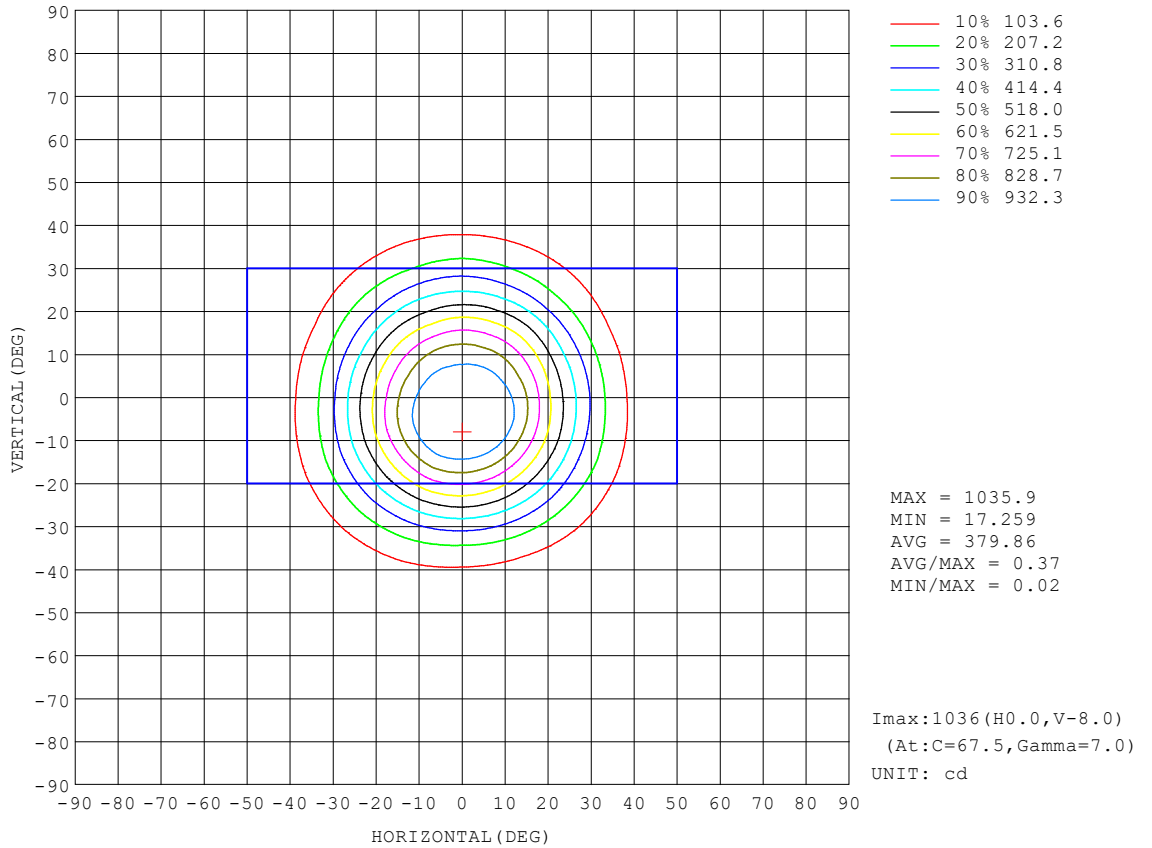


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

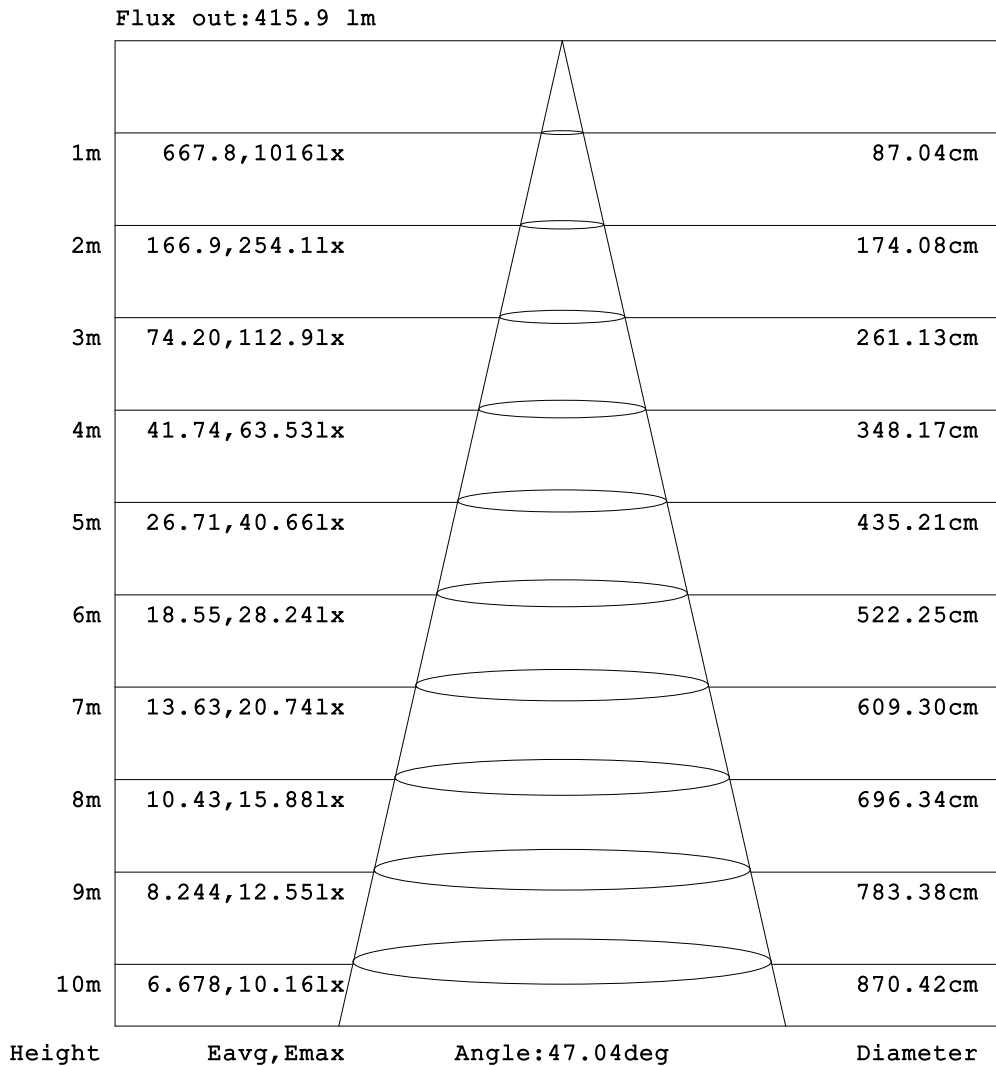


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

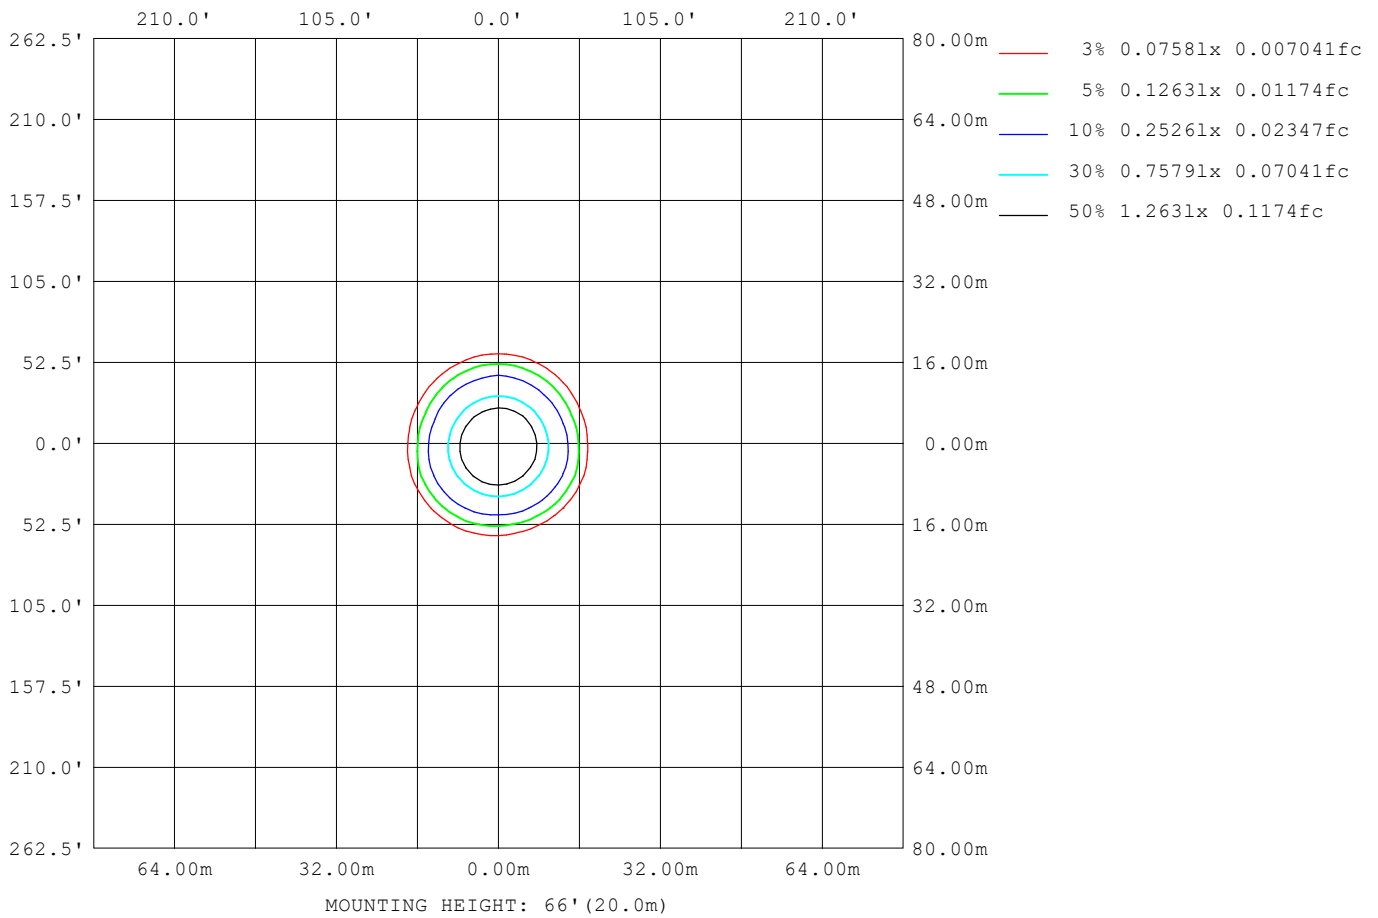

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	265
L_0~180 (75) av	244
L_0~180 (85) av	41
L_90~270 (65) av	253
L_90~270 (75) av	213
L_90~270 (85) av	13
L_45 (65) av	268
L_45 (75) av	228
L_45 (85) av	43

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

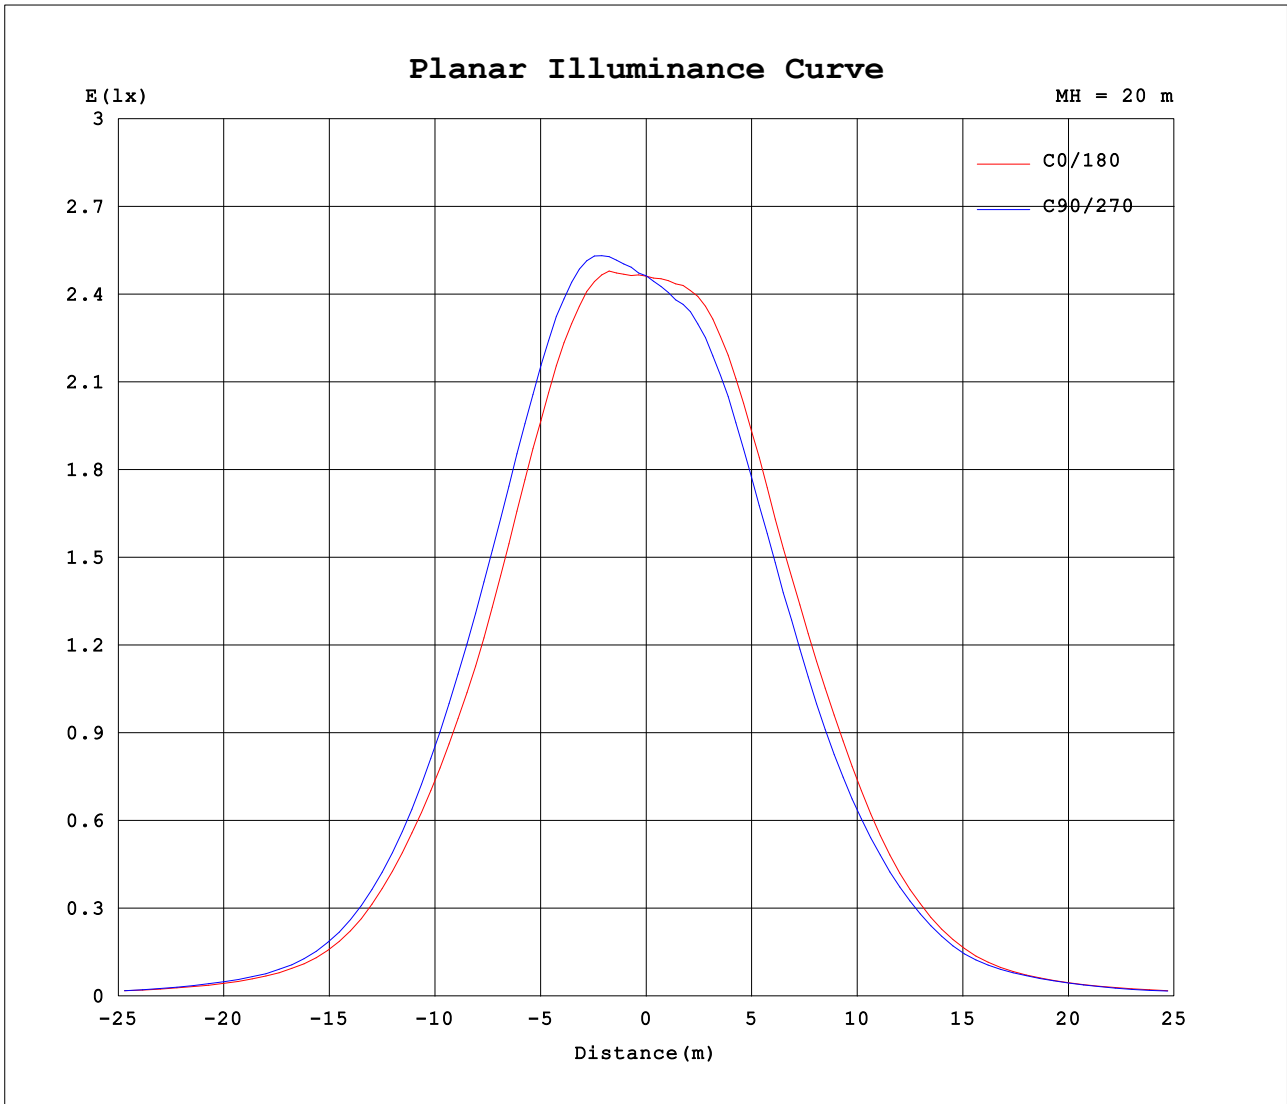

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2022-6-10

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.05V I:0.0830A P:9.1401W PF:0.9093 Freq:59.98Hz Lamp Flux:727.083x1 lm		
NAME: LBL-JB10W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	985	985	985	985	985	985	985	985	985	985	985	985	985	985	985	985			
5	1004	1011	1017	1025	1023	1016	1005	991	984	973	964	960	957	964	974	985			
10	964	998	1016	1022	1022	1018	1000	977	945	918	903	896	889	895	912	931			
15	831	867	891	908	913	918	900	864	818	779	760	745	745	752	773	793			
20	642	677	701	724	735	739	716	688	645	608	588	566	572	580	604	618			
25	464	494	511	530	538	541	528	504	469	431	415	407	402	407	423	433			
30	302	320	338	344	347	354	350	334	298	276	261	257	262	254	255	274			
35	163	191	191	192	190	206	208	196	167	147	150	145	149	144	140	143			
40	84.9	95.5	98.5	93.4	96.1	106	107	103	88.2	81.7	81.2	82.8	82.0	81.2	80.5	77.7			
45	50.2	53.1	54.3	53.7	56.4	59.8	59.4	57.7	52.9	50.9	51.1	49.6	51.6	50.4	49.5	49.0			
50	32.4	33.6	35.1	34.0	34.3	34.7	35.5	35.5	33.0	31.0	31.1	30.9	31.0	30.3	31.1	31.2			
55	22.8	23.8	25.0	22.2	21.5	21.3	23.2	23.2	20.9	19.4	19.6	19.6	20.2	20.2	21.2	22.0			
60	16.9	17.7	18.1	16.3	15.7	15.6	15.4	15.5	14.4	13.8	14.1	13.9	14.1	14.4	15.0	15.9			
65	13.1	13.5	14.5	12.8	12.4	12.1	12.1	12.2	11.8	11.2	11.8	11.3	11.4	11.5	11.9	12.4			
70	10.4	10.5	10.9	9.41	9.12	8.83	9.07	9.46	9.19	8.69	9.17	8.81	8.82	9.01	9.35	9.87			
75	7.52	7.41	7.22	6.28	6.01	5.80	6.00	6.53	6.51	6.12	6.33	6.23	6.22	6.38	6.67	7.07			
80	4.92	4.58	4.43	3.84	3.58	3.46	3.53	3.92	4.19	3.94	3.98	3.91	3.94	4.08	4.35	4.65			
85	0.37	1.39	0.36	0.13	0.11	0.10	0.19	1.02	0.42	1.54	0.52	0.15	0.14	0.17	0.58	2.14			
90	0.03	0.02	0.02	0.02	0.02	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2022-6-10

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: