
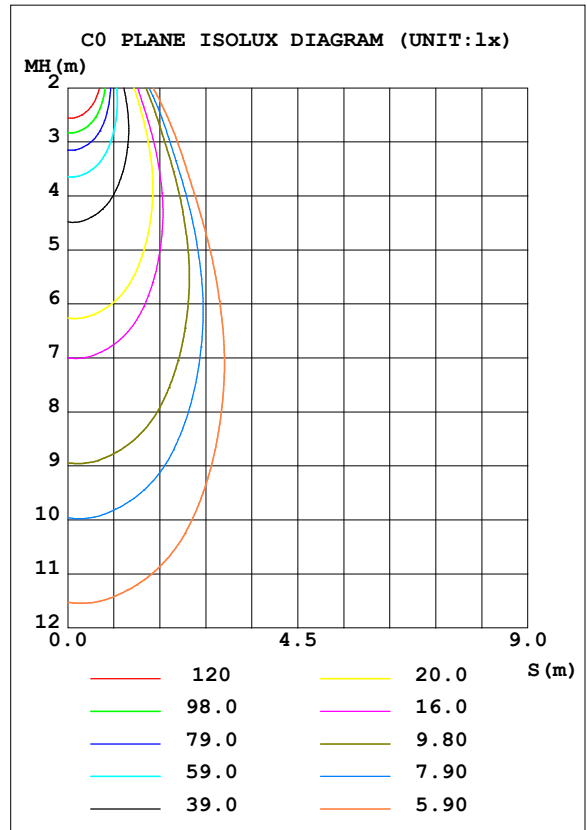


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 69.40 lm/W			
MODEL	LED-1-S7W-5CCT	I <sub>max</sub> (cd)	787.2	S/MH (C0/180)	0.67
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	0.73
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	483.49	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.2
NOMINAL FLUX (lm)	483.494	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.8
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	12	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.75

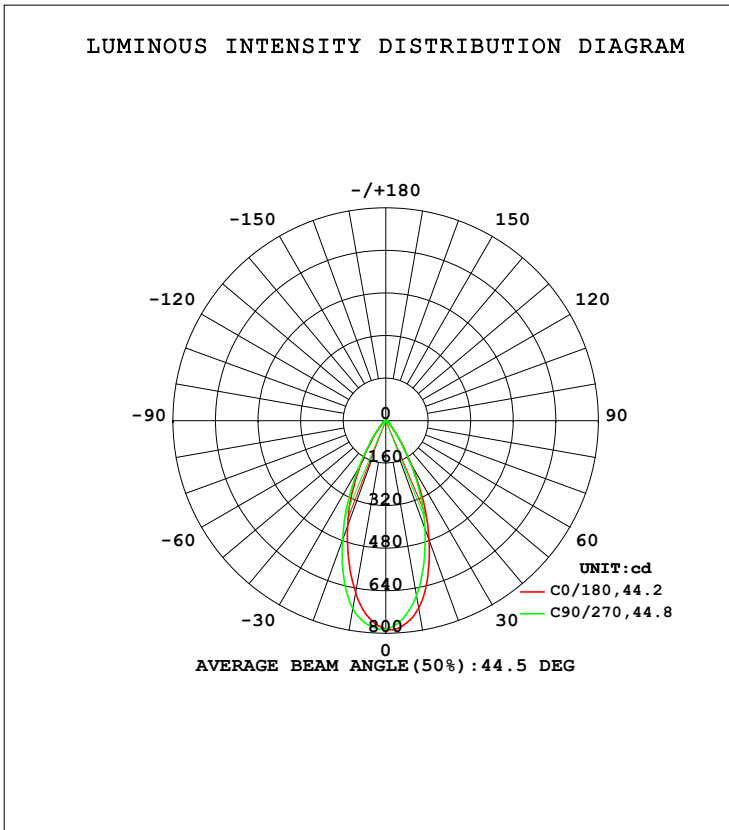

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	715.8	694.7	667.7	649.1	656.6	686.4	716.6	725.1	0- 10	70.20	70.20	14.5,14.5
20	475.9	453.0	431.8	418.5	420.9	443.1	477.1	489.8	10- 20	159.5	229.7	47.5,47.5
30	197.7	190.3	191.9	190.9	189.2	193.0	204.3	206.3	20- 30	145.2	374.9	77.5,77.5
40	50.75	49.88	51.87	53.44	52.96	53.87	55.82	53.05	30- 40	67.08	442.0	91.4,91.4
50	15.68	16.21	17.35	18.59	18.40	17.71	16.43	15.93	40- 50	23.11	465.1	96.2,96.2
60	7.145	7.160	7.395	7.759	7.985	8.030	7.680	7.320	50- 60	10.42	475.5	98.4,98.4
70	3.346	3.383	3.542	3.643	3.654	3.567	3.462	3.383	60- 70	5.170	480.7	99.4,99.4
80	1.286	1.290	1.096	1.330	1.405	1.137	0.8367	1.121	70- 80	2.453	483.2	99.9,99.9
90	0.0147	0	0.0037	0	0.0183	0.0067	0.0060	0.0043	80- 90	0.3383	483.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

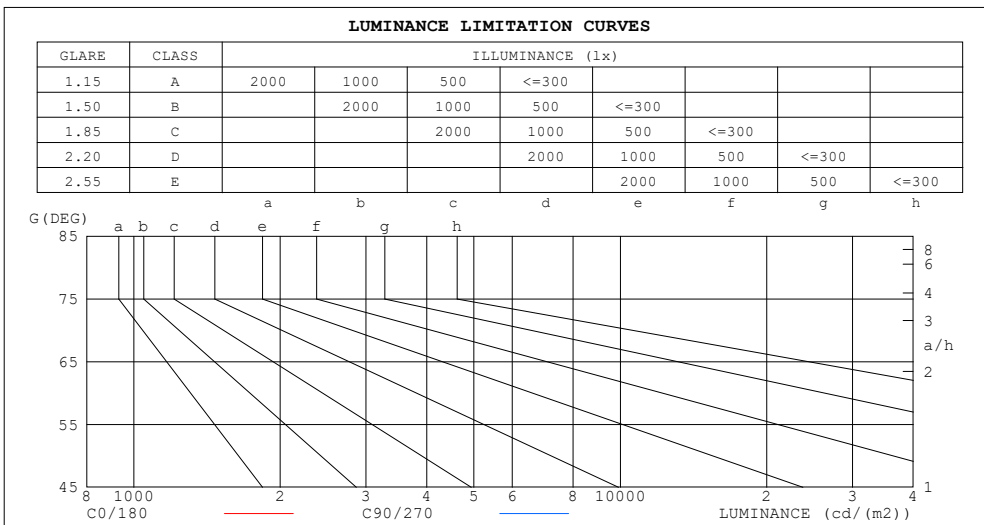

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	15	2
80	67	57
75	77	82
70	88	93
65	99	105
60	129	133
55	169	180
50	220	243
45	337	366


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.07	1.05	1.05	1.03	1.01	1.01	.00	.98	.98	.97	.96	.94
2.0	1.03	.00	.96	1.02	.98	.95	.99	.96	.93	.96	.93	.91	.93	.91	.89	.88
3.0	.97	.92	.88	.96	.91	.88	.93	.89	.86	.91	.87	.85	.88	.86	.84	.82
4.0	.91	.86	.82	.90	.85	.81	.88	.84	.80	.86	.82	.79	.84	.81	.78	.77
5.0	.86	.80	.76	.85	.80	.76	.83	.78	.75	.81	.77	.74	.80	.76	.74	.72
6.0	.81	.75	.71	.80	.75	.71	.79	.74	.70	.77	.73	.70	.76	.72	.70	.68
7.0	.77	.71	.67	.76	.71	.67	.75	.70	.66	.74	.69	.66	.72	.69	.66	.64
8.0	.73	.67	.63	.72	.67	.63	.71	.66	.63	.70	.66	.62	.69	.65	.62	.61
9.0	.69	.64	.60	.69	.63	.60	.68	.63	.59	.67	.62	.59	.66	.62	.59	.58
10.0	.66	.60	.57	.65	.60	.57	.65	.60	.57	.64	.59	.56	.63	.59	.56	.55

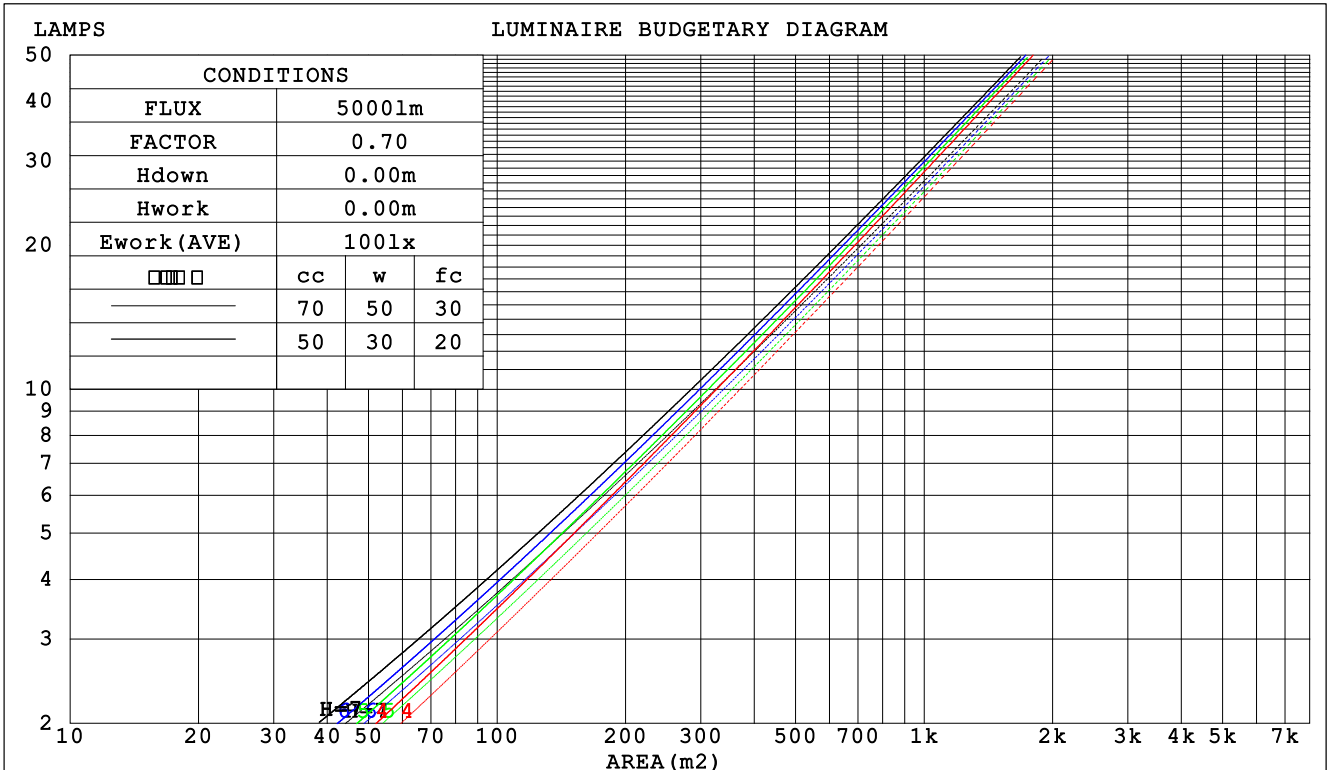

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.175 .099 .031	.168 .096 .030	.156 .089 .028	.144 .083 .027	.133 .077 .025	
2.0	.166 .091 .028	.161 .089 .027	.150 .084 .026	.140 .079 .025	.131 .074 .023	
3.0	.158 .084 .025	.153 .082 .025	.144 .078 .024	.136 .074 .023	.128 .071 .022	
4.0	.149 .078 .023	.145 .076 .022	.138 .073 .022	.130 .070 .021	.124 .067 .020	
5.0	.142 .072 .021	.138 .071 .021	.131 .068 .020	.125 .066 .020	.119 .064 .019	
6.0	.135 .068 .019	.132 .067 .019	.126 .064 .019	.120 .063 .018	.115 .061 .018	
7.0	.129 .064 .018	.126 .063 .018	.121 .061 .018	.116 .059 .017	.111 .058 .017	
8.0	.123 .060 .017	.120 .059 .017	.116 .058 .017	.111 .056 .016	.107 .055 .016	
9.0	.117 .057 .016	.115 .056 .016	.111 .055 .016	.107 .054 .015	.104 .053 .015	
10.0	.113 .054 .015	.111 .053 .015	.107 .052 .015	.103 .051 .015	.100 .050 .014	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .086	.058 .054 .050	.018 .017 .016	
2.0	.156 .133 .113	.133 .114 .098	.091 .079 .068	.053 .046 .040	.017 .015 .013	
3.0	.143 .114 .090	.122 .098 .078	.084 .068 .055	.049 .040 .032	.016 .013 .011	
4.0	.132 .099 .073	.113 .085 .064	.078 .059 .045	.045 .035 .026	.015 .011 .009	
5.0	.123 .087 .060	.106 .075 .052	.073 .053 .037	.042 .031 .022	.014 .010 .007	
6.0	.116 .078 .050	.099 .067 .044	.069 .047 .031	.040 .028 .018	.013 .009 .006	
7.0	.109 .070 .043	.094 .061 .037	.065 .043 .026	.038 .025 .016	.012 .008 .005	
8.0	.103 .064 .037	.089 .055 .032	.061 .039 .023	.036 .023 .014	.012 .008 .004	
9.0	.098 .058 .032	.084 .051 .028	.058 .036 .020	.034 .021 .012	.011 .007 .004	
10.0	.093 .054 .028	.080 .047 .024	.056 .033 .017	.032 .020 .010	.011 .006 .003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm										
NAME: LED-1-S7W-5CCT					TYPE:			WEIGHT:		
SPEC.:3500K 90					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.2	7.1	6.4	7.2	7.4	6.1	7.0	6.3	7.2	7.3
3H	6.2	7.1	6.5	7.3	7.5	6.2	7.0	6.5	7.2	7.4
4H	6.3	7.0	6.5	7.3	7.5	6.2	7.0	6.5	7.3	7.5
6H	6.3	7.0	6.6	7.2	7.5	6.3	7.0	6.5	7.2	7.5
8H	6.2	7.0	6.5	7.2	7.5	6.2	6.9	6.5	7.2	7.4
12H	6.2	6.9	6.5	7.1	7.4	6.2	6.9	6.5	7.1	7.4
4H 2H	6.1	6.9	6.3	7.1	7.3	6.0	6.8	6.3	7.0	7.3
3H	6.2	6.9	6.5	7.2	7.4	6.2	6.9	6.5	7.2	7.4
4H	6.3	6.9	6.6	7.2	7.5	6.3	6.9	6.6	7.2	7.5
6H	6.4	6.9	6.7	7.2	7.6	6.4	6.9	6.7	7.2	7.6
8H	6.3	6.9	6.7	7.2	7.6	6.3	6.8	6.7	7.2	7.5
12H	6.3	6.8	6.7	7.1	7.5	6.3	6.7	6.7	7.1	7.5
8H 4H	6.3	6.8	6.6	7.1	7.5	6.3	6.8	6.6	7.1	7.5
6H	6.4	6.8	6.8	7.2	7.6	6.3	6.8	6.8	7.2	7.6
8H	6.4	6.7	6.8	7.1	7.6	6.3	6.7	6.8	7.1	7.5
12H	6.3	6.6	6.8	7.1	7.6	6.3	6.6	6.7	7.0	7.5
12H 4H	6.2	6.7	6.6	7.1	7.4	6.2	6.7	6.6	7.1	7.4
6H	6.3	6.7	6.8	7.1	7.6	6.3	6.7	6.8	7.1	7.5
8H	6.3	6.7	6.8	7.1	7.6	6.3	6.6	6.8	7.0	7.5
Variations with the observer position at spacings:										
S = 1.0H	+ 2.3 / - 2.8					+ 2.0 / - 2.6				
1.5H	+ 3.8 / - 2.2					+ 3.4 / - 2.1				
2.0H	+ 2.5 / - 1.6					+ 2.8 / - 1.9				

CIE Pub.117, 483.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.5)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	75	72
0.80	94	88	84	93	87	84	92	87	83	79
1.00	98	93	89	97	92	89	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

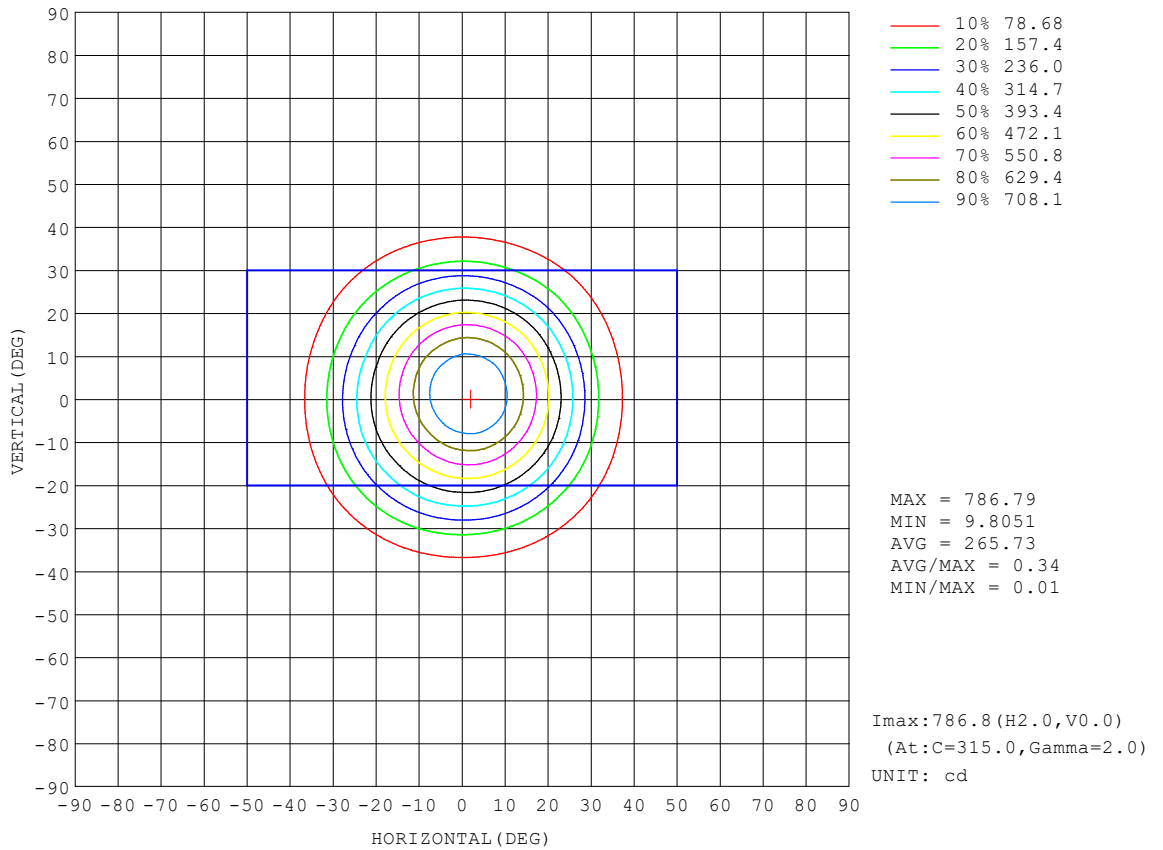


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

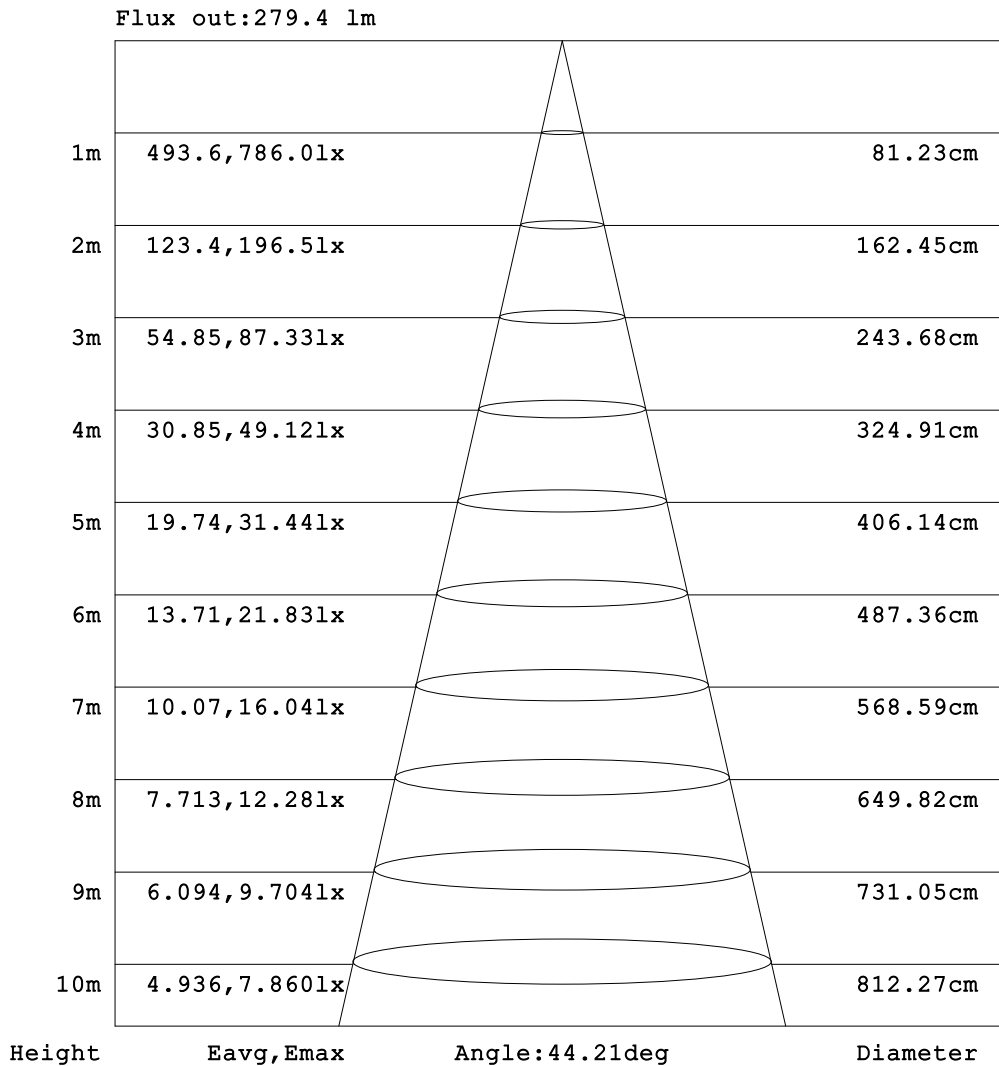


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

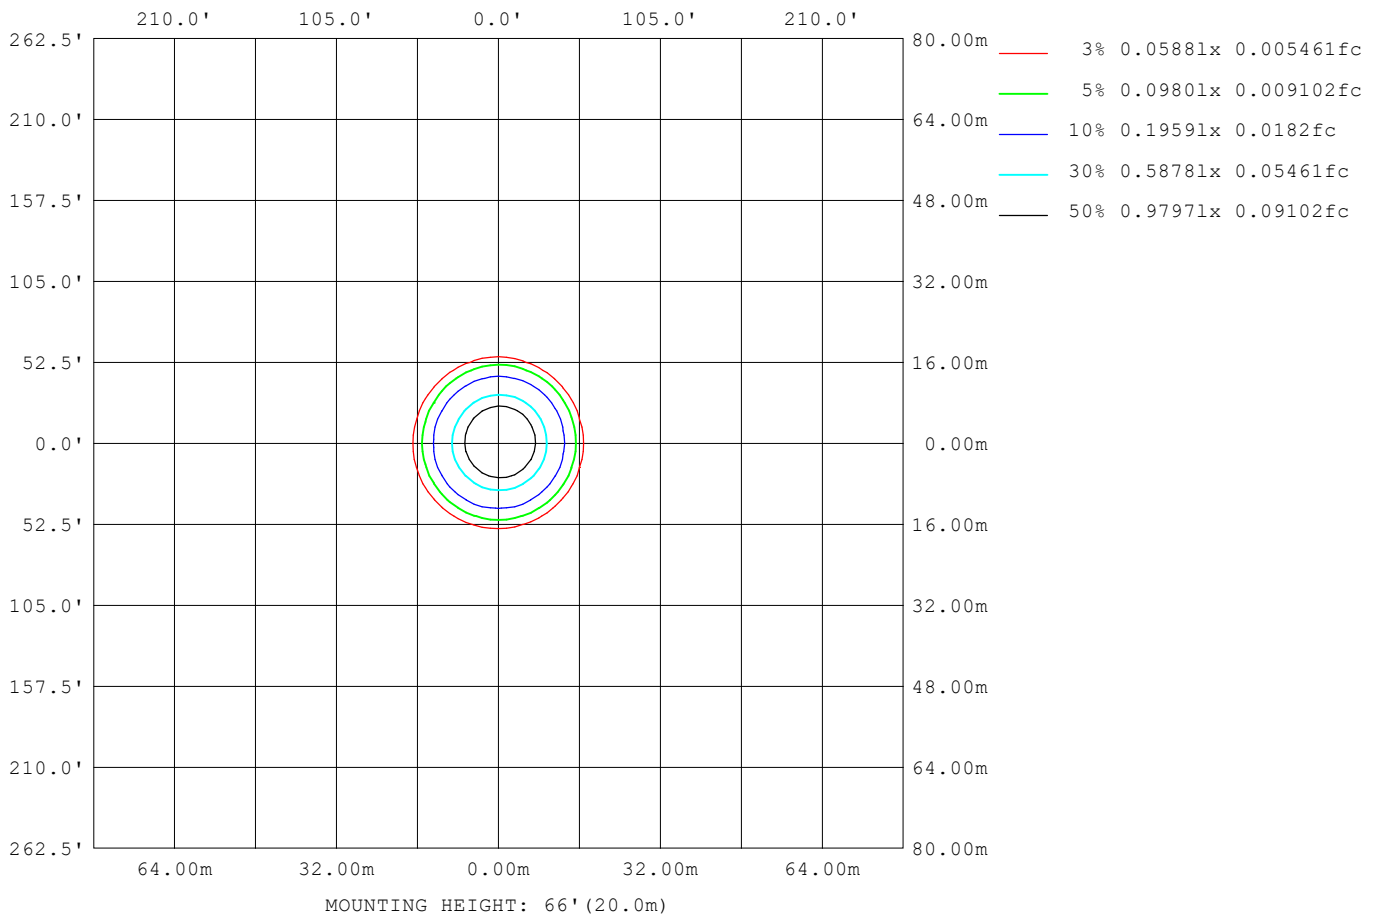

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	107
L_0~180 (75) av	81
L_0~180 (85) av	20
L_90~270 (65) av	107
L_90~270 (75) av	81
L_90~270 (85) av	1
L_45 (65) av	107
L_45 (75) av	81
L_45 (85) av	4

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

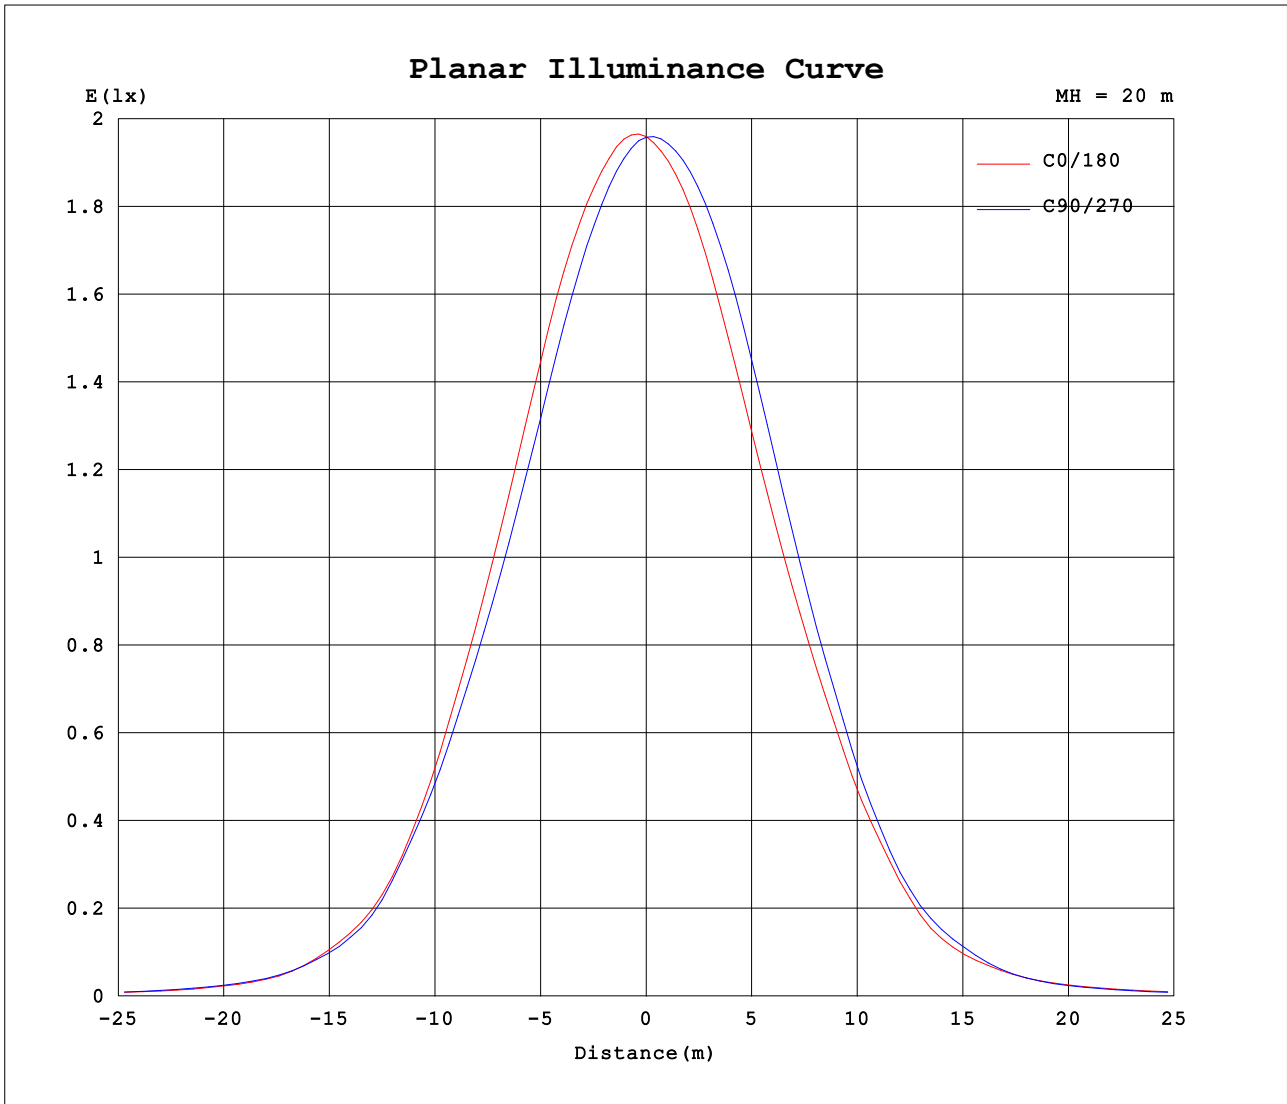

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-11-30

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.99V I:0.0840A P:6.9670W PF:0.9060 Freq:59.98Hz Lamp Flux:483.494x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:3500K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	783	783	783	783	783	783	783	783	783	783	783	783	783	783	783	783			
5	772	768	761	755	747	742	739	740	743	749	756	764	771	775	777	775			
10	716	708	695	682	668	657	649	650	657	669	686	701	717	722	725	721			
15	610	599	582	569	554	541	533	535	541	552	573	592	612	622	625	620			
20	476	467	453	444	432	424	418	419	421	426	443	461	477	484	490	481			
25	337	332	324	316	310	306	300	302	302	300	312	326	339	344	344	340			
30	198	196	190	193	192	193	191	188	189	188	193	201	204	203	206	200			
35	105	103	99.2	98.1	97.9	97.2	97.0	95.9	95.8	97.0	101	105	111	111	111	108			
40	50.7	50.8	49.9	51.5	51.9	53.1	53.4	53.6	53.0	52.8	53.9	55.0	55.8	53.9	53.0	51.5			
45	26.4	26.9	27.2	28.0	28.8	29.9	30.3	30.1	29.6	29.4	29.3	28.6	27.9	26.8	26.6	26.5			
50	15.7	16.0	16.2	16.8	17.4	18.3	18.6	18.6	18.4	18.0	17.7	17.0	16.4	15.9	15.9	15.6			
55	10.7	10.9	11.0	11.3	11.5	11.9	12.0	12.1	12.1	12.0	12.0	11.6	11.4	11.0	11.0	10.7			
60	7.14	7.16	7.16	7.26	7.39	7.62	7.76	7.90	7.98	8.00	8.03	7.86	7.68	7.45	7.32	7.16			
65	4.66	4.65	4.67	4.79	4.92	5.10	5.24	5.31	5.35	5.31	5.32	5.21	5.13	4.99	4.86	4.72			
70	3.35	3.36	3.38	3.47	3.54	3.62	3.64	3.66	3.65	3.60	3.57	3.50	3.46	3.40	3.38	3.35			
75	2.23	2.23	2.25	2.31	2.36	2.41	2.42	2.44	2.43	2.39	2.36	2.30	2.29	2.25	2.24	2.22			
80	1.29	1.29	1.29	1.17	1.10	1.14	1.33	1.40	1.41	1.38	1.14	0.89	0.84	0.90	1.12	1.28			
85	0.14	0.42	0.09	0.01	0.02	0.01	0.04	0.41	0.25	0.30	0.01	0.01	0.01	0.01	0.01	0.30			
90	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.01	0.01	0.00	0.01	0.01	0.00	0.01			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-11-30

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: