
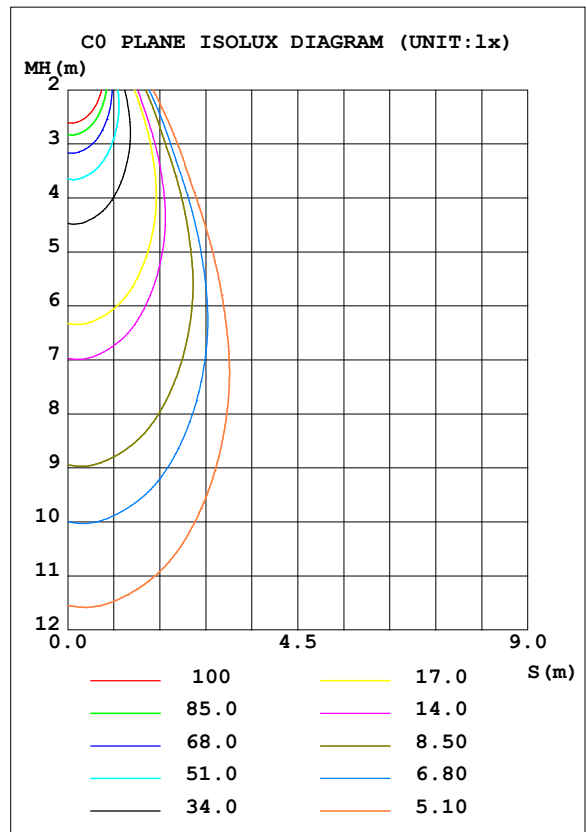


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 62.52 lm/W			
MODEL	LED-1-S7W-5CCT	I _{max} (cd)	685.5	S/MH (C0/180)	0.68
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	0.75
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	445.71	<input type="checkbox"/> UP, DN (C0-180)	0.0, 49.3
NOMINAL FLUX (lm)	445.706	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 50.7
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	12	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.75

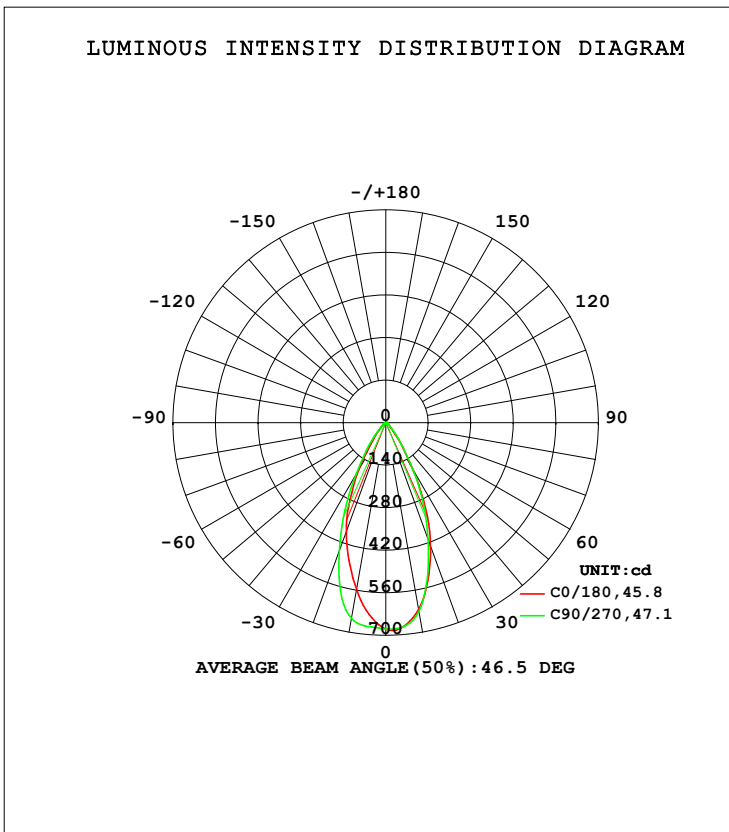

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	624.3	648.0	630.5	576.3	556.7	605.0	653.7	634.8	0- 10	61.88	61.88	13.9,13.9
20	430.9	421.1	407.2	382.8	380.1	409.5	447.3	447.9	10- 20	145.2	207.1	46.5,46.5
30	182.3	179.4	183.0	179.7	176.1	185.4	197.2	194.3	20- 30	135.5	342.6	76.9,76.9
40	43.59	49.07	53.03	49.78	46.24	52.48	57.60	49.12	30- 40	63.67	406.3	91.2,91.2
50	14.54	15.33	16.73	17.45	17.16	17.06	15.89	15.07	40- 50	21.87	428.2	96.1,96.1
60	6.704	6.824	7.186	7.368	7.553	7.872	7.531	7.004	50- 60	9.928	438.1	98.3,98.3
70	3.160	3.223	3.419	3.450	3.441	3.433	3.332	3.218	60- 70	4.950	443.0	99.4,99.4
80	1.202	1.224	1.059	1.258	1.327	1.105	0.8054	1.067	70- 80	2.338	445.4	99.9,99.9
90	0.0083	0	0	0	0.0127	0.0023	0.0050	0.0010	80- 90	0.3203	445.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

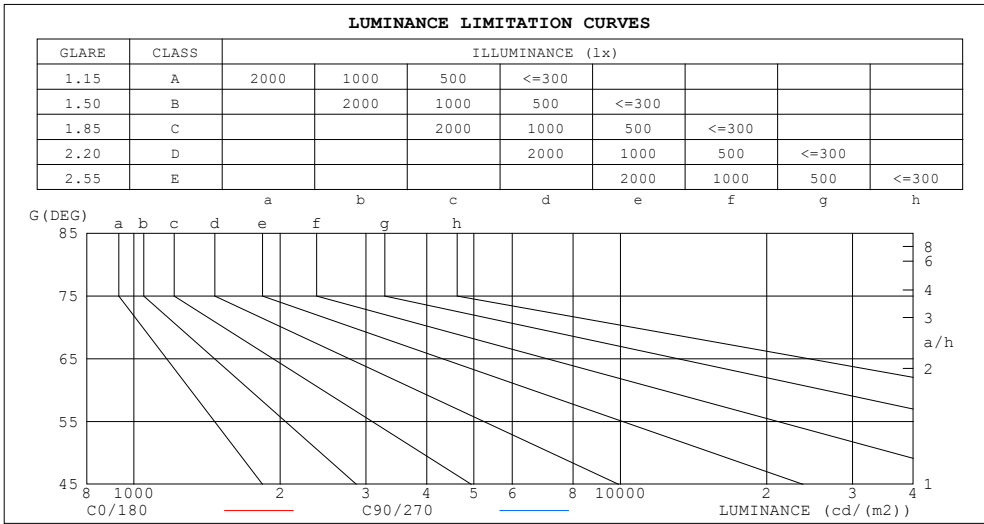

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14	1
80	62	55
75	73	79
70	83	90
65	94	101
60	121	129
55	158	174
50	204	234
45	305	358


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.06	1.05	1.05	1.03	1.01	1.01	.00	.98	.98	.96	.95	.94
2.0	1.03	.99	.96	1.02	.98	.95	.98	.95	.93	.95	.93	.91	.93	.91	.89	.87
3.0	.97	.92	.88	.95	.91	.87	.93	.89	.86	.90	.87	.85	.88	.85	.83	.82
4.0	.91	.85	.81	.90	.85	.81	.87	.83	.80	.85	.82	.79	.84	.81	.78	.77
5.0	.85	.80	.76	.84	.79	.75	.83	.78	.75	.81	.77	.74	.79	.76	.73	.72
6.0	.81	.75	.71	.80	.74	.70	.78	.74	.70	.77	.73	.70	.76	.72	.69	.68
7.0	.76	.70	.66	.76	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.65	.64
8.0	.72	.67	.63	.72	.66	.62	.71	.66	.62	.70	.65	.62	.69	.65	.62	.60
9.0	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.59	.66	.61	.59	.57
10.0	.65	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.63	.59	.56	.54

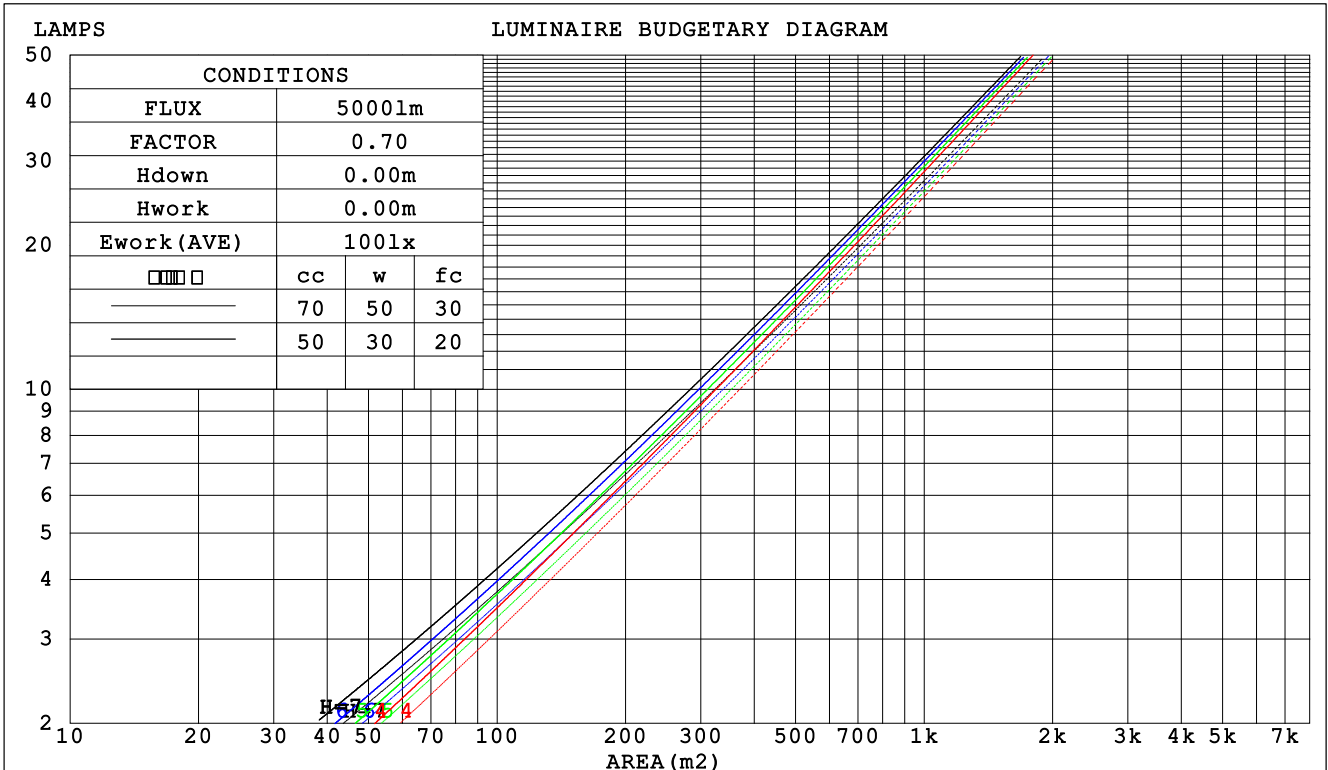

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Wall Exitance Coefficients (WEC)			
0.0						
1.0	.176 .100 .032	.169 .097 .031	.157 .090 .029	.145 .084 .027	.135 .078 .025	
2.0	.168 .092 .028	.162 .089 .028	.152 .084 .026	.142 .080 .025	.133 .075 .024	
3.0	.159 .085 .025	.154 .083 .025	.145 .079 .024	.137 .075 .023	.129 .071 .022	
4.0	.151 .078 .023	.147 .077 .023	.139 .074 .022	.132 .071 .021	.125 .068 .021	
5.0	.143 .073 .021	.139 .072 .021	.133 .069 .020	.126 .067 .020	.121 .064 .019	
6.0	.136 .068 .020	.133 .067 .019	.127 .065 .019	.121 .063 .019	.116 .061 .018	
7.0	.130 .064 .018	.127 .063 .018	.122 .062 .018	.117 .060 .017	.112 .058 .017	
8.0	.124 .061 .017	.121 .060 .017	.117 .058 .017	.112 .057 .016	.108 .056 .016	
9.0	.118 .057 .016	.116 .057 .016	.112 .055 .016	.108 .054 .016	.105 .053 .015	
10.0	.114 .054 .015	.112 .054 .015	.108 .053 .015	.104 .052 .015	.101 .051 .015	

<input type="checkbox"/> cc	80%	70%	50%	30%	10%	0
<input type="checkbox"/> w	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
<input type="checkbox"/> fc	20%	20%	20%	20%	20%	0
RCR	RCR:Room Cavity Ratio		Ceiling Cavity Exitance Coefficients (CCEC)			
0.0	.190 .190 .190	.163 .163 .163	.111 .111 .111	.064 .064 .064	.020 .020 .020	
1.0	.171 .157 .145	.146 .135 .125	.100 .093 .086	.058 .054 .050	.018 .017 .016	
2.0	.156 .133 .113	.133 .114 .098	.091 .079 .068	.053 .046 .040	.017 .015 .013	
3.0	.143 .114 .090	.123 .098 .078	.084 .068 .055	.049 .040 .032	.016 .013 .011	
4.0	.133 .099 .073	.114 .085 .063	.078 .059 .045	.045 .035 .026	.015 .011 .009	
5.0	.124 .087 .060	.106 .075 .052	.073 .053 .037	.042 .031 .022	.014 .010 .007	
6.0	.116 .078 .050	.100 .067 .044	.069 .047 .031	.040 .028 .018	.013 .009 .006	
7.0	.109 .070 .043	.094 .061 .037	.065 .043 .026	.038 .025 .016	.012 .008 .005	
8.0	.103 .064 .037	.089 .055 .032	.062 .039 .023	.036 .023 .013	.012 .008 .004	
9.0	.098 .059 .032	.085 .051 .028	.059 .036 .020	.034 .021 .012	.011 .007 .004	
10.0	.094 .054 .028	.081 .047 .024	.056 .033 .017	.033 .020 .010	.011 .006 .003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm										
NAME: LED-1-S7W-5CCT					TYPE:			WEIGHT:		
SPEC.:5000K 90					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.2	7.1	6.4	7.3	7.4	6.5	7.4	6.7	7.6	7.8
3H	6.3	7.1	6.5	7.3	7.5	6.6	7.5	6.9	7.7	7.9
4H	6.3	7.1	6.6	7.3	7.5	6.7	7.5	6.9	7.7	7.9
6H	6.3	7.1	6.6	7.3	7.5	6.7	7.4	7.0	7.6	7.9
8H	6.3	7.0	6.6	7.3	7.5	6.6	7.3	6.9	7.6	7.9
12H	6.2	6.9	6.6	7.2	7.5	6.6	7.3	6.9	7.5	7.8
4H 2H	6.1	6.9	6.4	7.1	7.3	6.4	7.2	6.7	7.4	7.7
3H	6.3	7.0	6.6	7.2	7.5	6.6	7.3	6.9	7.6	7.8
4H	6.4	7.0	6.7	7.3	7.6	6.7	7.3	7.0	7.6	7.9
6H	6.4	7.0	6.8	7.3	7.6	6.7	7.3	7.1	7.6	8.0
8H	6.4	6.9	6.8	7.3	7.6	6.7	7.2	7.1	7.6	7.9
12H	6.4	6.8	6.8	7.2	7.6	6.7	7.1	7.1	7.5	7.9
8H 4H	6.3	6.8	6.7	7.2	7.5	6.6	7.2	7.0	7.5	7.9
6H	6.4	6.8	6.8	7.2	7.6	6.7	7.1	7.1	7.5	8.0
8H	6.4	6.8	6.9	7.2	7.7	6.7	7.1	7.1	7.5	7.9
12H	6.4	6.7	6.9	7.2	7.6	6.6	7.0	7.1	7.4	7.9
12H 4H	6.3	6.7	6.7	7.1	7.5	6.6	7.1	7.0	7.4	7.8
6H	6.4	6.8	6.8	7.2	7.6	6.7	7.1	7.1	7.5	7.9
8H	6.4	6.7	6.9	7.2	7.6	6.7	7.0	7.1	7.4	7.9
Variations with the observer position at spacings:										
S = 1.0H	+ 1.9 / - 2.7					+ 2.1 / - 2.8				
1.5H	+ 3.4 / - 2.0					+ 3.6 / - 2.3				
2.0H	+ 2.3 / - 1.5					+ 2.9 / - 1.9				

CIE Pub.117, 445.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.8)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	79	75	85	79	75	85	79	75	72
0.80	94	87	84	93	87	83	92	87	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

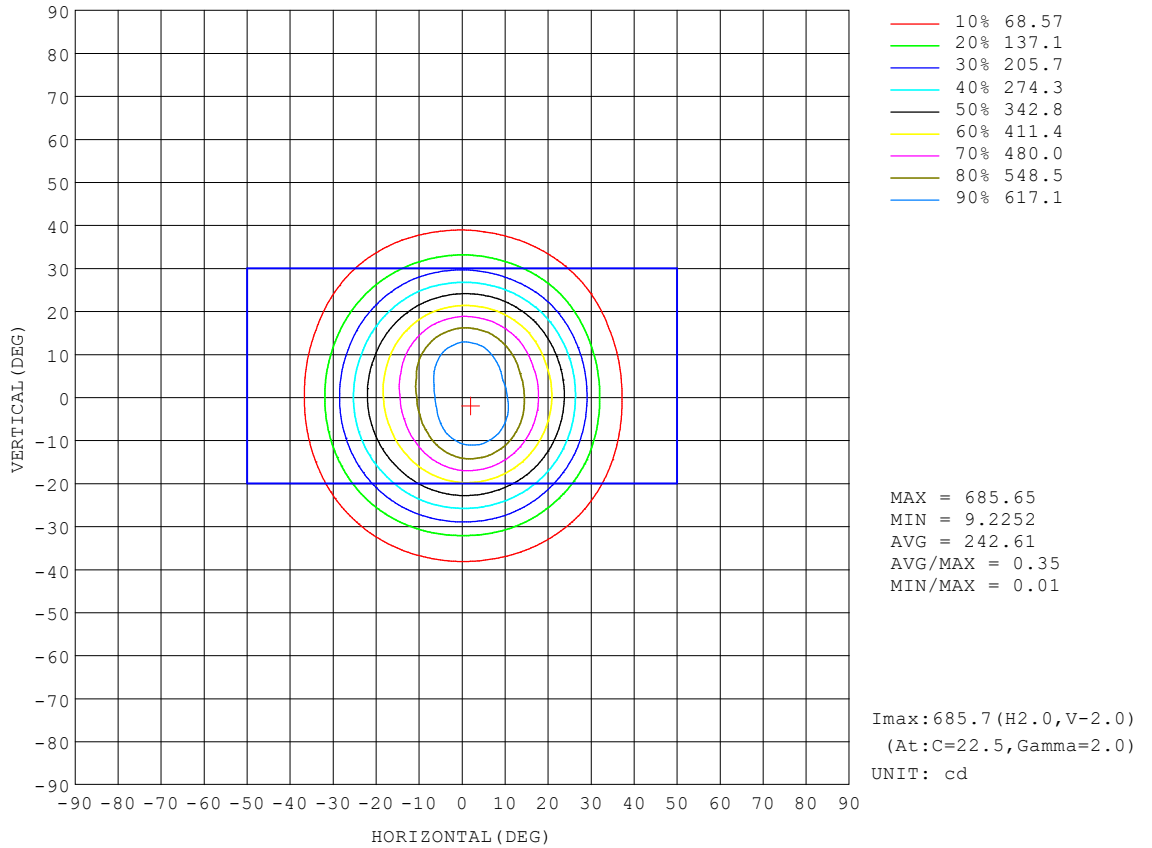


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

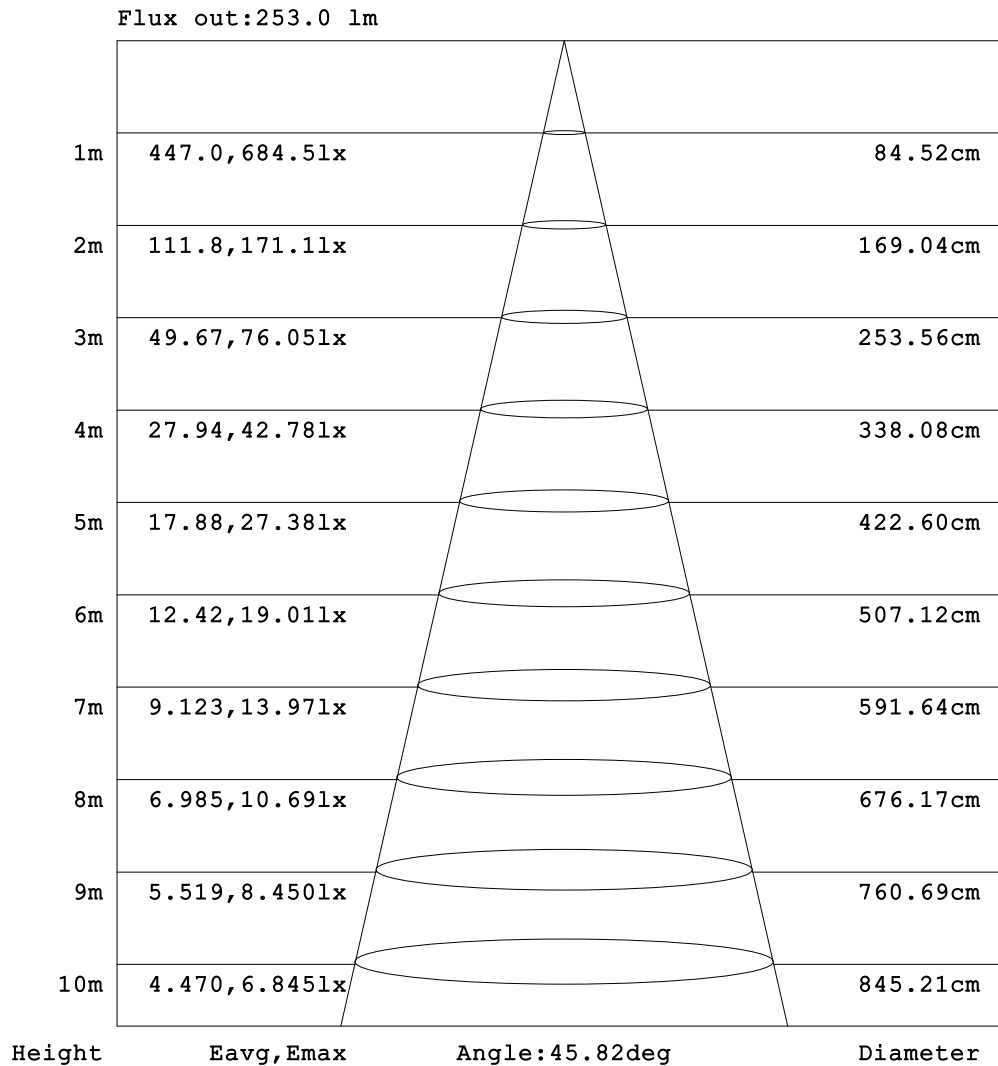


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

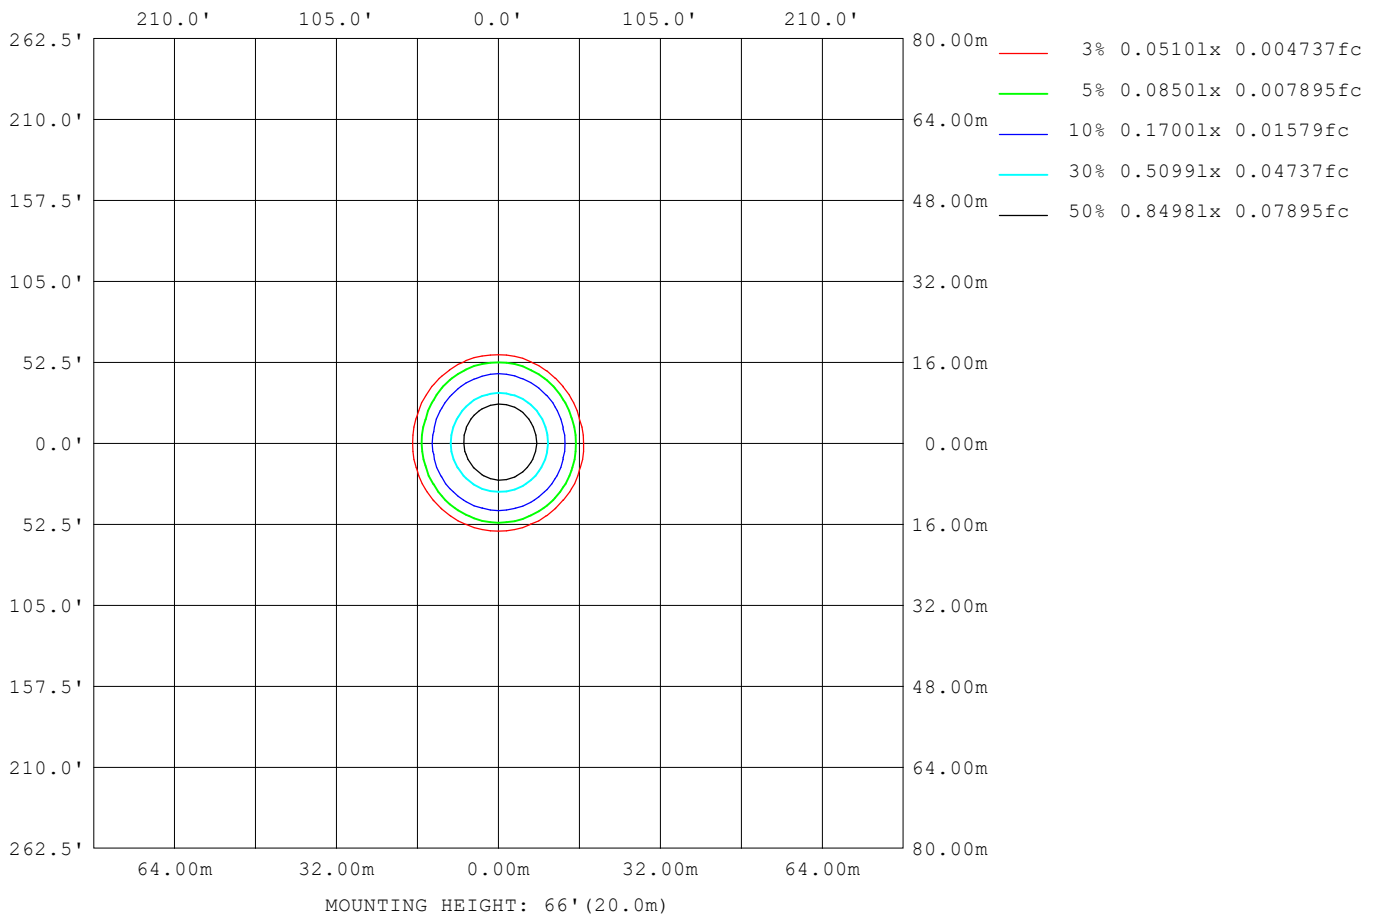

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	101
L_0~180 (75) av	76
L_0~180 (85) av	18
L_90~270 (65) av	104
L_90~270 (75) av	78
L_90~270 (85) av	1
L_45 (65) av	102
L_45 (75) av	77
L_45 (85) av	3

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

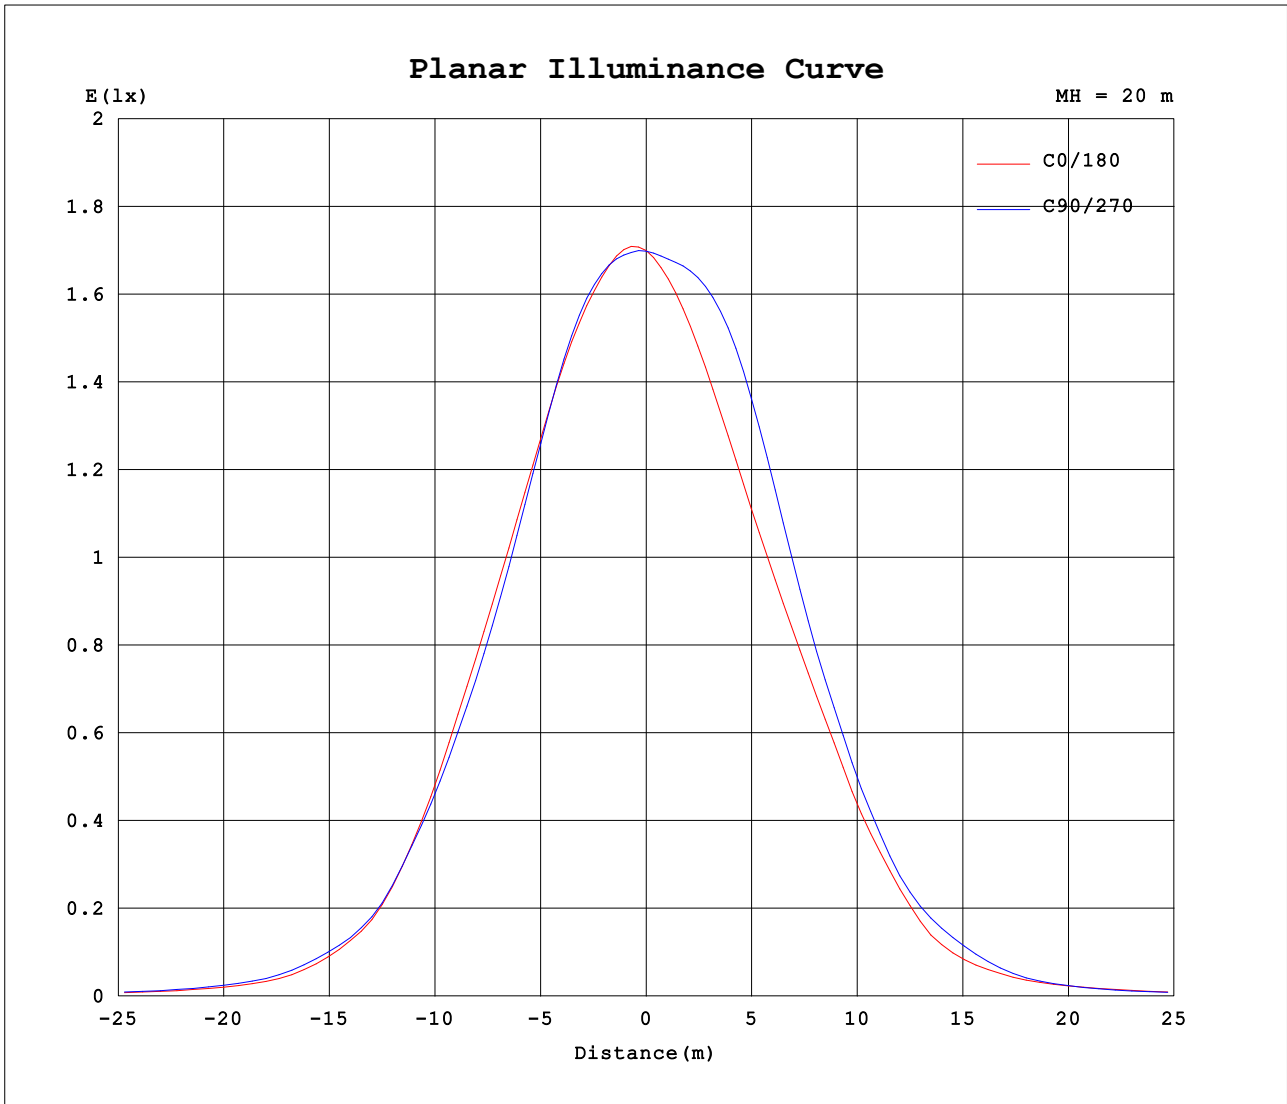

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2021-11-30

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.02V I:0.0849A P:7.1293W PF:0.9100 Freq:59.98Hz Lamp Flux:445.706x1 lm		
NAME: LED-1-S7W-5CCT	TYPE:	WEIGHT:
SPEC.:5000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	679	679	679	679	679	679	679	679	679	679	679	679	679	679	679	679			
5	673	679	683	682	675	662	647	636	634	640	653	665	673	674	672	670			
10	624	638	648	647	631	604	576	559	557	574	605	635	654	650	635	621			
15	537	544	548	544	529	505	480	468	469	487	520	554	576	577	559	541			
20	431	426	421	415	407	394	383	378	380	390	410	433	447	451	448	434			
25	311	306	302	296	293	288	279	279	280	282	295	311	320	324	322	315			
30	182	182	179	183	183	183	180	176	176	177	185	195	197	194	194	186			
35	92.4	95.3	97.3	99.1	97.5	95.2	90.6	86.3	85.5	89.2	98.5	107	113	109	103	94.6			
40	43.6	46.9	49.1	52.1	53.0	52.2	49.8	47.5	46.2	48.0	52.5	56.7	57.6	53.9	49.1	44.6			
45	23.9	25.0	26.0	27.2	28.2	28.7	28.3	27.5	26.9	27.2	28.1	28.1	27.3	25.8	24.9	24.1			
50	14.5	14.9	15.3	16.0	16.7	17.4	17.4	17.3	17.2	17.1	17.1	16.6	15.9	15.3	15.1	14.6			
55	10.1	10.2	10.5	10.8	11.1	11.3	11.4	11.4	11.4	11.4	11.6	11.4	11.1	10.7	10.4	10.1			
60	6.70	6.74	6.82	6.99	7.19	7.34	7.37	7.43	7.55	7.69	7.87	7.78	7.53	7.23	7.00	6.77			
65	4.40	4.40	4.45	4.58	4.75	4.90	4.97	5.00	5.05	5.09	5.17	5.10	4.98	4.80	4.64	4.48			
70	3.16	3.18	3.22	3.32	3.42	3.47	3.45	3.44	3.44	3.43	3.43	3.39	3.33	3.26	3.22	3.17			
75	2.09	2.11	2.14	2.22	2.28	2.31	2.29	2.28	2.28	2.28	2.28	2.24	2.21	2.16	2.13	2.10			
80	1.20	1.21	1.22	1.13	1.06	1.09	1.26	1.31	1.33	1.32	1.10	0.87	0.81	0.86	1.07	1.20			
85	0.13	0.39	0.08	0.01	0.01	0.01	0.04	0.38	0.23	0.29	0.01	0.01	0.01	0.01	0.01	0.28			
90	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.01	0.00	0.00	0.00			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2021-11-30

□ Range: 0 - 90DEG
 □ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.421
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: