
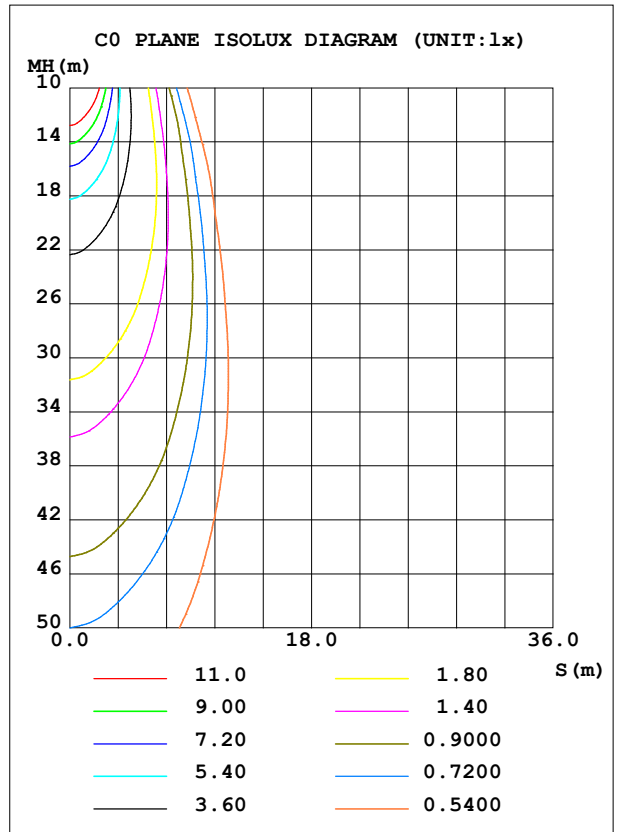


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 83.19 lm/W
MODEL		I _{max} (cd)	1801	S/MH (C0/180)		0.63
NOMINAL POWER (W)	11	LOR (%)	100.0	S/MH (C90/270)		0.57
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	959.44	η UP, DN (C0-180)		0.0, 50.9
NOMINAL FLUX (lm)	959.441	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0, 49.1
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		0.60

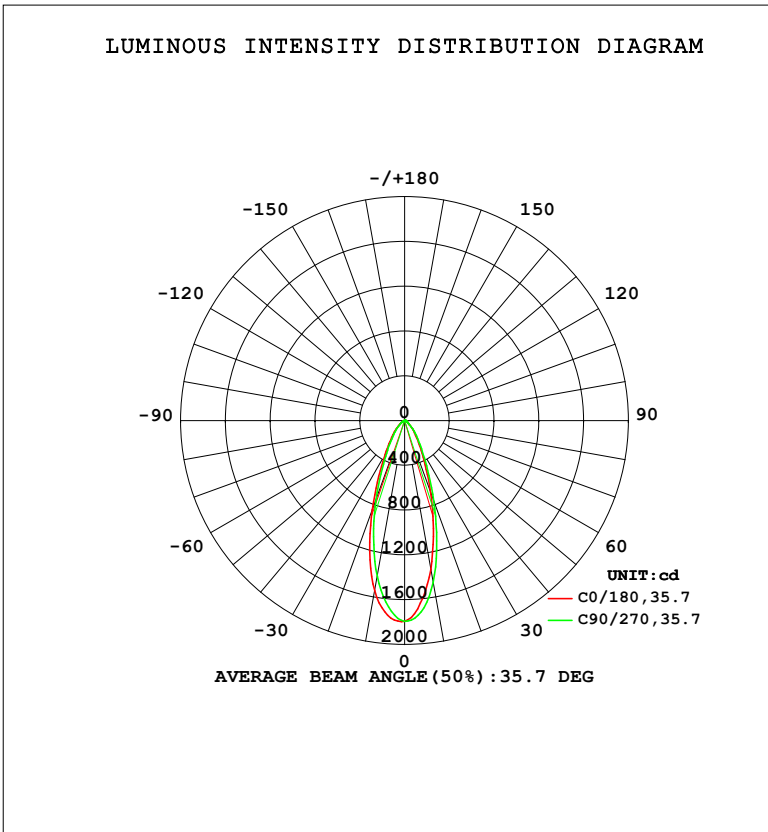

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1350	1406	1470	1547	1546	1463	1414	1368	0- 10	153.7	153.7	16,16
20	681.1	719.7	768.4	881.2	847.0	784.2	748.6	689.7	10- 20	302.0	455.7	47.5,47.5
30	285.8	300.8	319.7	371.9	350.3	320.4	307.1	285.3	20- 30	229.6	685.3	71.4,71.4
40	135.7	143.3	150.3	164.6	157.0	145.9	140.0	132.8	30- 40	135.6	820.9	85.6,85.6
50	52.95	54.17	56.11	65.39	65.72	60.70	56.23	52.99	40- 50	76.64	897.5	93.5,93.5
60	24.89	26.19	27.16	28.01	27.64	26.71	25.71	24.77	50- 60	36.36	933.9	97.3,97.3
70	8.459	9.226	9.761	9.781	8.704	9.923	9.425	8.963	60- 70	17.15	951.0	99.1,99.1
80	3.173	3.869	4.931	3.890	3.495	4.102	4.858	4.148	70- 80	6.958	958.0	99.8,99.8
90	0.0787	0.0760	0.0852	0.0723	0.0607	0.0553	0.0696	0.0579	80- 90	1.464	959.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 866.33 lm

%lum = 90.3%

%lamp = 90.3%

Conical surface Flux(130deg): 944.49 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

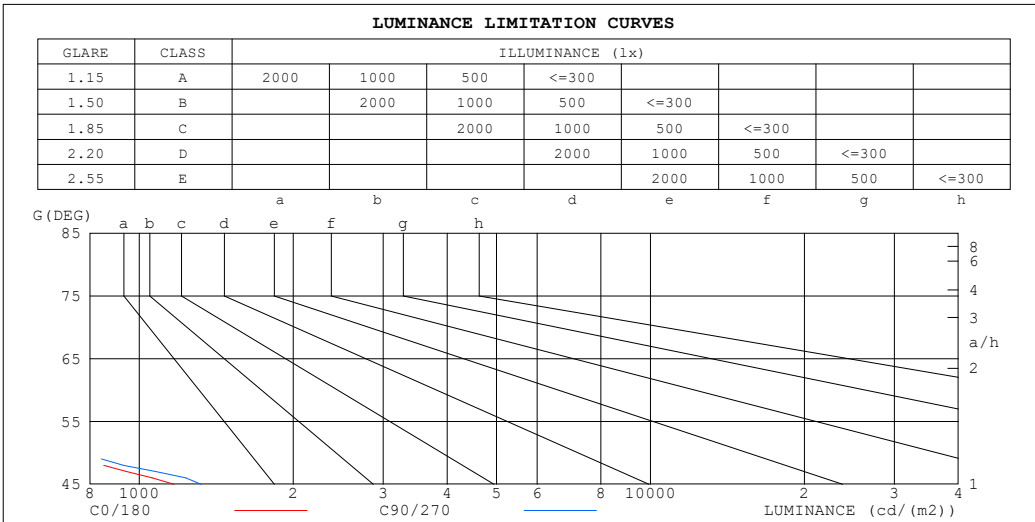

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	14	217
80	165	255
75	221	241
70	224	257
65	341	390
60	450	488
55	590	630
50	745	785
45	1168	1320


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.87	.94	.90	.86	.92	.88	.85	.89	.86	.83	.87	.84	.82	.80
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.81	.77	.82	.79	.77	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.73	.69	.79	.73	.69	.77	.72	.68	.76	.71	.68	.74	.71	.68	.66
7.0	.75	.69	.65	.74	.69	.65	.73	.68	.64	.72	.67	.64	.71	.67	.64	.62
8.0	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.67	.63	.60	.59
9.0	.68	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.57	.64	.60	.57	.56
10.0	.64	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.62	.57	.54	.53

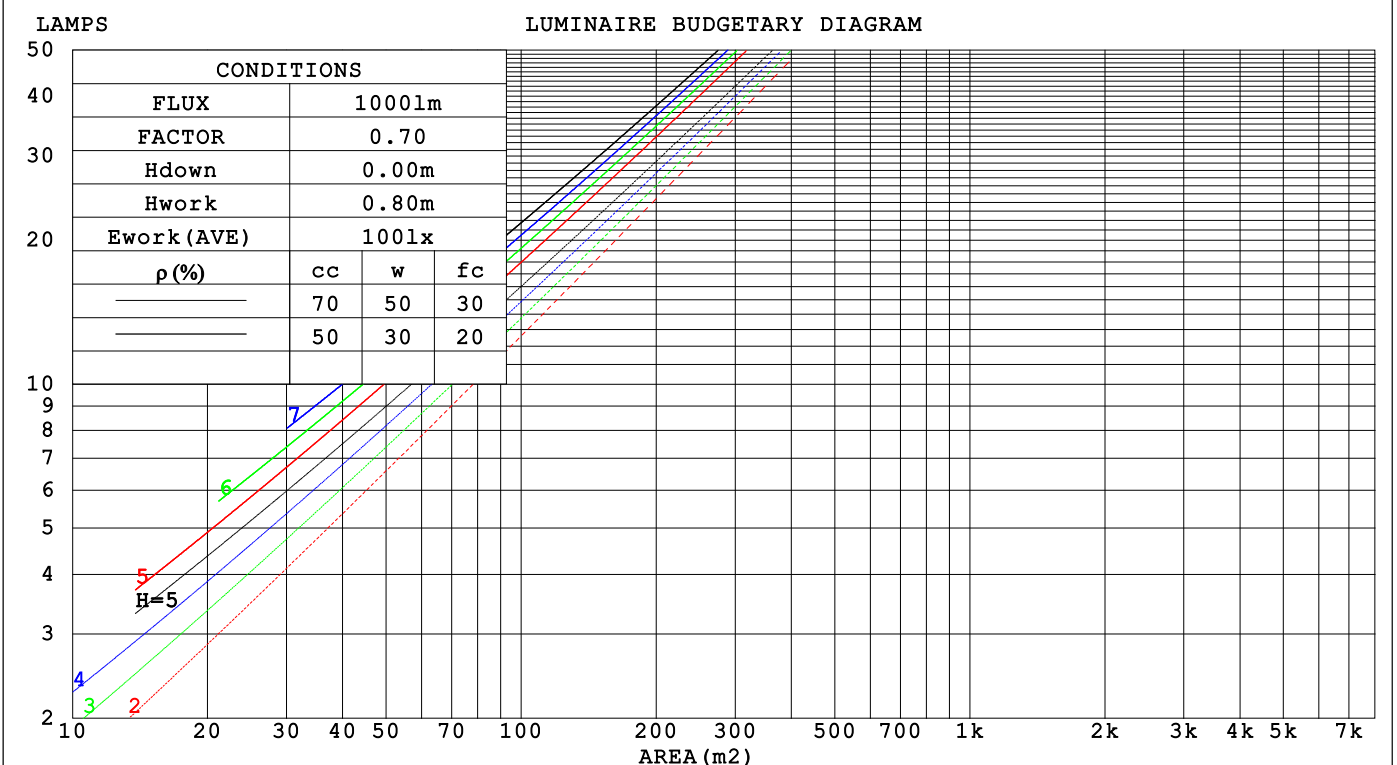

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3 °C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.441x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.183	.104	.033	.176	.101	.032	.164	.094	.030	.152	.088	.028	.141	.082	.026	
2.0	.175	.096	.029	.169	.093	.029	.158	.088	.027	.148	.083	.026	.139	.079	.025	
3.0	.165	.088	.026	.160	.086	.026	.151	.082	.025	.143	.078	.024	.135	.075	.023	
4.0	.156	.081	.024	.152	.080	.024	.144	.076	.023	.137	.074	.022	.130	.071	.022	
5.0	.148	.075	.022	.144	.074	.022	.137	.072	.021	.131	.069	.021	.125	.067	.020	
6.0	.140	.070	.020	.137	.069	.020	.131	.067	.020	.125	.065	.019	.120	.063	.019	
7.0	.133	.066	.019	.130	.065	.019	.125	.063	.018	.120	.062	.018	.115	.060	.018	
8.0	.127	.062	.017	.124	.061	.017	.119	.060	.017	.115	.058	.017	.111	.057	.017	
9.0	.121	.058	.016	.119	.058	.016	.114	.057	.016	.110	.055	.016	.107	.054	.016	
10.0	.115	.055	.015	.113	.055	.015	.110	.054	.015	.106	.053	.015	.103	.052	.015	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.125	.087	.059	.107	.076	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.101	.068	.043	.070	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.111	.070	.042	.095	.061	.037	.066	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.105	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004	
9.0	.099	.059	.031	.086	.051	.027	.059	.036	.019	.035	.021	.012	.011	.007	.004	
10.0	.094	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.1	9.0	8.3	9.2	9.4	8.4	9.3	8.6	9.5	9.7
3H	8.2	9.1	8.5	9.3	9.5	8.6	9.4	8.8	9.6	9.9
4H	8.2	9.1	8.5	9.3	9.5	8.6	9.4	8.9	9.7	9.9
6H	8.3	9.0	8.5	9.3	9.5	8.7	9.5	9.0	9.7	10.0
8H	8.2	9.0	8.5	9.2	9.5	8.7	9.5	9.0	9.7	10.0
12H	8.2	8.9	8.5	9.2	9.4	8.7	9.4	9.0	9.7	10.0
4H 2H	8.1	8.9	8.4	9.2	9.4	8.4	9.2	8.7	9.5	9.7
3H	8.3	9.0	8.6	9.3	9.6	8.7	9.4	9.0	9.6	9.9
4H	8.4	9.1	8.8	9.4	9.7	8.8	9.4	9.1	9.7	10.0
6H	8.5	9.0	8.8	9.4	9.7	8.9	9.5	9.3	9.8	10.2
8H	8.4	9.0	8.8	9.3	9.7	9.0	9.5	9.4	9.8	10.2
12H	8.4	8.9	8.8	9.3	9.7	9.0	9.5	9.4	9.8	10.2
8H 4H	8.4	8.9	8.8	9.3	9.6	8.7	9.3	9.1	9.6	10.0
6H	8.5	8.9	8.9	9.3	9.7	8.9	9.4	9.4	9.8	10.2
8H	8.5	8.9	8.9	9.3	9.7	9.0	9.4	9.5	9.8	10.3
12H	8.4	8.8	8.9	9.2	9.7	9.1	9.4	9.5	9.8	10.3
12H 4H	8.3	8.8	8.8	9.2	9.6	8.7	9.2	9.1	9.5	9.9
6H	8.5	8.9	8.9	9.3	9.7	8.9	9.3	9.3	9.7	10.1
8H	8.5	8.8	8.9	9.2	9.7	9.0	9.3	9.5	9.8	10.2

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.3 / - 2.1	+ 1.2 / - 1.9
1.5H	+ 1.8 / - 1.4	+ 2.0 / - 1.5
2.0H	+ 2.6 / - 1.6	+ 2.9 / - 1.5

CIE Pub.117, 959.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.1)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	82	75	71	82	75	71	81	75	71	67
0.80	91	84	79	90	83	79	88	83	79	75
1.00	96	89	85	95	89	85	93	89	84	80
1.25	100	94	90	99	94	90	97	93	89	85
1.50	103	98	94	102	97	94	100	96	93	88
2.00	107	102	98	105	101	98	103	99	96	91
2.50	109	104	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	109	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

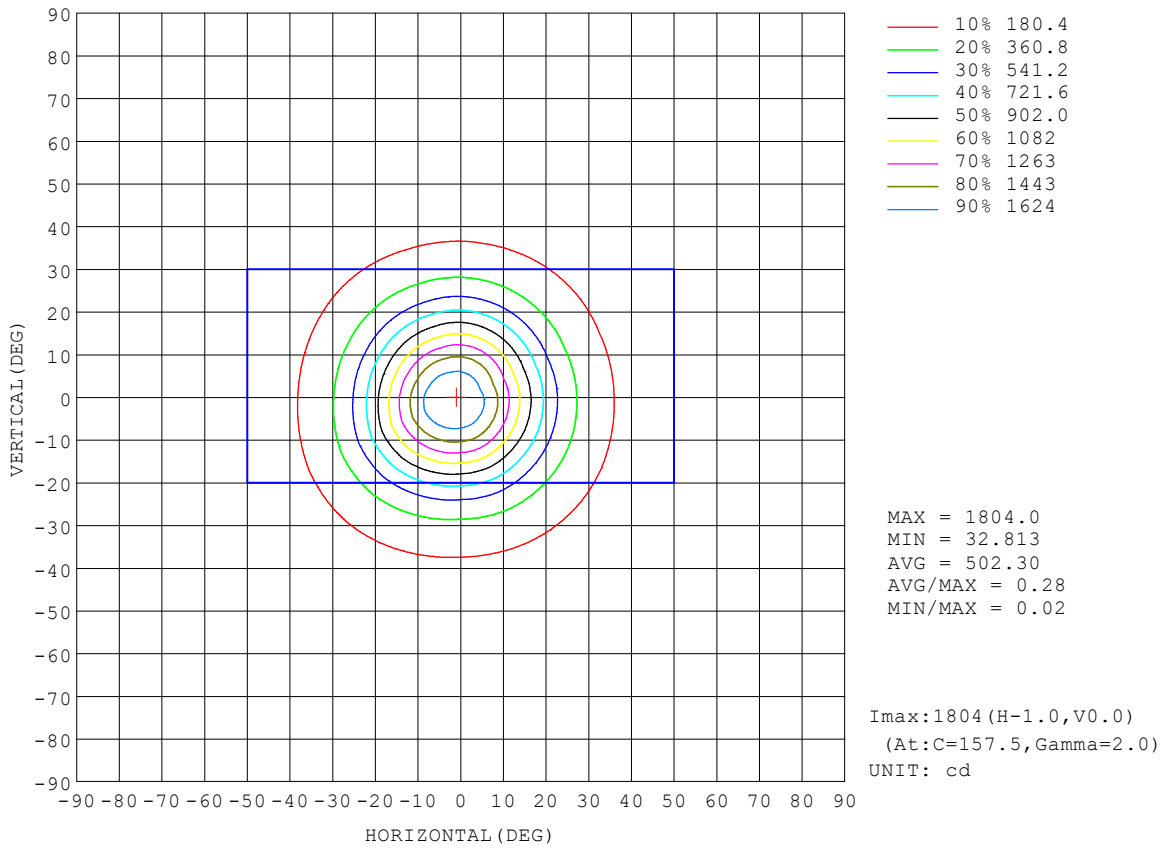


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

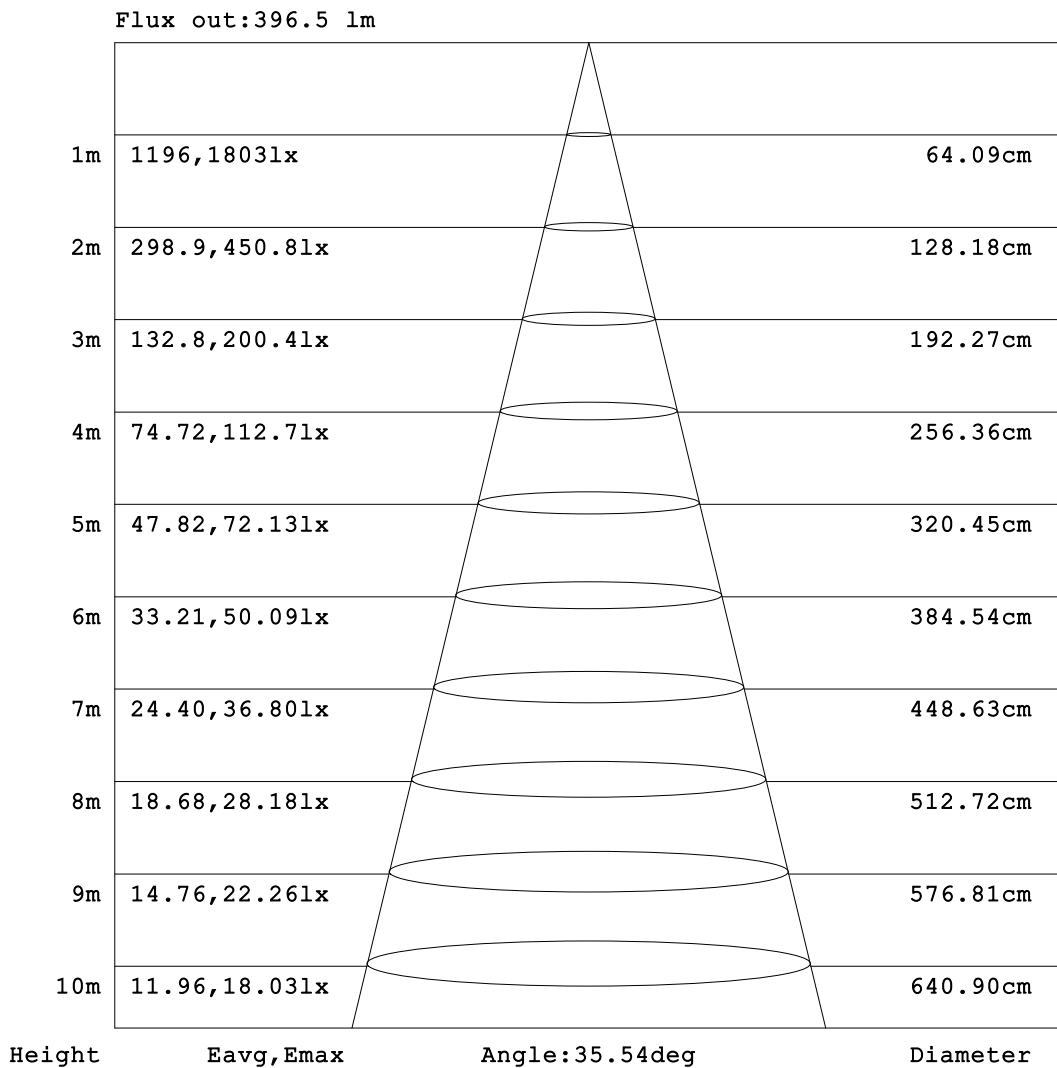


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3 °C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

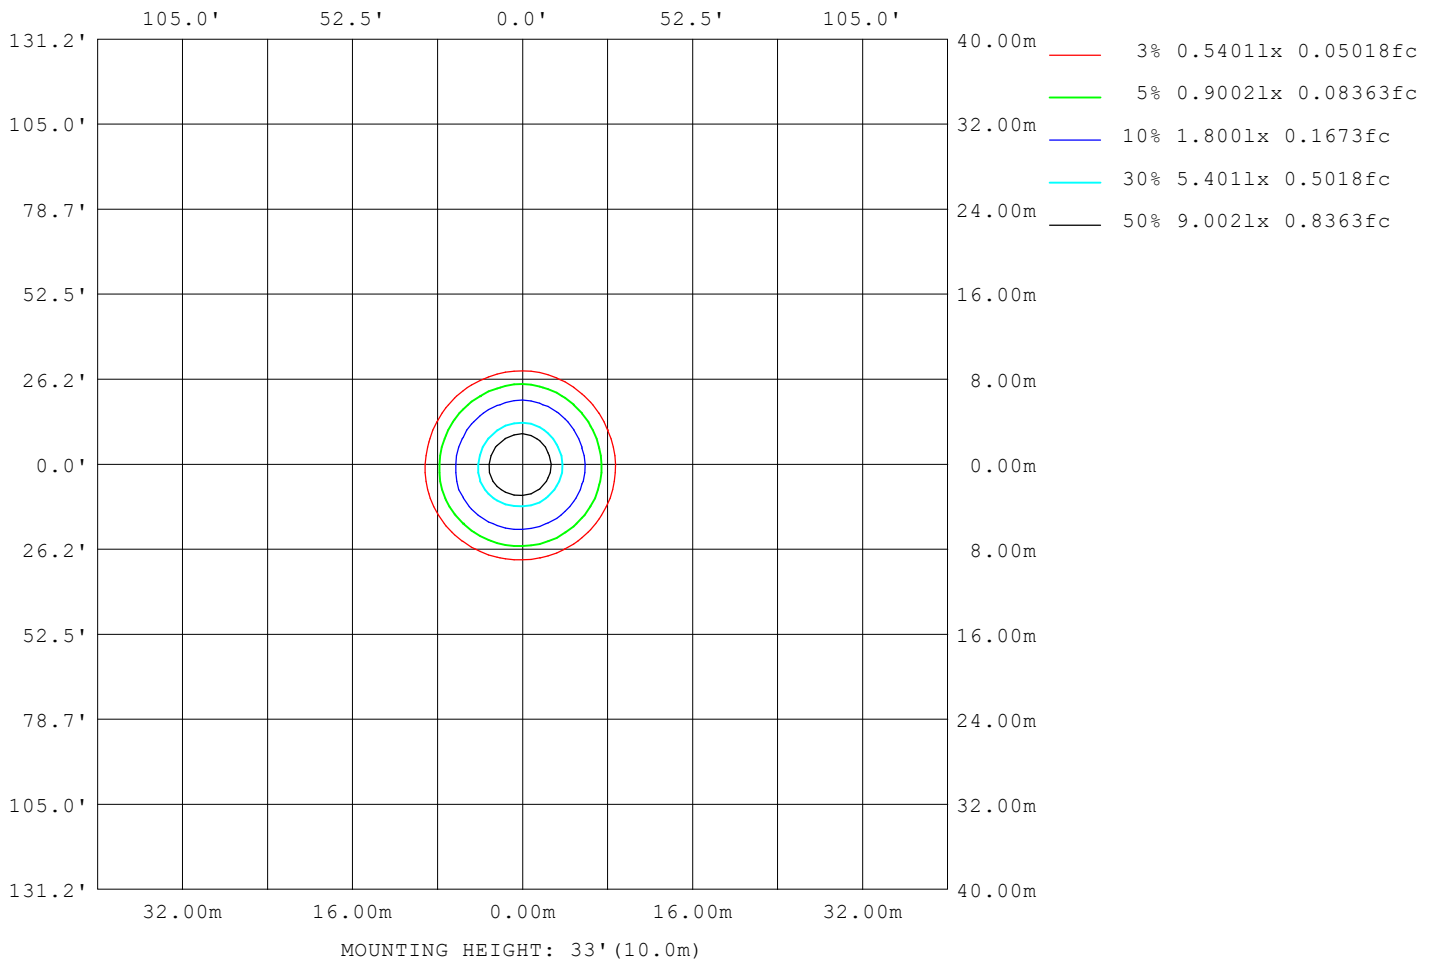

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:959.441x1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	355
L_0~180 (75) av	222
L_0~180 (85) av	26
L_90~270 (65) av	377
L_90~270 (75) av	244
L_90~270 (85) av	203
L_45 (65) av	371
L_45 (75) av	234
L_45 (85) av	60

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

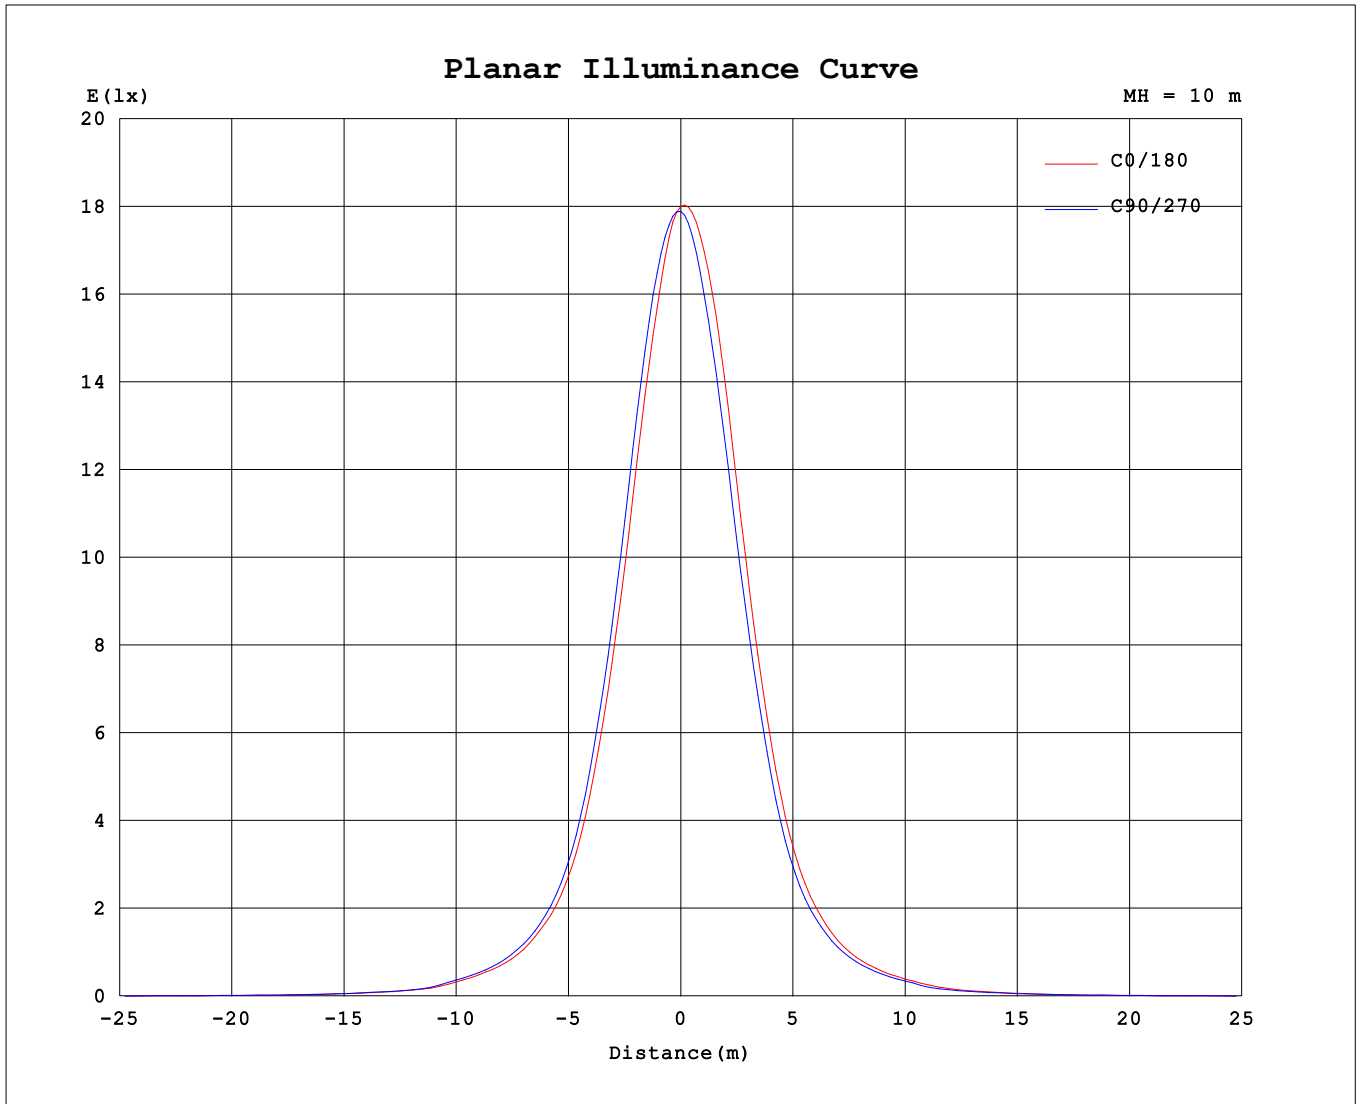

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.19V I:0.0975A P:11.533W PF:0.9840 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:959.44lx1 lm		
NAME: LED-2-S11W-5CCT-WH-EY	TYPE:	WEIGHT:
SPEC.: 3000K 90	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792			
5	1637	1659	1678	1704	1715	1732	1751	1767	1744	1722	1704	1679	1670	1655	1639	1624			
10	1350	1374	1406	1447	1470	1508	1547	1582	1546	1495	1463	1429	1414	1395	1368	1334			
15	998	1015	1044	1089	1113	1165	1226	1259	1206	1156	1121	1083	1075	1046	1015	979			
20	681	698	720	756	768	817	881	909	847	807	784	755	749	721	690	666			
25	437	449	461	486	494	531	580	597	549	519	502	483	478	460	439	424			
30	286	295	301	312	320	344	372	382	350	331	320	310	307	296	285	278			
35	194	202	206	212	218	231	246	253	230	219	211	204	204	197	192	188			
40	136	140	143	147	150	158	165	167	157	150	146	140	140	136	133	131			
45	91.4	94.9	98.3	102	104	110	115	116	110	105	103	98.7	98.0	95.3	92.1	88.7			
50	52.9	53.7	54.2	55.3	56.1	60.2	65.4	68.5	65.7	62.7	60.7	57.3	56.2	54.6	53.0	51.8			
55	37.4	38.5	39.0	39.9	40.2	41.9	43.9	45.5	44.6	43.3	41.5	39.5	39.2	38.1	37.1	36.3			
60	24.9	25.6	26.2	27.0	27.2	27.7	28.0	27.7	27.6	27.6	26.7	25.7	25.7	25.3	24.8	24.2			
65	15.9	16.4	17.1	18.0	18.3	18.8	18.7	17.3	17.4	18.5	18.0	17.2	17.1	16.7	16.1	15.5			
70	8.46	8.37	9.23	9.62	9.76	10.1	9.78	8.48	8.70	9.62	9.92	9.52	9.43	9.21	8.96	8.66			
75	6.33	6.39	6.58	6.93	6.94	6.77	6.55	6.56	6.44	6.51	6.83	7.06	7.10	7.06	6.95	6.54			
80	3.17	3.38	3.87	4.66	4.93	4.42	3.89	3.66	3.50	3.62	4.10	4.60	4.86	4.68	4.15	3.44			
85	0.14	0.15	0.55	1.64	2.10	1.42	0.70	0.47	0.37	0.39	0.67	1.32	1.83	1.19	0.40	0.13			
90	0.08	0.07	0.08	0.08	0.09	0.08	0.07	0.07	0.06	0.06	0.06	0.06	0.07	0.06	0.06	0.05			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: