
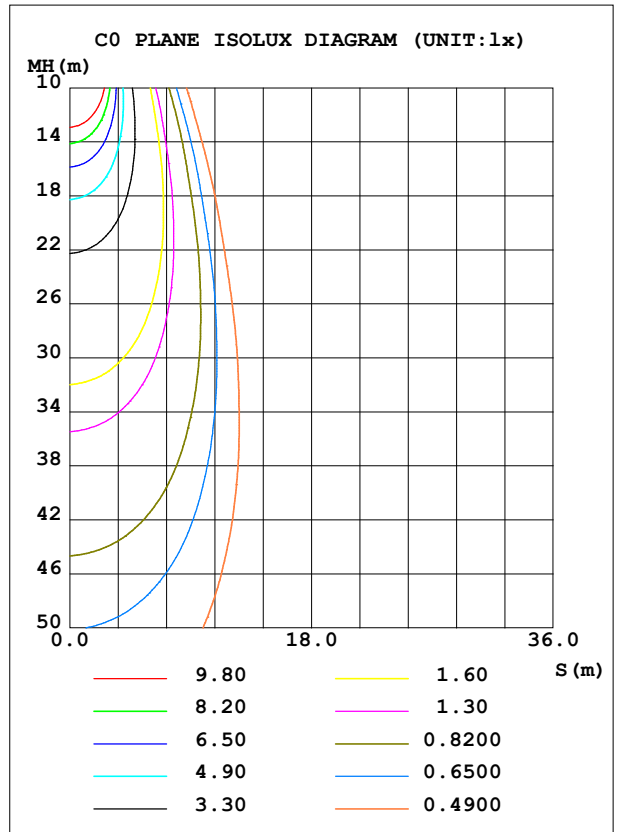


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODELLED-2-S11W-DTW-WH-EY-SQ		Imax (cd)	1648	S/MH (C0/180)	0.58
NOMINAL POWER (W)	11	LOR (%)	100.0	S/MH (C90/270)	0.51
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	853.65	η UP, DN (C0-180)	0.0, 54.3
NOMINAL FLUX (lm)	853.65	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 45.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.60

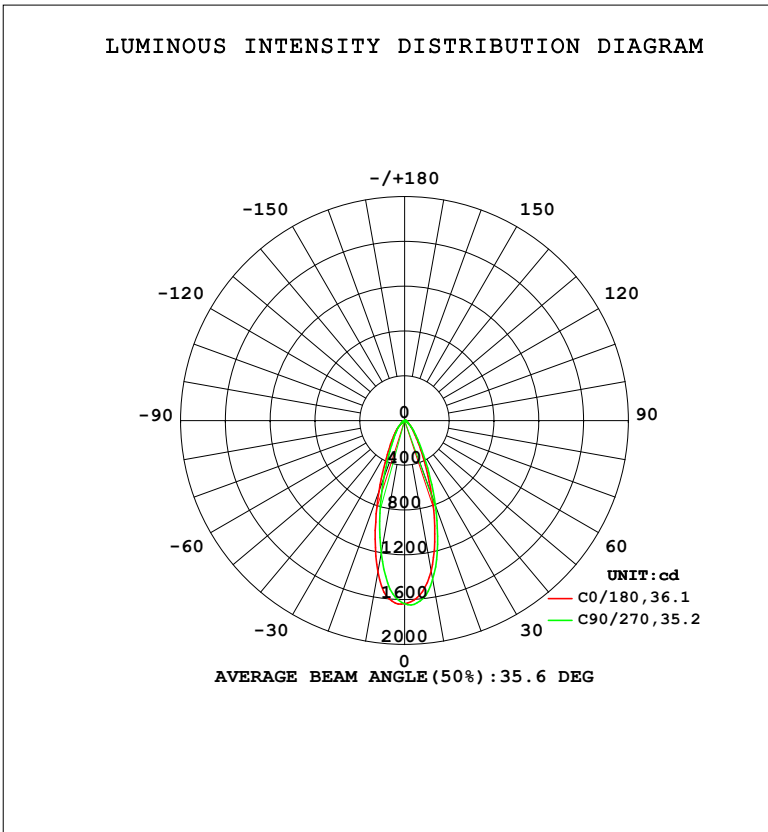

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1366	1431	1445	1417	1376	1247	1206	1300	0- 10	142.9	142.9	16.7,16.7
20	709.2	818.5	807.1	721.4	676.4	570.8	545.1	649.6	10- 20	278.4	421.3	49.4,49.4
30	274.9	323.4	319.1	283.3	265.4	228.2	215.8	252.3	20- 30	200.9	622.2	72.9,72.9
40	121.9	137.5	137.2	126.9	121.0	109.3	104.4	116.3	30- 40	113.4	735.6	86.2,86.2
50	59.13	62.23	54.46	46.63	42.83	41.62	43.78	53.80	40- 50	63.45	799.0	93.6,93.6
60	27.09	27.94	24.76	21.18	19.50	19.54	20.24	25.11	50- 60	31.62	830.6	97.3,97.3
70	10.70	11.33	9.264	7.005	6.126	6.147	7.159	8.989	60- 70	15.06	845.7	99.1,99.1
80	5.157	5.022	4.243	3.443	3.009	2.922	3.576	4.594	70- 80	6.092	851.8	99.8,99.8
90	0.0606	0.0573	0.1290	0.0532	0.0510	0.0492	0.0491	0.0366	80- 90	1.861	853.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 773.05 lm

%lum = 90.6%

%lamp = 90.6%

Conical surface Flux(130deg): 839.9 lm

%lum = 98.4%


%lamp = 98.4%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

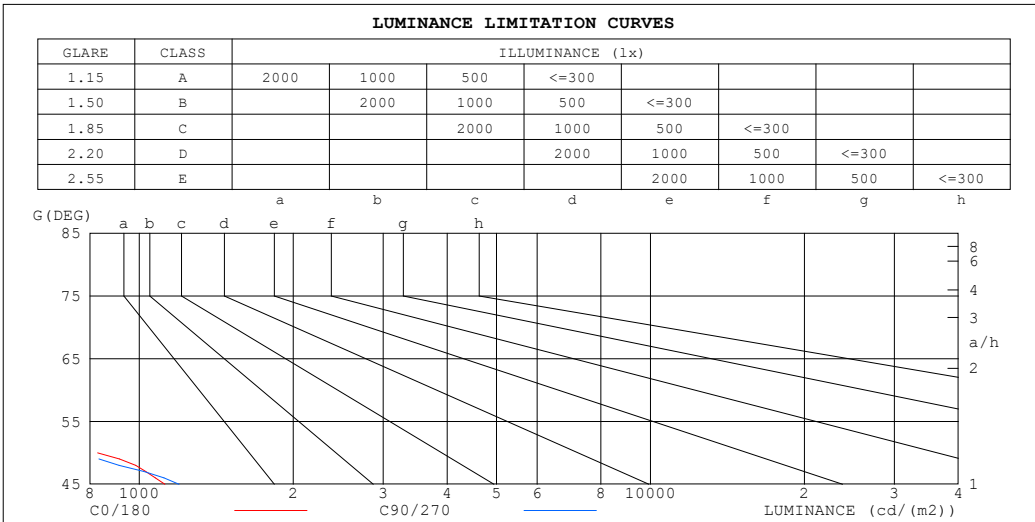

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	276	204
80	267	220
75	236	192
70	282	244
65	396	365
60	488	446
55	639	594
50	828	763
45	1121	1195


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.85	.80	.89	.84	.80	.87	.82	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.78	.74	.82	.77	.74	.80	.76	.73	.79	.75	.72	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.76	.70	.66	.75	.69	.66	.74	.69	.65	.73	.68	.65	.71	.68	.65	.63
8.0	.72	.66	.62	.71	.66	.62	.70	.65	.62	.69	.65	.61	.68	.64	.61	.60
9.0	.68	.63	.59	.68	.62	.59	.67	.62	.59	.66	.62	.58	.65	.61	.58	.57
10.0	.65	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.63	.58	.55	.54

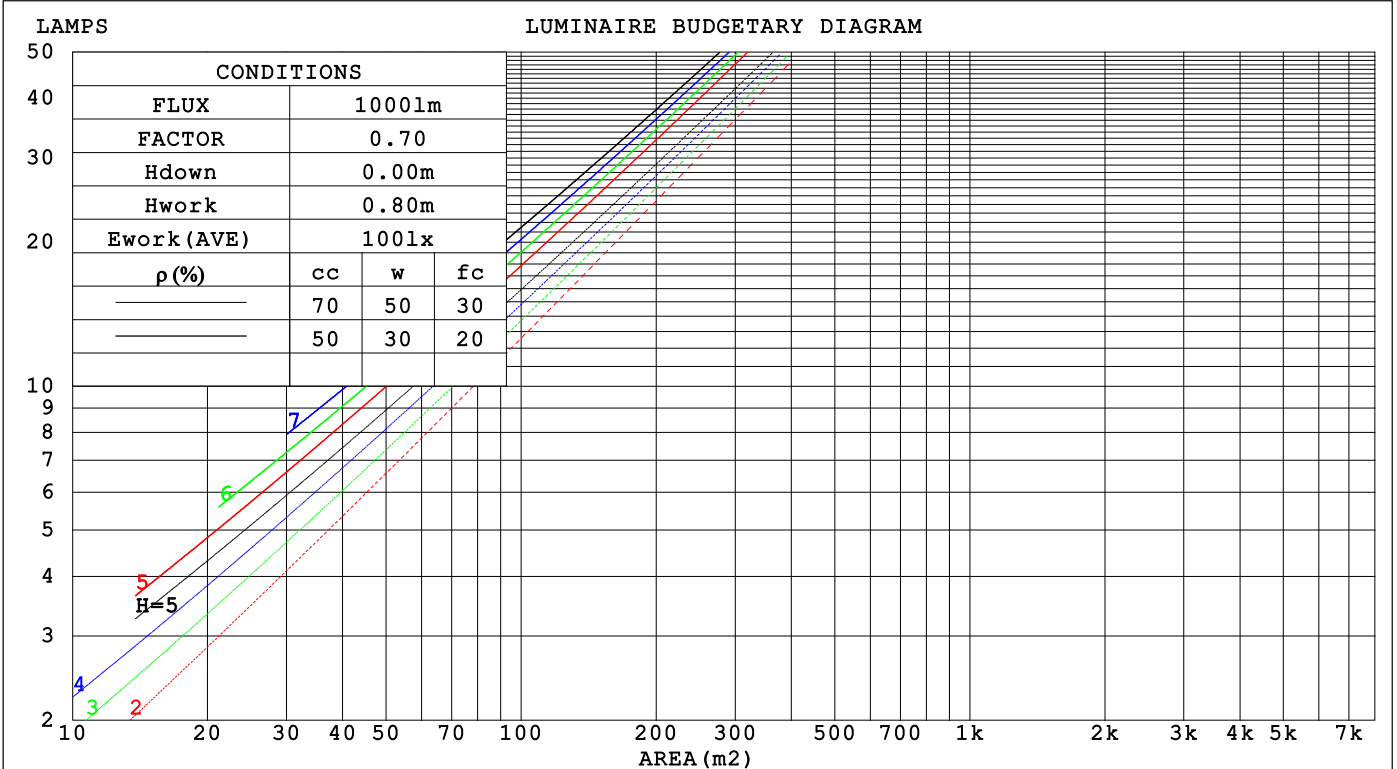

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.182	.103	.033	.175	.100	.032	.162	.093	.030	.151	.087	.028	.140	.081	.026	
2.0	.173	.095	.029	.167	.092	.028	.156	.087	.027	.147	.082	.026	.138	.078	.025	
3.0	.163	.087	.026	.158	.085	.026	.149	.081	.025	.141	.077	.024	.133	.074	.023	
4.0	.154	.080	.024	.150	.078	.023	.142	.075	.023	.135	.072	.022	.128	.070	.021	
5.0	.146	.074	.022	.142	.073	.021	.135	.070	.021	.129	.068	.020	.123	.066	.020	
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018	
7.0	.131	.065	.018	.128	.064	.018	.123	.062	.018	.118	.061	.018	.114	.059	.017	
8.0	.125	.061	.017	.122	.060	.017	.118	.059	.017	.113	.057	.017	.109	.056	.016	
9.0	.119	.058	.016	.117	.057	.016	.113	.056	.016	.109	.055	.016	.105	.053	.015	
10.0	.114	.055	.015	.112	.054	.015	.108	.053	.015	.104	.052	.015	.101	.051	.015	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.147	.135	.124	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.123	.098	.078	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.133	.099	.072	.114	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.124	.087	.060	.107	.075	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.095	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.104	.064	.036	.089	.055	.032	.062	.039	.023	.036	.023	.013	.012	.008	.004	
9.0	.099	.059	.032	.085	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.094	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	9.1	10.0	9.3	10.2	10.4	9.2	10.1	9.4	10.3	10.4
3H	9.3	10.2	9.6	10.4	10.6	9.4	10.2	9.6	10.4	10.6
4H	9.4	10.2	9.7	10.4	10.6	9.4	10.2	9.6	10.4	10.6
6H	9.5	10.2	9.8	10.5	10.7	9.4	10.2	9.7	10.4	10.7
8H	9.5	10.2	9.8	10.5	10.8	9.4	10.2	9.7	10.4	10.7
12H	9.5	10.3	9.9	10.5	10.8	9.4	10.1	9.7	10.4	10.7
4H 2H	9.2	10.0	9.5	10.2	10.4	9.2	10.1	9.5	10.3	10.5
3H	9.5	10.2	9.8	10.5	10.8	9.5	10.2	9.8	10.5	10.8
4H	9.6	10.3	10.0	10.6	10.9	9.6	10.2	9.9	10.5	10.8
6H	9.8	10.3	10.1	10.7	11.0	9.7	10.2	10.0	10.6	10.9
8H	9.9	10.4	10.2	10.7	11.1	9.7	10.3	10.1	10.6	11.0
12H	9.9	10.4	10.3	10.8	11.2	9.8	10.2	10.2	10.6	11.0
8H 4H	9.6	10.1	10.0	10.5	10.8	9.5	10.1	9.9	10.4	10.8
6H	9.8	10.3	10.3	10.7	11.1	9.7	10.2	10.2	10.6	11.0
8H	10.0	10.4	10.4	10.8	11.2	9.8	10.2	10.3	10.6	11.1
12H	10.1	10.5	10.6	10.9	11.4	9.9	10.3	10.4	10.7	11.2
12H 4H	9.6	10.0	10.0	10.4	10.8	9.5	10.0	9.9	10.4	10.8
6H	9.8	10.2	10.3	10.6	11.1	9.7	10.1	10.2	10.5	11.0
8H	10.0	10.3	10.5	10.8	11.3	9.9	10.2	10.3	10.6	11.1

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 1.1 / - 1.4	+ 1.2 / - 1.8
1.5H	+ 1.2 / - 1.1	+ 1.6 / - 1.5
2.0H	+ 2.1 / - 1.4	+ 2.5 / - 1.7

CIE Pub.117, 853.6 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	83	76	71	82	75	71	81	75	71	67
0.80	91	84	80	90	84	80	89	83	79	75
1.00	96	90	86	95	89	85	93	89	85	80
1.25	101	95	91	99	94	90	97	93	90	85
1.50	104	98	94	102	97	94	100	96	93	88
2.00	107	102	99	105	101	98	103	99	96	91
2.50	109	105	101	107	103	100	104	101	98	92
3.00	111	107	104	109	105	103	105	103	100	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

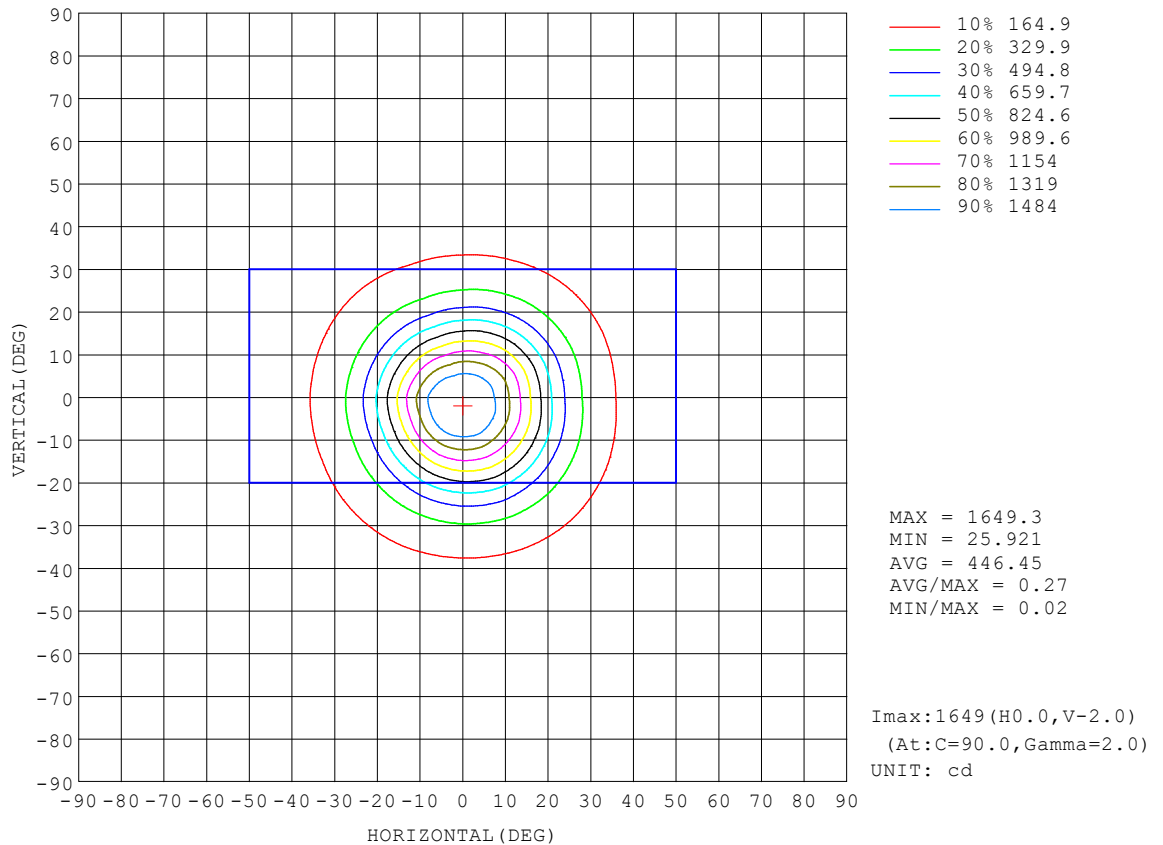


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

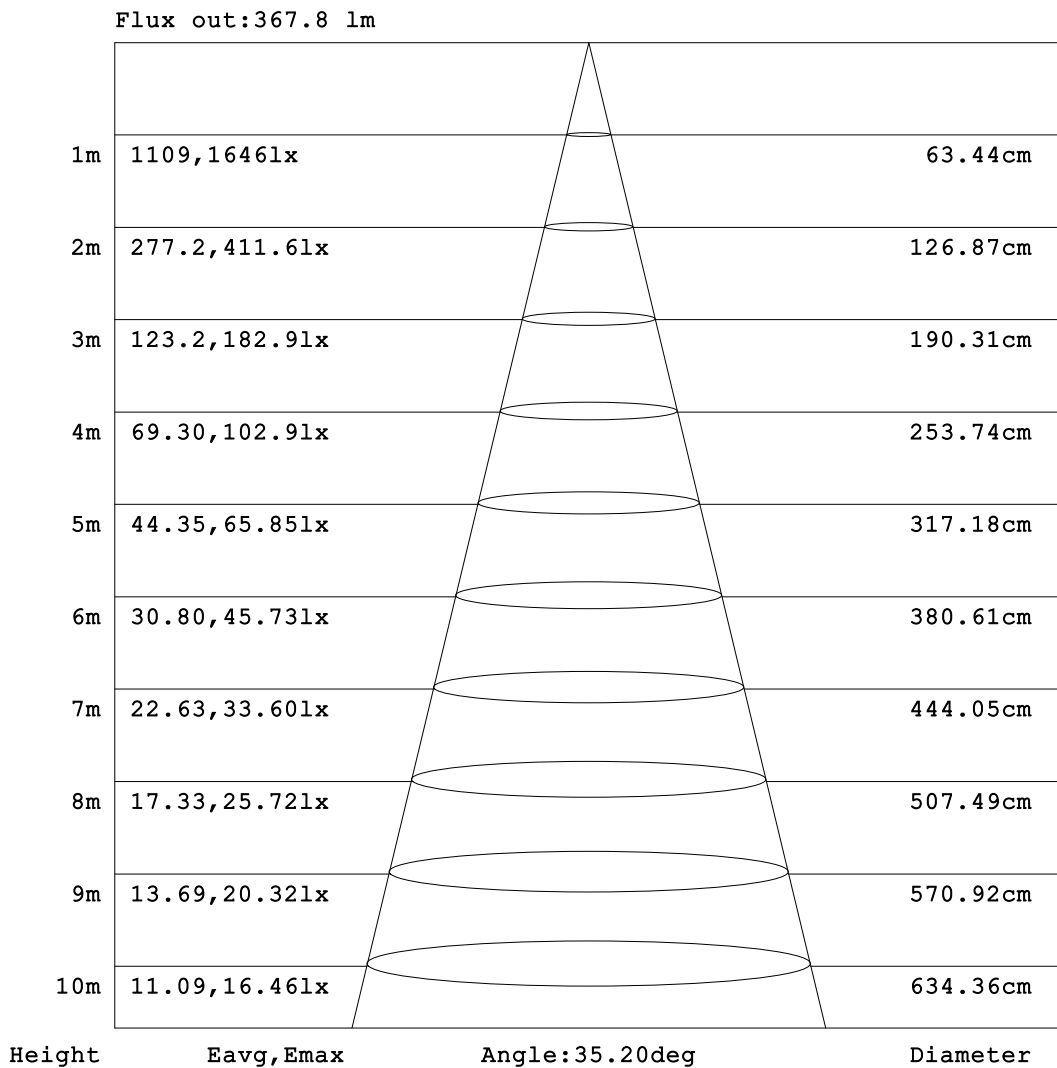


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3°C
Operators:
Test Date:2024-08-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.080m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

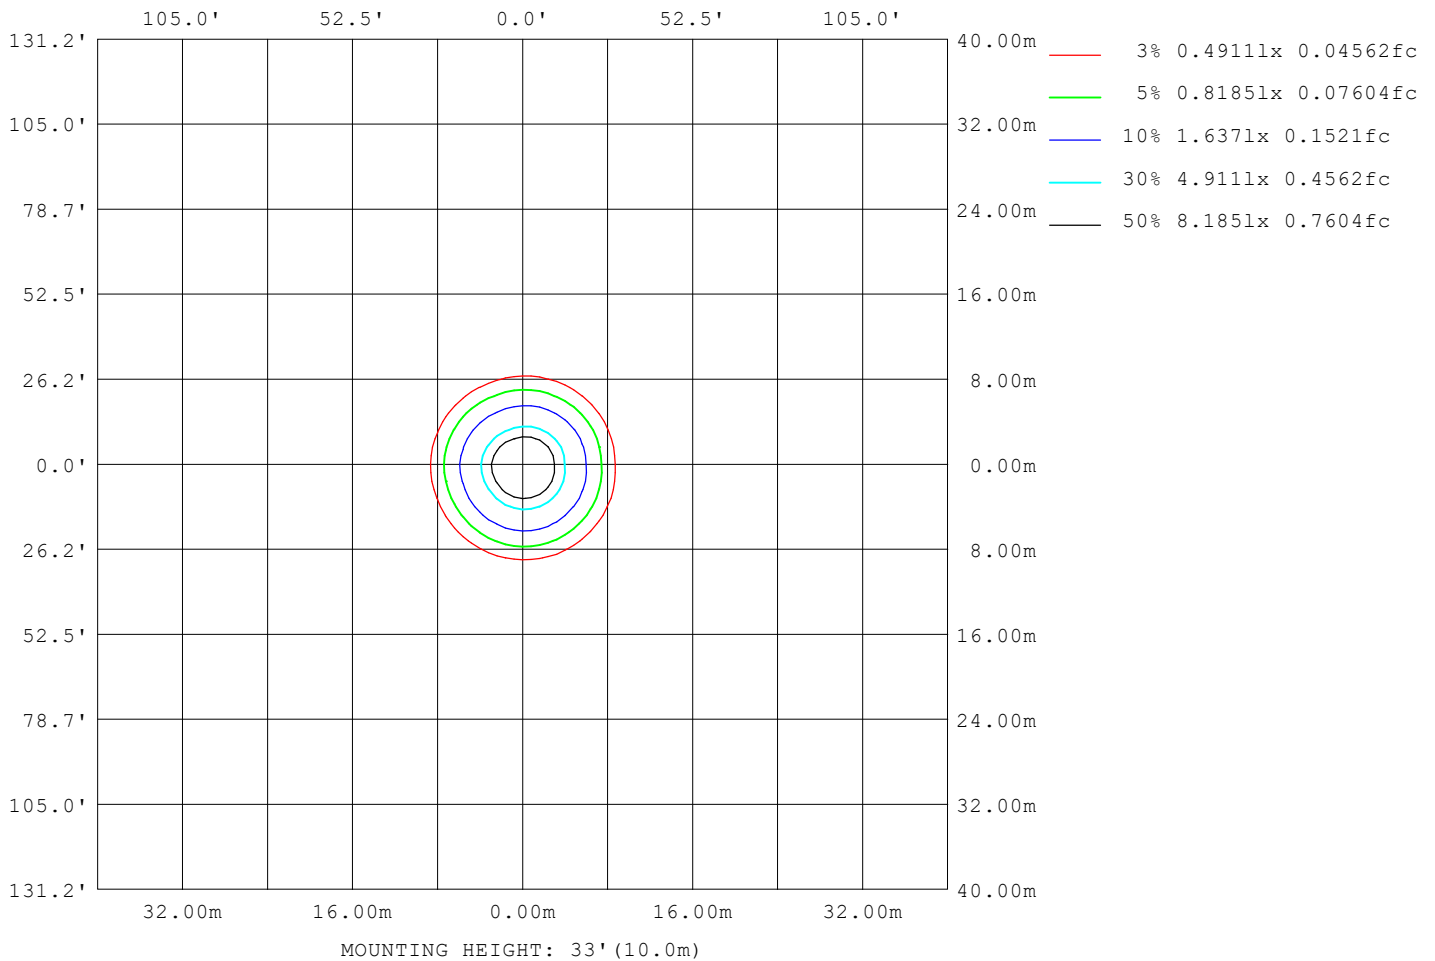

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	321
L_0~180 (75) av	200
L_0~180 (85) av	196
L_90~270 (65) av	317
L_90~270 (75) av	193
L_90~270 (85) av	173
L_45 (65) av	324
L_45 (75) av	196
L_45 (85) av	184

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks:

Planar Illuminance Curve

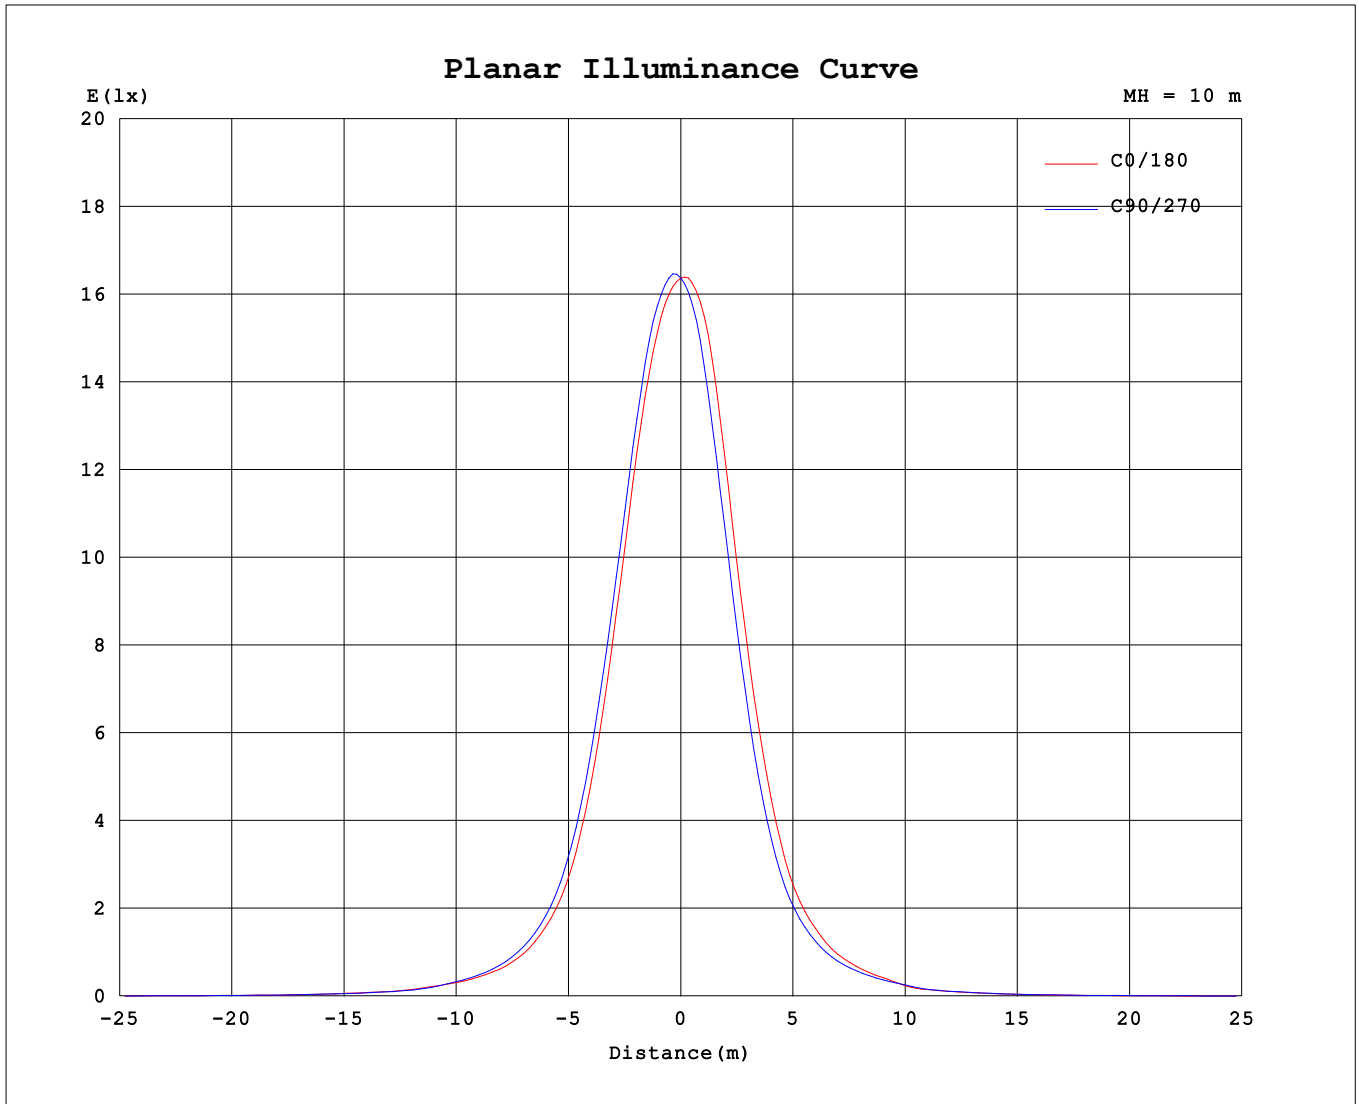

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.080m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.25V I:0.0924A P:10.827W PF:0.9747 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:853.65x1 lm		
NAME: LED-2-S11W-DTW-WH-EY-SQ	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: LTS	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1636	1636	1636	1636	1636	1636	1636	1636	1636	1636	1636	1636	1636	1636	1636	1636			
5	1564	1589	1603	1617	1616	1618	1609	1602	1599	1567	1535	1505	1510	1522	1539	1558			
10	1366	1407	1431	1457	1445	1444	1417	1379	1376	1304	1247	1199	1206	1241	1300	1354			
15	1048	1110	1141	1158	1142	1121	1068	1023	1016	944	890	840	856	909	980	1040			
20	709	777	819	834	807	774	721	679	676	618	571	531	545	593	650	700			
25	442	490	524	539	517	491	453	422	417	379	349	323	333	363	401	435			
30	275	305	323	329	319	302	283	267	265	246	228	212	216	230	252	271			
35	177	197	206	210	206	198	185	174	175	165	156	144	146	152	164	175			
40	122	132	138	140	137	134	127	122	121	115	109	102	104	109	116	121			
45	88.1	94.3	96.4	97.5	93.9	89.0	79.8	71.2	67.1	63.9	64.2	65.3	72.6	78.7	83.8	87.9			
50	59.1	63.0	62.2	59.7	54.5	50.1	46.6	44.2	42.8	41.7	41.6	41.2	43.8	48.0	53.8	57.5			
55	40.7	42.0	41.9	40.5	37.8	35.4	32.4	30.3	29.5	28.8	29.0	28.7	30.8	34.5	38.0	40.0			
60	27.1	28.0	27.9	26.9	24.8	23.1	21.2	20.0	19.5	19.2	19.5	19.4	20.2	22.8	25.1	26.5			
65	18.6	19.2	19.3	18.7	17.1	15.3	13.5	12.2	11.6	11.1	11.1	11.4	12.6	14.8	16.8	18.1			
70	10.7	11.2	11.3	10.8	9.26	7.90	7.00	6.47	6.13	5.98	6.15	6.44	7.16	8.01	8.99	9.72			
75	6.80	6.63	6.33	5.99	5.53	5.23	5.00	4.90	4.70	4.68	4.82	5.06	5.55	6.02	6.38	6.50			
80	5.16	5.19	5.02	4.71	4.24	3.81	3.44	3.21	3.01	2.86	2.92	3.09	3.58	4.11	4.59	4.86			
85	2.67	2.93	3.04	2.51	1.97	1.51	0.98	1.13	1.12	0.93	0.81	0.98	1.38	1.86	2.29	1.95			
90	0.06	0.08	0.06	0.10	0.13	0.06	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.04	0.04	0.22			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-08-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.080m [K=1.0000]
 Remarks: