
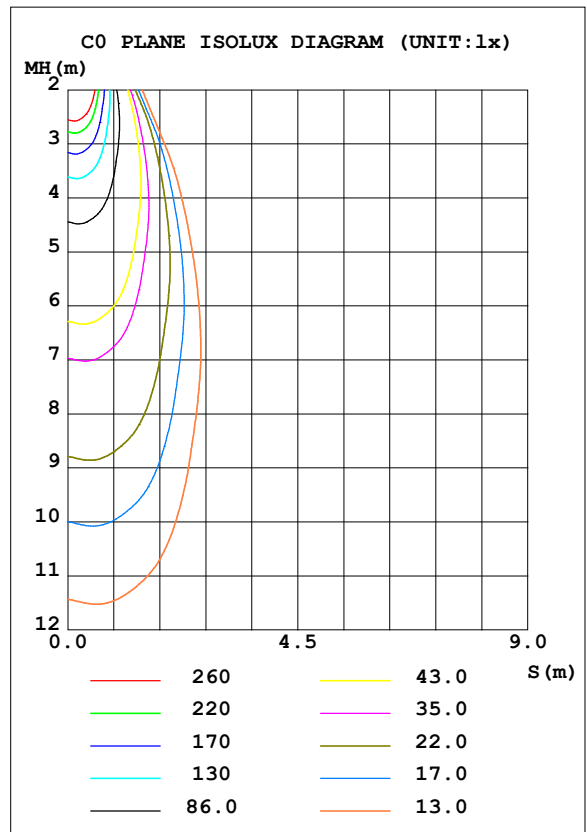


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME: LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 62.56 lm/W			
MODEL		Imax (cd)	1713	S/MH (C0/180)	0.58
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.65
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	822.50	<input type="checkbox"/> UP, DN (C0-180)	0.0, 47.7
NOMINAL FLUX (lm)	822.505	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 52.3
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

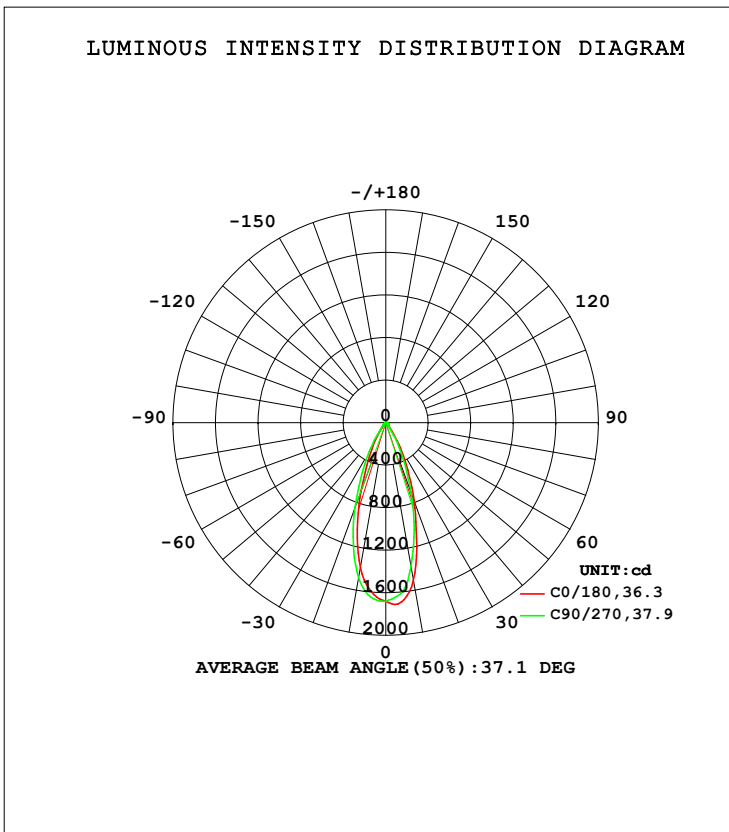

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1505	1470	1369	1427	1385	1393	1479	1481	0- 10	150.1	150.1	18.2,18.2
20	787.6	749.5	695.3	701.8	679.8	809.4	846.2	864.1	10- 20	303.0	453.1	55.1,55.1
30	276.7	236.4	223.9	227.8	224.4	335.3	316.2	352.7	20- 30	219.1	672.1	81.7,81.7
40	59.60	53.85	52.62	55.00	54.19	68.00	67.12	67.63	30- 40	79.83	752.0	91.4,91.4
50	31.68	31.66	31.90	32.48	31.25	31.78	30.96	30.79	40- 50	32.74	784.7	95.4,95.4
60	16.89	17.02	17.45	17.71	16.61	15.66	13.99	15.56	50- 60	20.77	805.5	97.9,97.9
70	8.838	9.062	8.199	8.891	8.698	6.704	5.210	6.560	60- 70	11.71	817.2	99.4,99.4
80	3.317	2.245	1.248	2.002	3.196	1.135	0.4263	0.9453	70- 80	4.804	822.0	99.9,99.9
90	0.0237	0.0199	0.0184	0.0155	0.0323	0.0256	0.0274	0.0367	80- 90	0.4992	822.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:



LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	62	9
80	174	65
75	204	149
70	235	215
65	270	273
60	308	313
55	373	367
50	449	446
45	528	519


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.92	.90	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.91	.89	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.86	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.79
5.0	.87	.82	.78	.86	.81	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.77	.74	.82	.77	.73	.81	.76	.73	.79	.75	.72	.78	.75	.72	.71
7.0	.79	.73	.70	.78	.73	.69	.77	.72	.69	.76	.72	.69	.75	.71	.68	.67
8.0	.75	.70	.66	.75	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.65	.64
9.0	.72	.67	.63	.71	.66	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.61
10.0	.69	.64	.60	.68	.64	.60	.68	.63	.60	.67	.63	.60	.66	.62	.60	.59

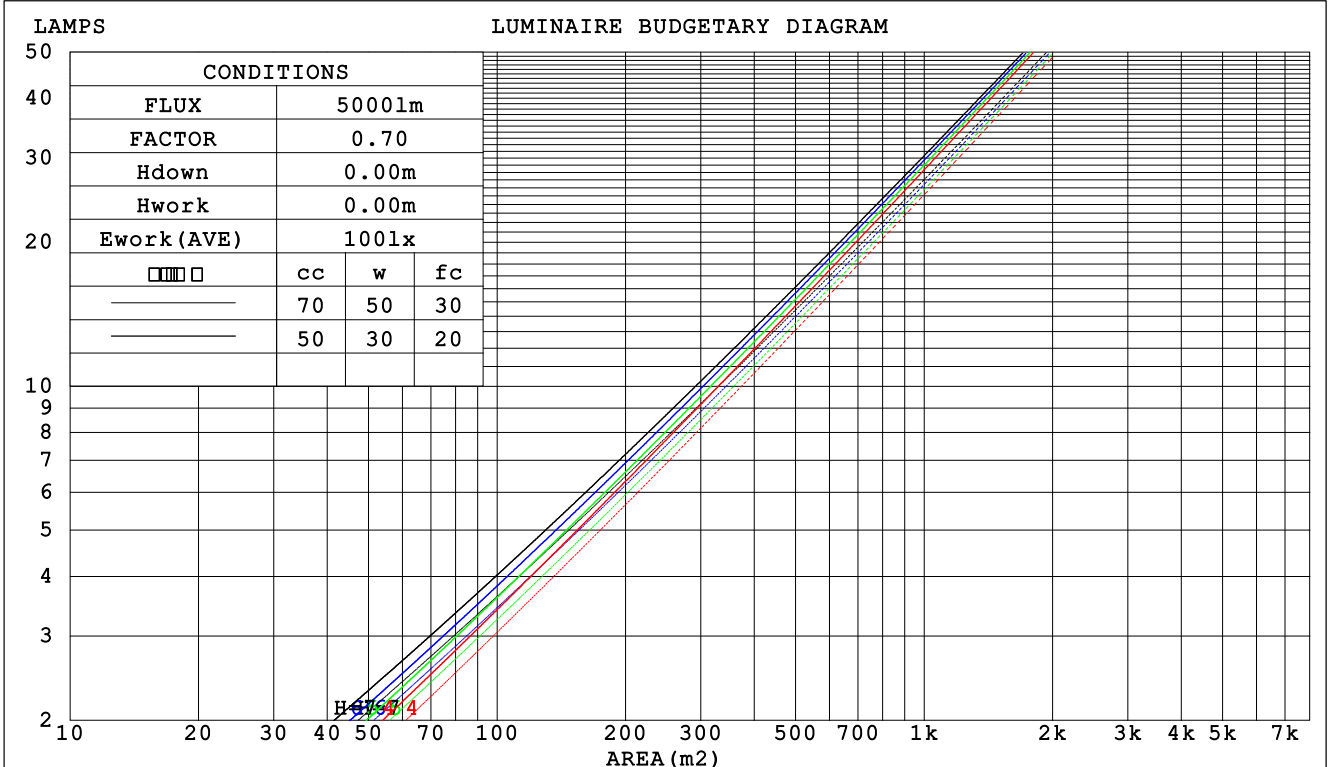

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME: LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.170	.096	.031	.163	.093	.030	.150	.086	.028	.139	.080	.026	.128	.074	.024	
2.0	.161	.088	.027	.155	.085	.026	.145	.080	.025	.135	.076	.024	.126	.071	.022	
3.0	.152	.081	.024	.147	.079	.024	.138	.075	.023	.130	.071	.022	.122	.068	.021	
4.0	.143	.074	.022	.139	.073	.022	.131	.070	.021	.124	.067	.020	.118	.064	.019	
5.0	.135	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.113	.061	.018	
6.0	.129	.064	.018	.125	.063	.018	.120	.061	.018	.114	.059	.017	.109	.058	.017	
7.0	.122	.060	.017	.120	.060	.017	.114	.058	.017	.110	.056	.016	.105	.055	.016	
8.0	.117	.057	.016	.114	.056	.016	.110	.055	.016	.105	.053	.015	.101	.052	.015	
9.0	.111	.054	.015	.109	.053	.015	.105	.052	.015	.101	.051	.015	.098	.050	.014	
10.0	.107	.051	.014	.105	.051	.014	.101	.050	.014	.098	.049	.014	.094	.048	.014	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.113	.091	.121	.098	.079	.083	.068	.055	.048	.040	.033	.015	.013	.011	
4.0	.131	.099	.074	.112	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.121	.087	.061	.104	.075	.053	.072	.052	.038	.042	.031	.022	.013	.010	.007	
6.0	.113	.077	.051	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.044	.092	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.100	.063	.038	.086	.055	.033	.060	.038	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.033	.082	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.090	.053	.029	.078	.046	.025	.054	.033	.018	.032	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm										
NAME:LED-2-S15W-L5CCTWH-T					TYPE:			WEIGHT:		
SPEC.:2700K 90					DIM.:			SERIAL No.:		
MFR.:					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.2	6.0	5.4	6.2	6.3	4.8	5.7	5.1	5.9	6.0
3H	5.8	6.6	6.0	6.8	7.0	5.5	6.3	5.7	6.4	6.6
4H	6.0	6.8	6.3	7.0	7.2	5.6	6.4	5.9	6.6	6.8
6H	6.1	6.9	6.4	7.1	7.3	5.6	6.3	5.9	6.5	6.8
8H	6.1	6.8	6.4	7.1	7.3	5.5	6.2	5.9	6.5	6.7
12H	6.1	6.8	6.4	7.0	7.3	5.5	6.2	5.8	6.4	6.7
4H 2H	5.4	6.1	5.7	6.4	6.6	5.1	5.9	5.4	6.1	6.3
3H	6.1	6.8	6.5	7.1	7.3	5.9	6.5	6.2	6.8	7.1
4H	6.5	7.1	6.8	7.4	7.7	6.1	6.7	6.4	7.0	7.3
6H	6.7	7.2	7.1	7.6	7.9	6.1	6.6	6.5	6.9	7.3
8H	6.7	7.2	7.1	7.6	7.9	6.0	6.5	6.4	6.9	7.3
12H	6.7	7.1	7.1	7.5	7.9	6.0	6.4	6.4	6.8	7.2
8H 4H	6.5	7.0	6.9	7.4	7.7	6.1	6.6	6.5	7.0	7.3
6H	6.8	7.2	7.2	7.6	8.0	6.2	6.6	6.6	7.0	7.4
8H	6.8	7.2	7.3	7.6	8.0	6.1	6.5	6.6	6.9	7.3
12H	6.8	7.1	7.3	7.6	8.0	6.1	6.4	6.5	6.8	7.3
12H 4H	6.5	6.9	6.9	7.3	7.7	6.1	6.5	6.5	6.9	7.3
6H	6.8	7.1	7.2	7.5	8.0	6.1	6.5	6.6	6.9	7.4
8H	6.8	7.1	7.3	7.5	8.0	6.1	6.4	6.6	6.8	7.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 0.8					+ 0.6 / - 0.8				
1.5H	+ 1.2 / - 0.4					+ 0.5 / - 0.5				
2.0H	+ 0.9 / - 0.8					+ 1.1 / - 0.8				

CIE Pub.117, 822.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.7)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	79	76	85	79	76	72
0.80	94	88	84	93	87	84	92	87	83	79
1.00	98	92	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

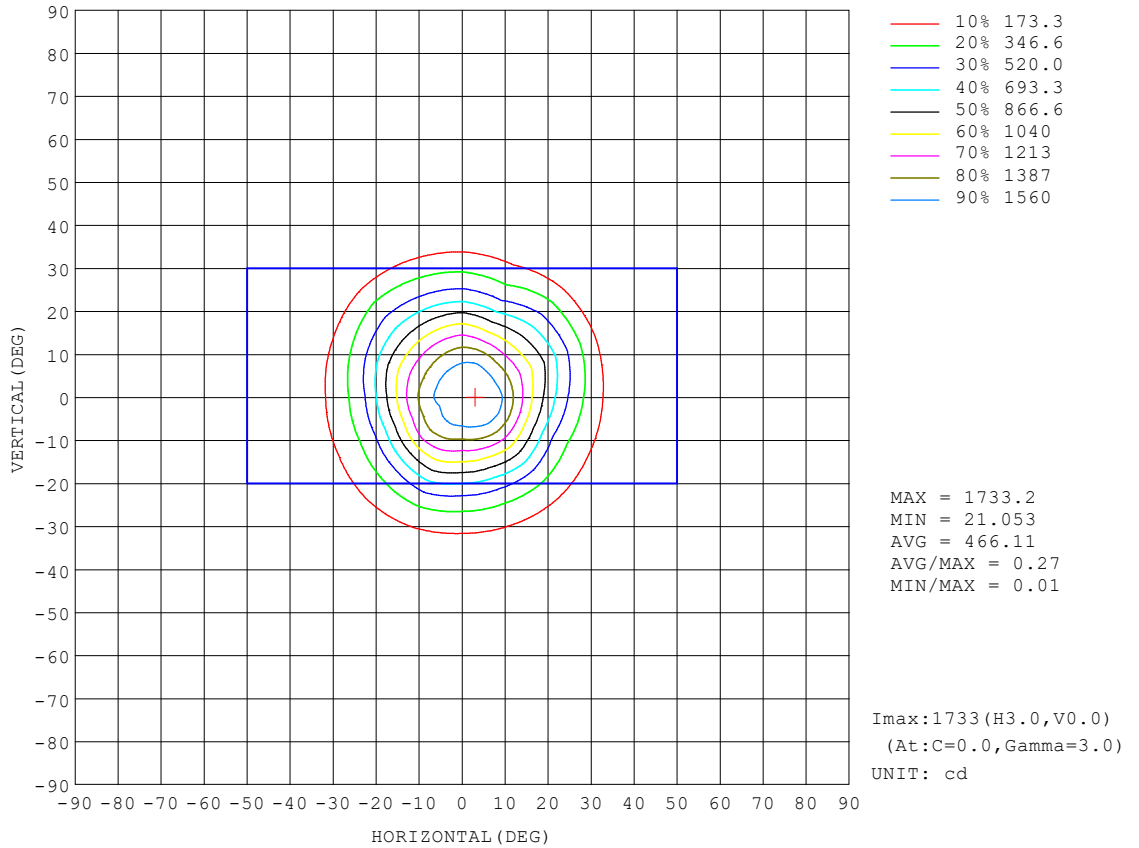


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

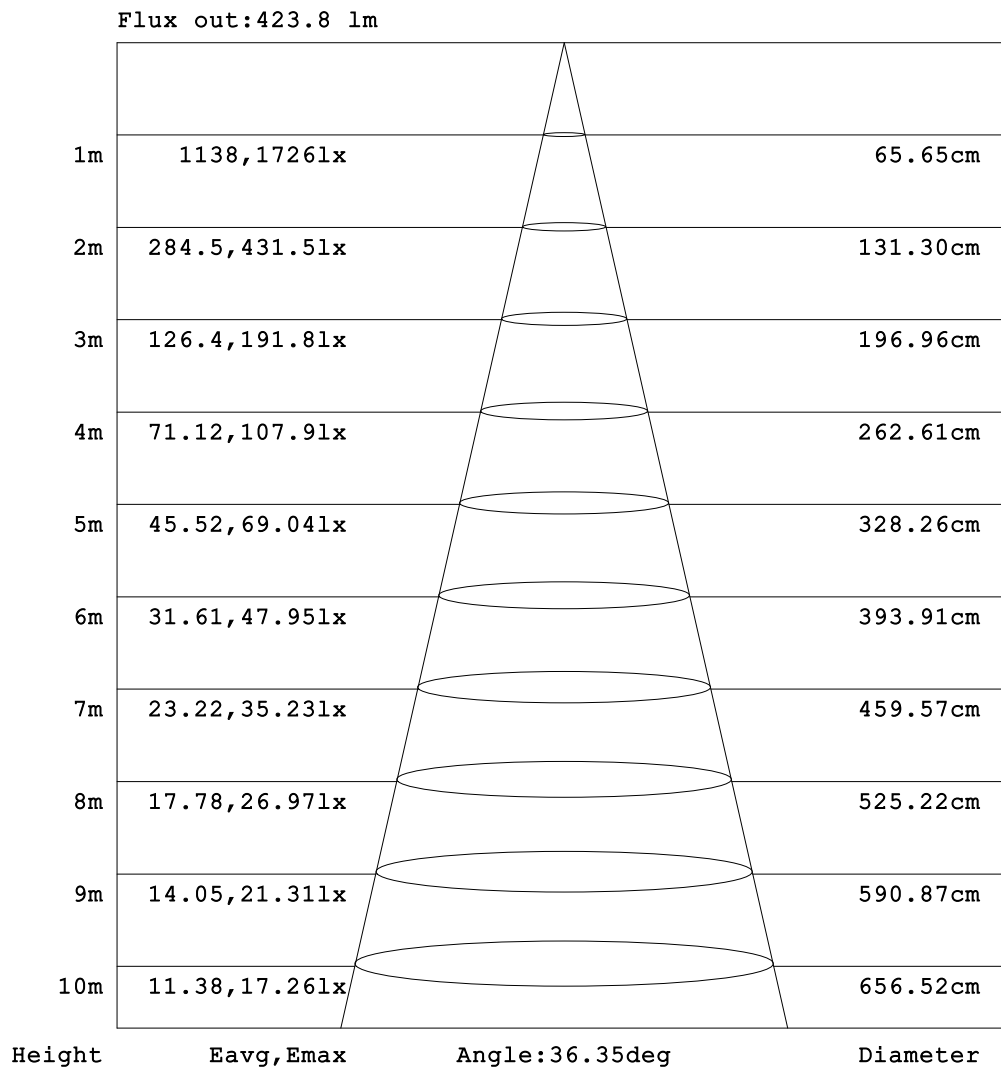


**Note:**The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME: LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

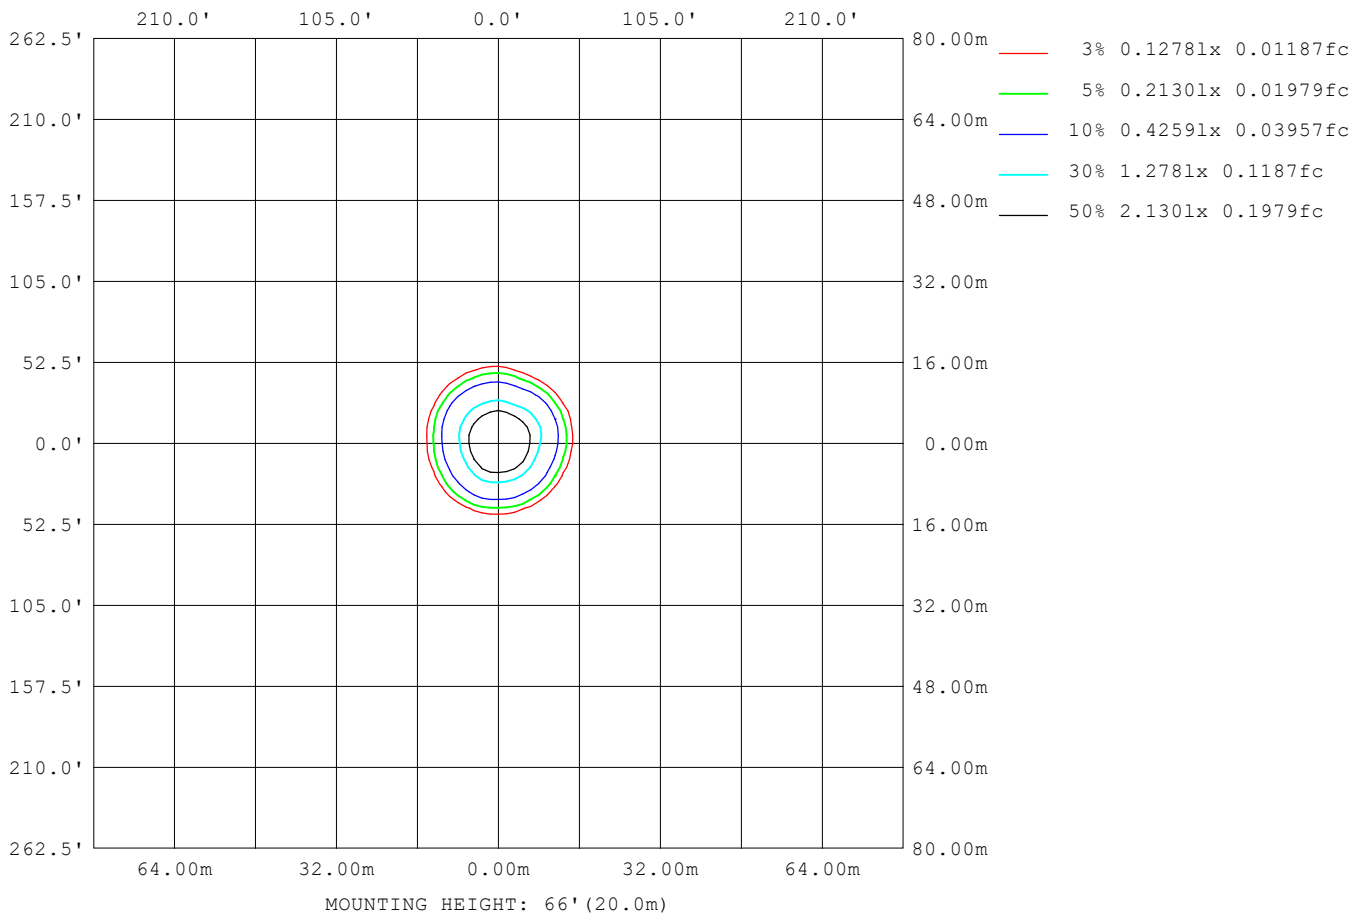

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME: LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	265
L_0~180 (75) av	199
L_0~180 (85) av	67
L_90~270 (65) av	233
L_90~270 (75) av	116
L_90~270 (85) av	8
L_45 (65) av	252
L_45 (75) av	151
L_45 (85) av	8

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

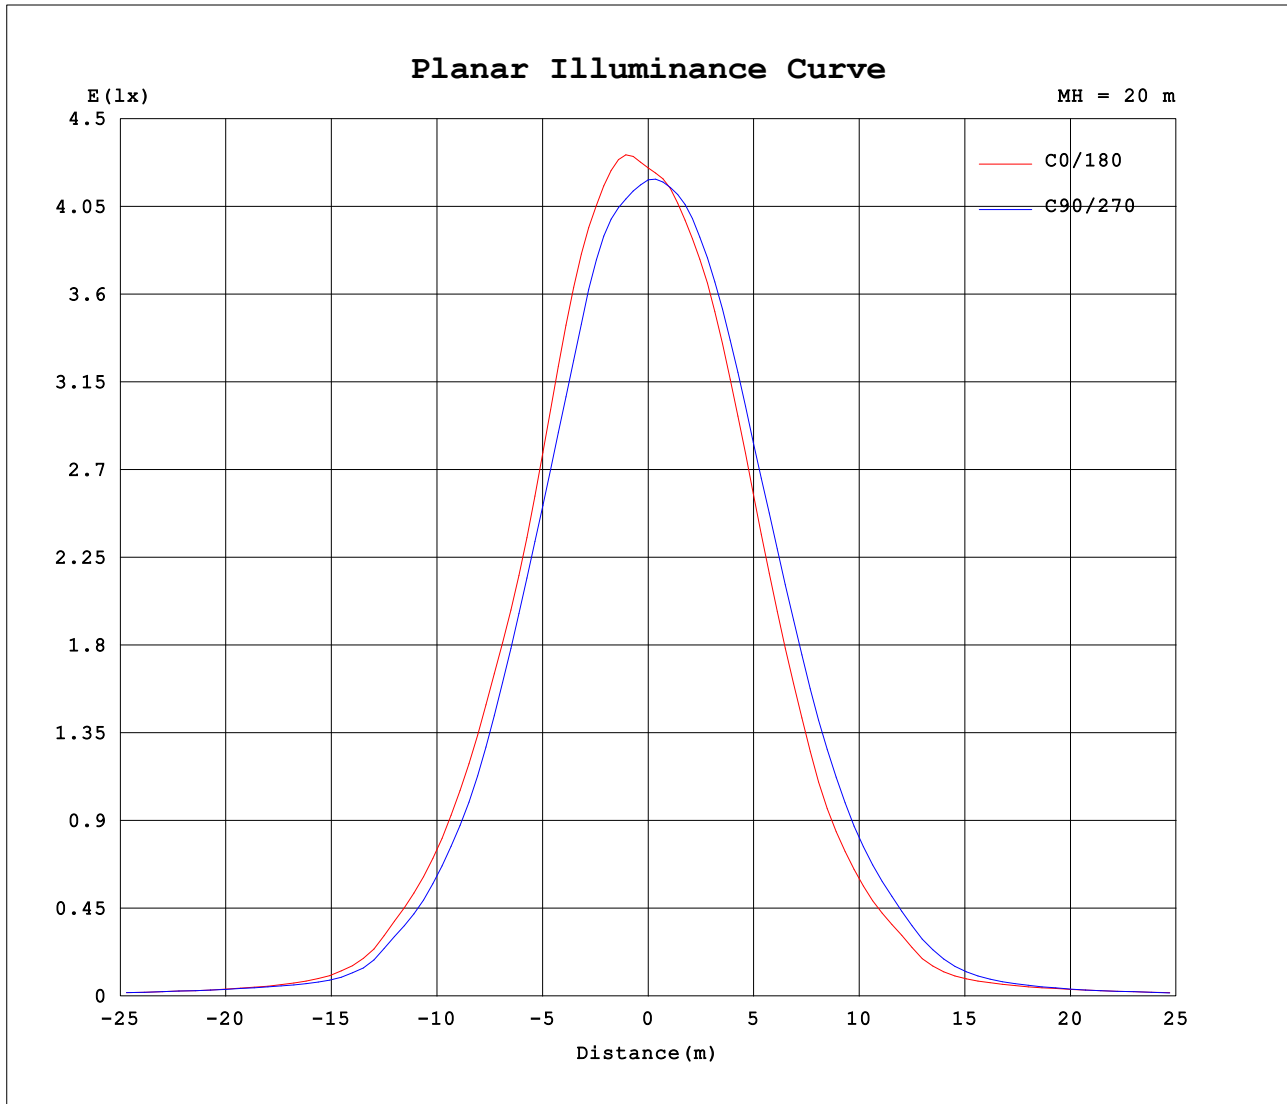

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**LUMINOUS DISTRIBUTION INTENSITY DATA**

Test:U:120.05V I:0.1111A P:13.148W PF:0.9477 Freq:59.98Hz Lamp Flux:822.505x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:2700K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1679	1679	1679	1679	1679	1679	1679	1679	1679	1679	1679	1679	1679	1679	1679	1679			
5	1693	1680	1660	1636	1616	1611	1603	1591	1591	1597	1608	1627	1647	1659	1671	1690			
10	1505	1506	1470	1413	1369	1409	1427	1397	1385	1376	1393	1432	1479	1495	1481	1499			
15	1125	1101	1108	1047	1038	1095	1083	1026	1039	1099	1115	1147	1182	1138	1150	1195			
20	788	711	750	696	695	758	702	650	680	775	809	827	846	787	864	914			
25	493	406	437	410	414	453	403	377	394	477	546	535	534	480	597	618			
30	277	234	236	225	224	239	228	215	224	276	335	325	316	273	353	346			
35	113	93.9	92.5	87.1	88.0	93.0	98.6	90.3	90.8	110	138	142	140	114	139	137			
40	59.6	54.5	53.9	53.6	52.6	53.5	55.0	53.8	54.2	60.2	68.0	70.5	67.1	60.9	67.6	66.7			
45	41.0	40.2	40.2	40.4	40.9	42.3	42.3	40.1	39.8	40.7	42.2	42.2	41.7	40.9	42.5	42.0			
50	31.7	31.7	31.7	31.7	31.9	32.2	32.5	31.5	31.3	31.3	31.8	31.3	31.0	30.5	30.8	31.4			
55	23.5	23.4	23.1	23.2	23.5	23.9	24.2	23.2	22.8	22.8	22.9	21.3	21.2	21.2	22.6	23.3			
60	16.9	17.1	17.0	17.2	17.4	17.7	17.7	17.0	16.6	16.4	15.7	14.4	14.0	14.2	15.6	16.7			
65	12.5	12.8	12.8	13.0	12.8	12.9	13.2	12.7	12.3	11.9	10.8	9.49	9.00	9.19	10.6	12.2			
70	8.84	9.08	9.06	8.62	8.20	8.33	8.89	9.08	8.70	8.00	6.70	5.61	5.21	5.34	6.56	8.25			
75	5.79	5.98	5.40	4.72	4.29	4.47	5.12	5.73	5.69	4.76	3.54	2.69	2.38	2.45	3.36	4.83			
80	3.32	3.15	2.24	1.57	1.25	1.40	2.00	2.84	3.20	2.15	1.13	0.58	0.43	0.43	0.95	2.04			
85	0.59	0.77	0.08	0.09	0.09	0.07	0.06	0.66	0.71	0.35	0.07	0.07	0.07	0.07	0.09	0.29			
90	0.02	0.02	0.02	0.02	0.02	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.03			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-19  
 □ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks: