
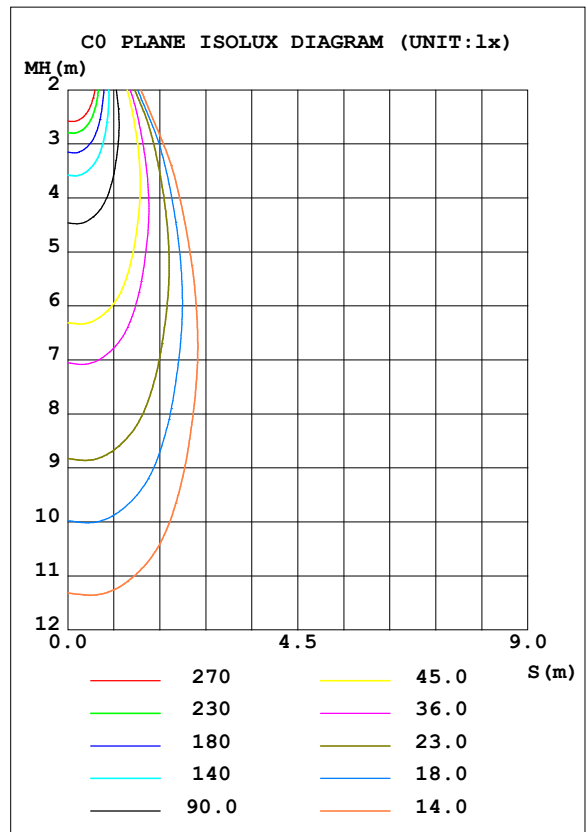


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 66.95 lm/W			
MODEL		Imax (cd)	1801	S/MH (C0/180)	0.60
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	0.63
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	867.39	<input type="checkbox"/> UP, DN (C0-180)	0.0, 48.4
NOMINAL FLUX (lm)	867.386	CIE CLASS	DIRECT	<input type="checkbox"/> UP, DN (C180-360)	0.0, 51.6
LAMPS INSIDE	1	<input type="checkbox"/> up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	<input type="checkbox"/> down (%)	100.0	CIBSE SHR MAX	0.65

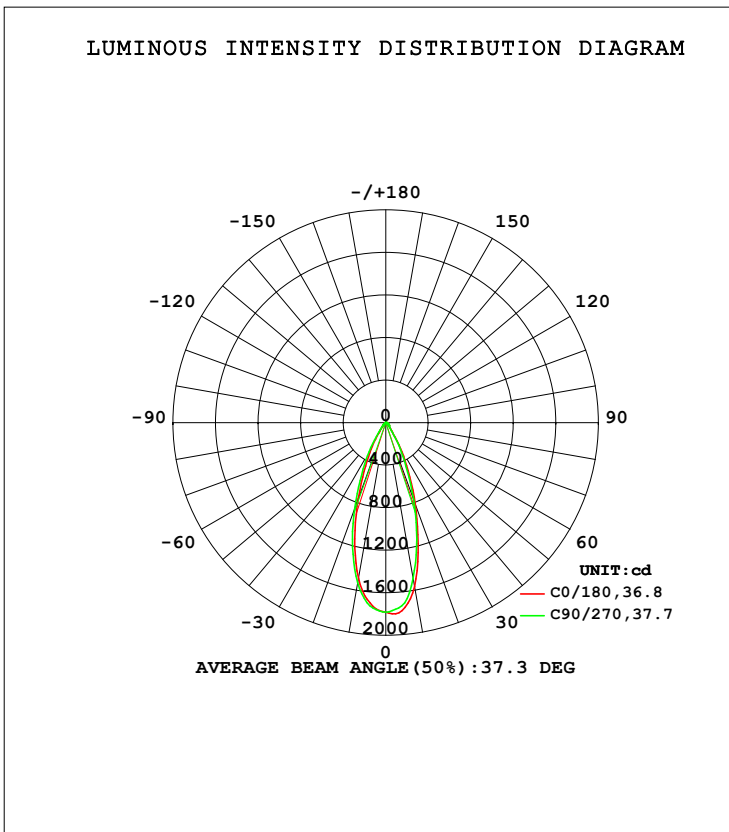

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**

ZONAL FLUX DIAGRAM:


mm	C0	C45	C90	C135	C180	C225	C270	C315	mm	□ zone	□ total	%lum, lamp
10	1565	1544	1488	1525	1485	1483	1526	1530	0- 10	158.7	158.7	18.3,18.3
20	817.1	789.1	765.2	778.4	759.7	847.7	856.0	870.5	10- 20	320.4	479.1	55.2,55.2
30	282.2	253.0	247.1	255.9	257.7	341.0	317.4	337.4	20- 30	231.2	710.3	81.9,81.9
40	61.06	56.69	56.25	59.43	59.04	69.80	67.32	67.29	30- 40	83.38	793.7	91.5,91.5
50	32.95	33.32	33.93	34.36	32.84	33.14	31.71	31.87	40- 50	34.23	827.9	95.4,95.4
60	17.59	17.97	18.58	18.75	17.45	16.26	14.28	16.14	50- 60	21.76	849.7	98,98
70	9.215	9.561	8.535	9.256	9.130	6.938	5.256	6.802	60- 70	12.24	861.9	99.4,99.4
80	3.448	2.349	1.283	2.065	3.355	1.152	0.3778	0.9392	70- 80	4.973	866.9	99.9,99.9
90	0.0256	0.0196	0.0177	0.0147	0.0315	0.0293	0.0283	0.0402	80- 90	0.5099	867.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

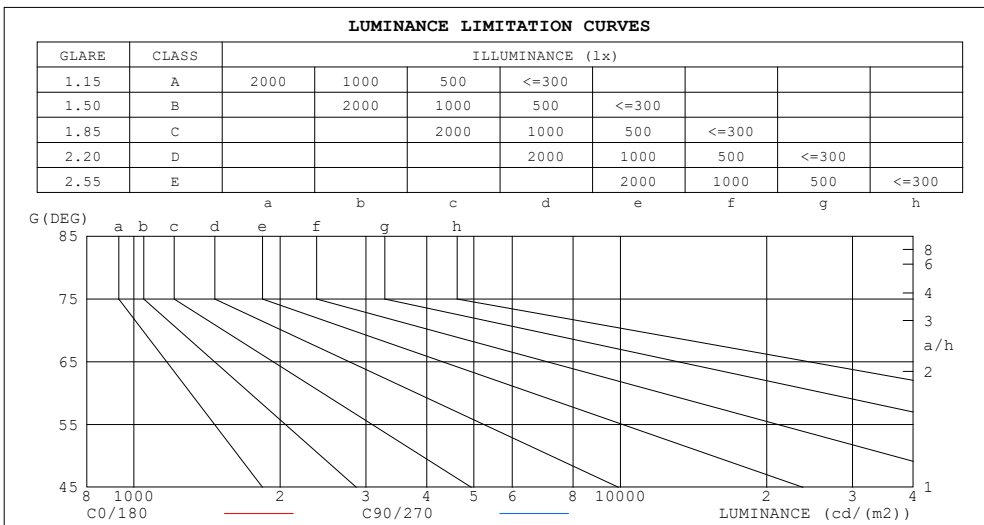

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	63	9
80	180	67
75	211	155
70	244	225
65	280	287
60	318	335
55	384	396
50	464	476
45	544	554


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

□cc	80%			70%			50%			30%			10%			0
□w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
□fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.00	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.94	.92	.90	.88
3.0	.98	.93	.90	.96	.92	.89	.94	.90	.87	.92	.89	.86	.89	.87	.85	.83
4.0	.92	.87	.83	.91	.87	.83	.89	.85	.82	.87	.84	.81	.85	.82	.80	.79
5.0	.87	.82	.78	.86	.82	.78	.85	.80	.77	.83	.79	.76	.82	.78	.76	.74
6.0	.83	.78	.74	.82	.77	.73	.81	.76	.73	.79	.75	.72	.78	.75	.72	.71
7.0	.79	.74	.70	.78	.73	.70	.77	.73	.69	.76	.72	.69	.75	.71	.69	.67
8.0	.75	.70	.66	.75	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.65	.64
9.0	.72	.67	.63	.72	.66	.63	.71	.66	.63	.70	.66	.63	.69	.65	.62	.61
10.0	.69	.64	.60	.69	.64	.60	.68	.63	.60	.67	.63	.60	.66	.63	.60	.59

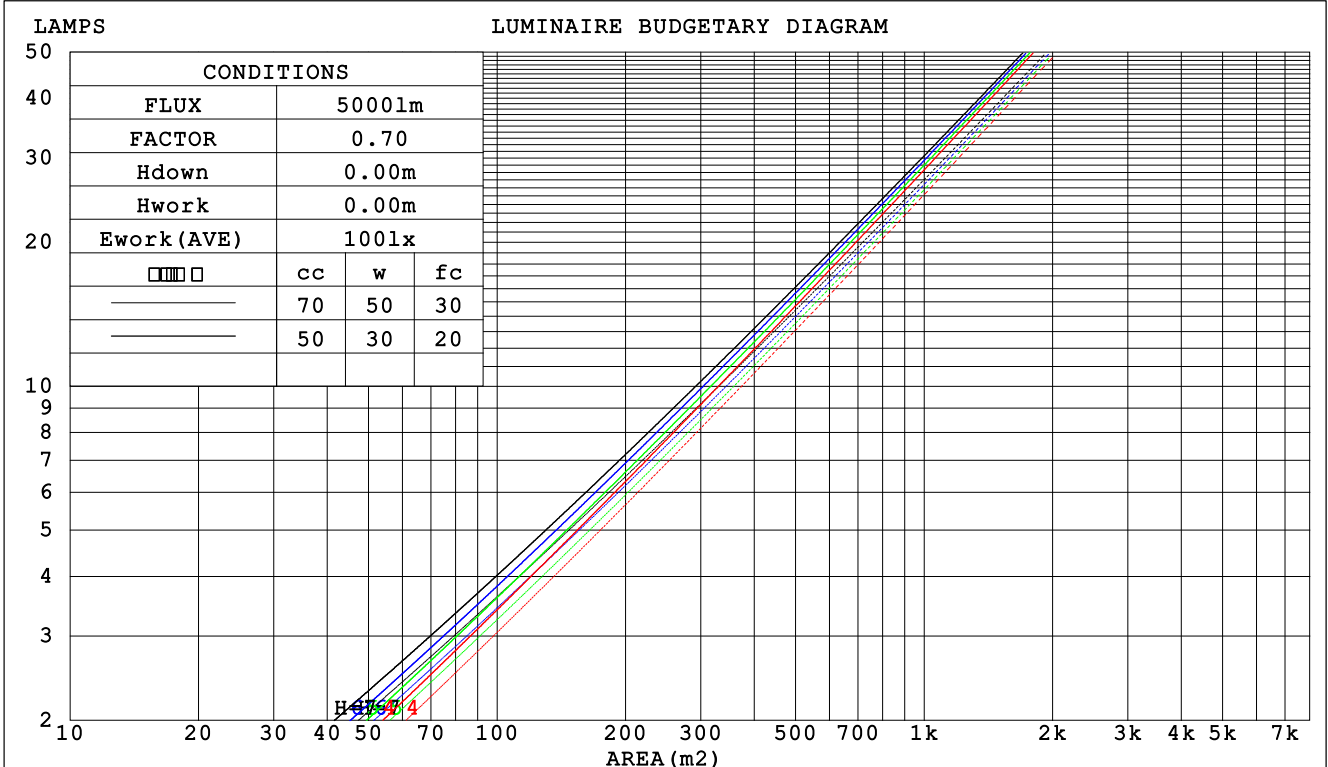

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.169	.096	.031	.163	.093	.029	.150	.086	.028	.139	.080	.026	.128	.074	.024	
2.0	.161	.088	.027	.155	.085	.026	.144	.080	.025	.135	.076	.024	.126	.071	.022	
3.0	.151	.081	.024	.147	.079	.024	.138	.075	.023	.130	.071	.022	.122	.067	.021	
4.0	.143	.074	.022	.139	.073	.021	.131	.070	.021	.124	.067	.020	.118	.064	.019	
5.0	.135	.069	.020	.132	.068	.020	.125	.065	.019	.119	.063	.019	.113	.060	.018	
6.0	.128	.064	.018	.125	.063	.018	.119	.061	.018	.114	.059	.017	.109	.057	.017	
7.0	.122	.060	.017	.119	.059	.017	.114	.058	.017	.110	.056	.016	.105	.055	.016	
8.0	.116	.057	.016	.114	.056	.016	.109	.055	.016	.105	.053	.015	.101	.052	.015	
9.0	.111	.054	.015	.109	.053	.015	.105	.052	.015	.101	.051	.015	.098	.050	.014	
10.0	.106	.051	.014	.105	.051	.014	.101	.049	.014	.098	.048	.014	.094	.047	.014	

<input type="checkbox"/> cc	80%			70%			50%			30%			10%			0
<input type="checkbox"/> w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
<input type="checkbox"/> fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.087	.057	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.069	.052	.046	.040	.017	.015	.013	
3.0	.142	.113	.091	.121	.098	.079	.083	.068	.055	.048	.040	.033	.015	.013	.011	
4.0	.131	.099	.074	.112	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.121	.087	.061	.104	.075	.053	.072	.052	.038	.042	.031	.022	.013	.010	.007	
6.0	.113	.077	.051	.097	.067	.045	.067	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.106	.070	.044	.092	.060	.038	.063	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.100	.063	.038	.086	.055	.033	.060	.038	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.033	.082	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.090	.053	.029	.078	.046	.025	.054	.033	.018	.031	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME: LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	5.0	5.9	5.2	6.0	6.2	4.9	5.8	5.1	5.9	6.1
3H	5.6	6.4	5.9	6.6	6.8	5.5	6.3	5.8	6.5	6.7
4H	5.8	6.6	6.1	6.8	7.0	5.6	6.4	5.9	6.6	6.8
6H	6.0	6.7	6.3	6.9	7.2	5.6	6.3	5.9	6.6	6.8
8H	6.0	6.7	6.3	6.9	7.2	5.6	6.3	5.9	6.5	6.8
12H	5.9	6.6	6.3	6.9	7.1	5.5	6.2	5.9	6.5	6.7
4H 2H	5.2	6.0	5.5	6.2	6.4	5.2	5.9	5.4	6.1	6.4
3H	6.0	6.7	6.3	6.9	7.2	5.9	6.6	6.2	6.8	7.1
4H	6.3	6.9	6.7	7.2	7.5	6.1	6.7	6.4	7.0	7.3
6H	6.6	7.1	6.9	7.4	7.8	6.1	6.6	6.5	7.0	7.3
8H	6.6	7.1	7.0	7.4	7.8	6.1	6.6	6.5	6.9	7.3
12H	6.5	7.0	6.9	7.4	7.7	6.0	6.5	6.4	6.8	7.2
8H 4H	6.4	6.9	6.8	7.2	7.6	6.1	6.6	6.5	7.0	7.4
6H	6.7	7.1	7.1	7.5	7.9	6.2	6.6	6.6	7.0	7.4
8H	6.7	7.1	7.1	7.5	7.9	6.1	6.5	6.6	6.9	7.3
12H	6.7	7.0	7.1	7.4	7.9	6.1	6.4	6.5	6.8	7.3
12H 4H	6.3	6.8	6.7	7.2	7.5	6.1	6.6	6.5	6.9	7.3
6H	6.6	7.0	7.1	7.4	7.8	6.2	6.5	6.6	6.9	7.4
8H	6.7	7.0	7.1	7.4	7.9	6.1	6.4	6.6	6.9	7.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.8					+ 0.6 / - 0.8				
1.5H	+ 1.1 / - 0.4					+ 0.6 / - 0.5				
2.0H	+ 0.9 / - 0.8					+ 1.1 / - 0.8				

CIE Pub.117, 867.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.5)  
 Area: 0.111111 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	86	80	76	86	80	76	85	79	76	72
0.80	94	88	84	93	87	84	92	87	83	80
1.00	98	93	89	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

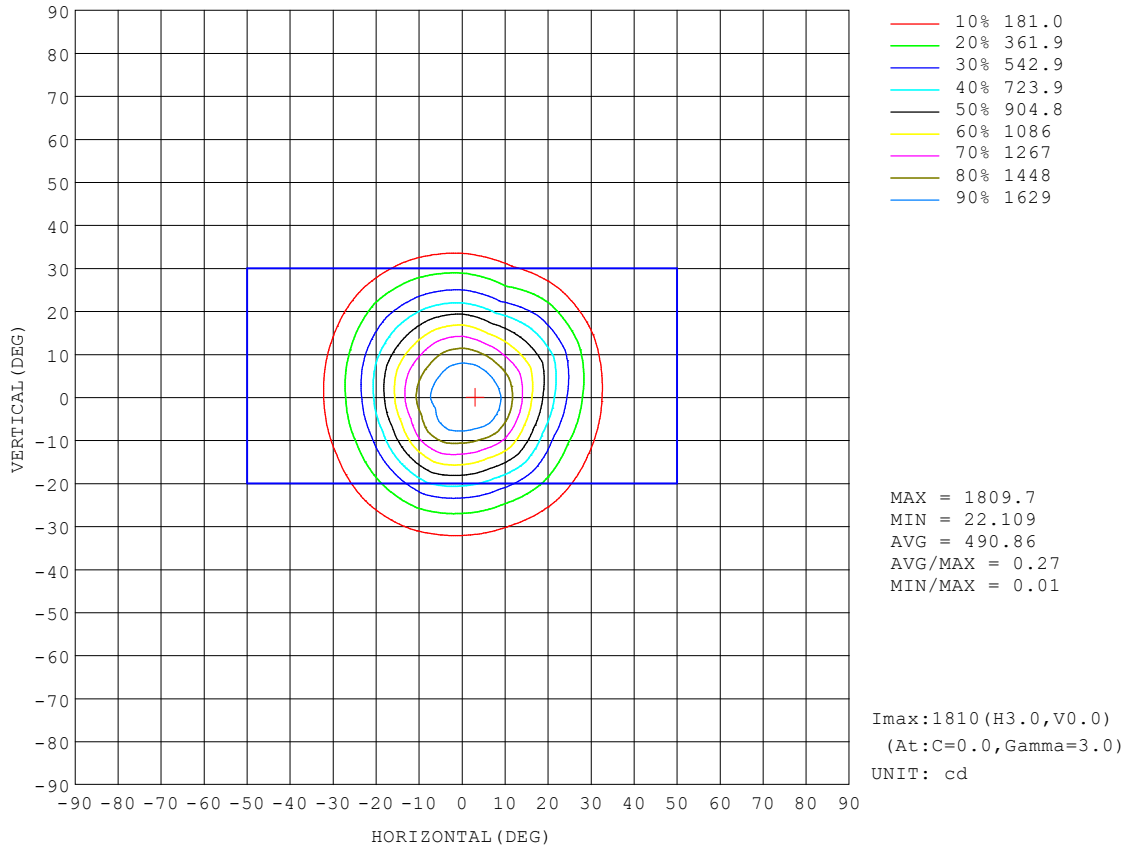


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

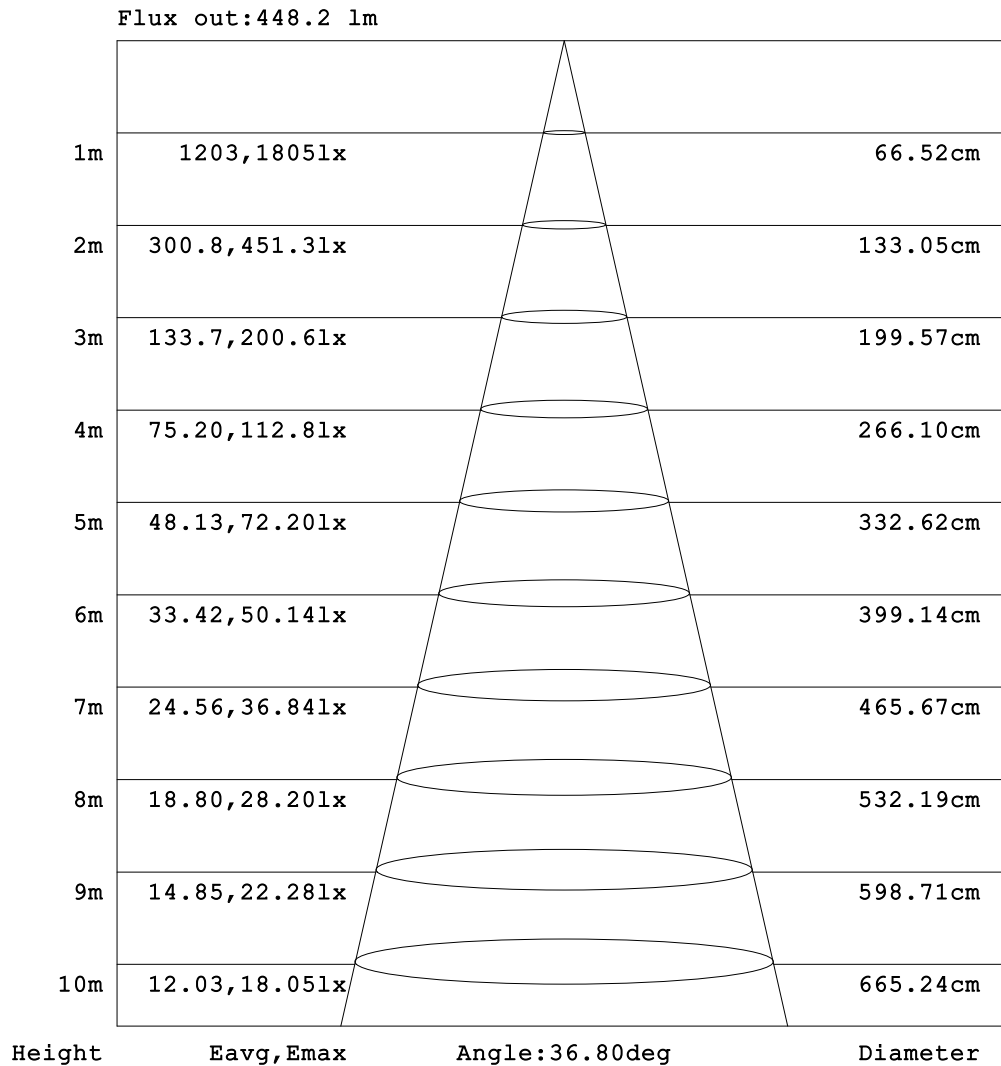


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME: LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

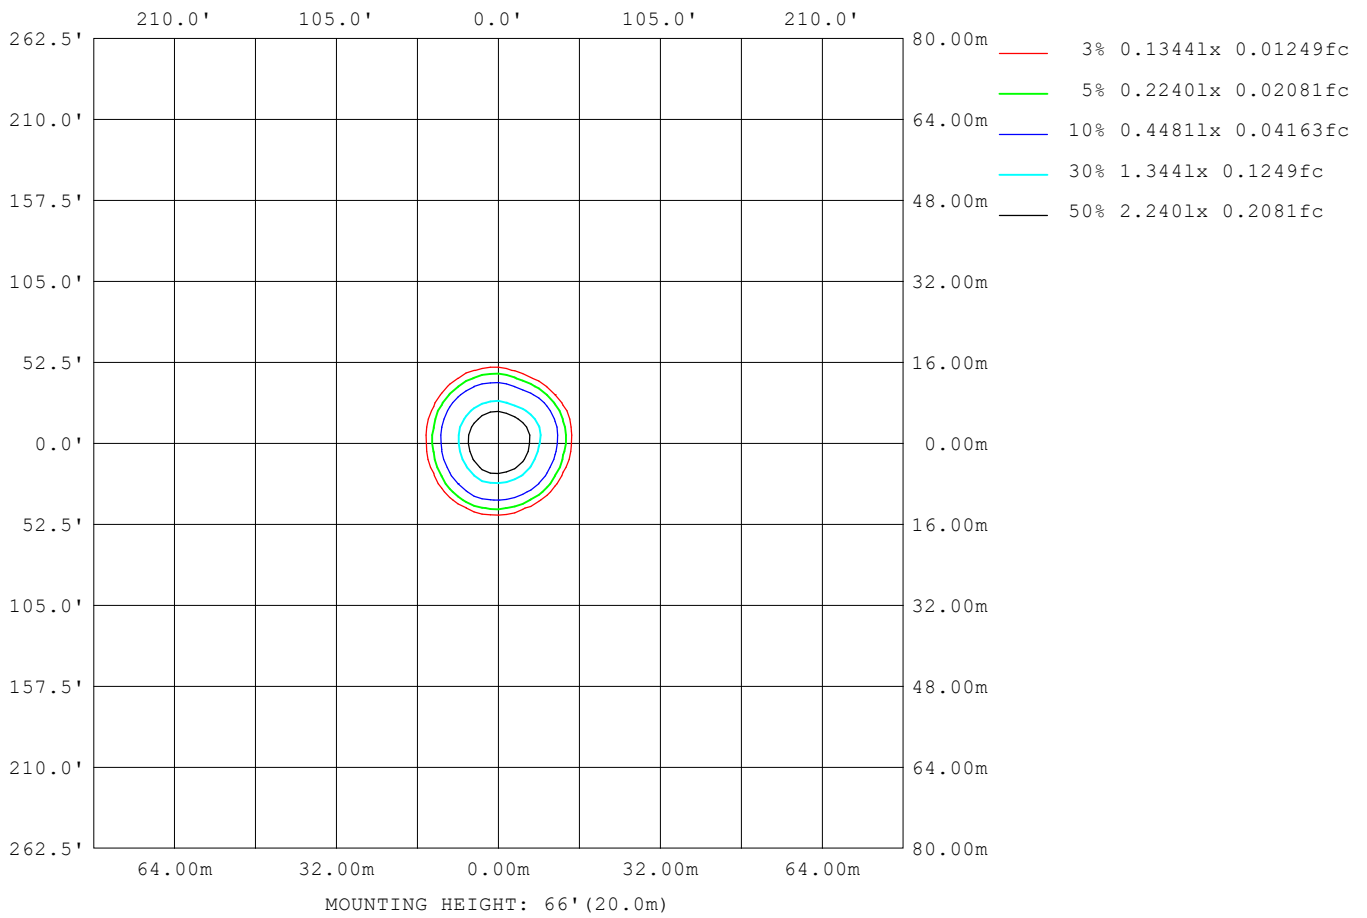

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:  
Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
Humidity:65.0%  
Test Distance:3.080m [K=1.0000]  
Remarks:

**LED Avg.L Report**

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME: LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	277
L_0~180 (75) av	209
L_0~180 (85) av	70
L_90~270 (65) av	241
L_90~270 (75) av	118
L_90~270 (85) av	8
L_45 (65) av	264
L_45 (75) av	157
L_45 (85) av	8

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

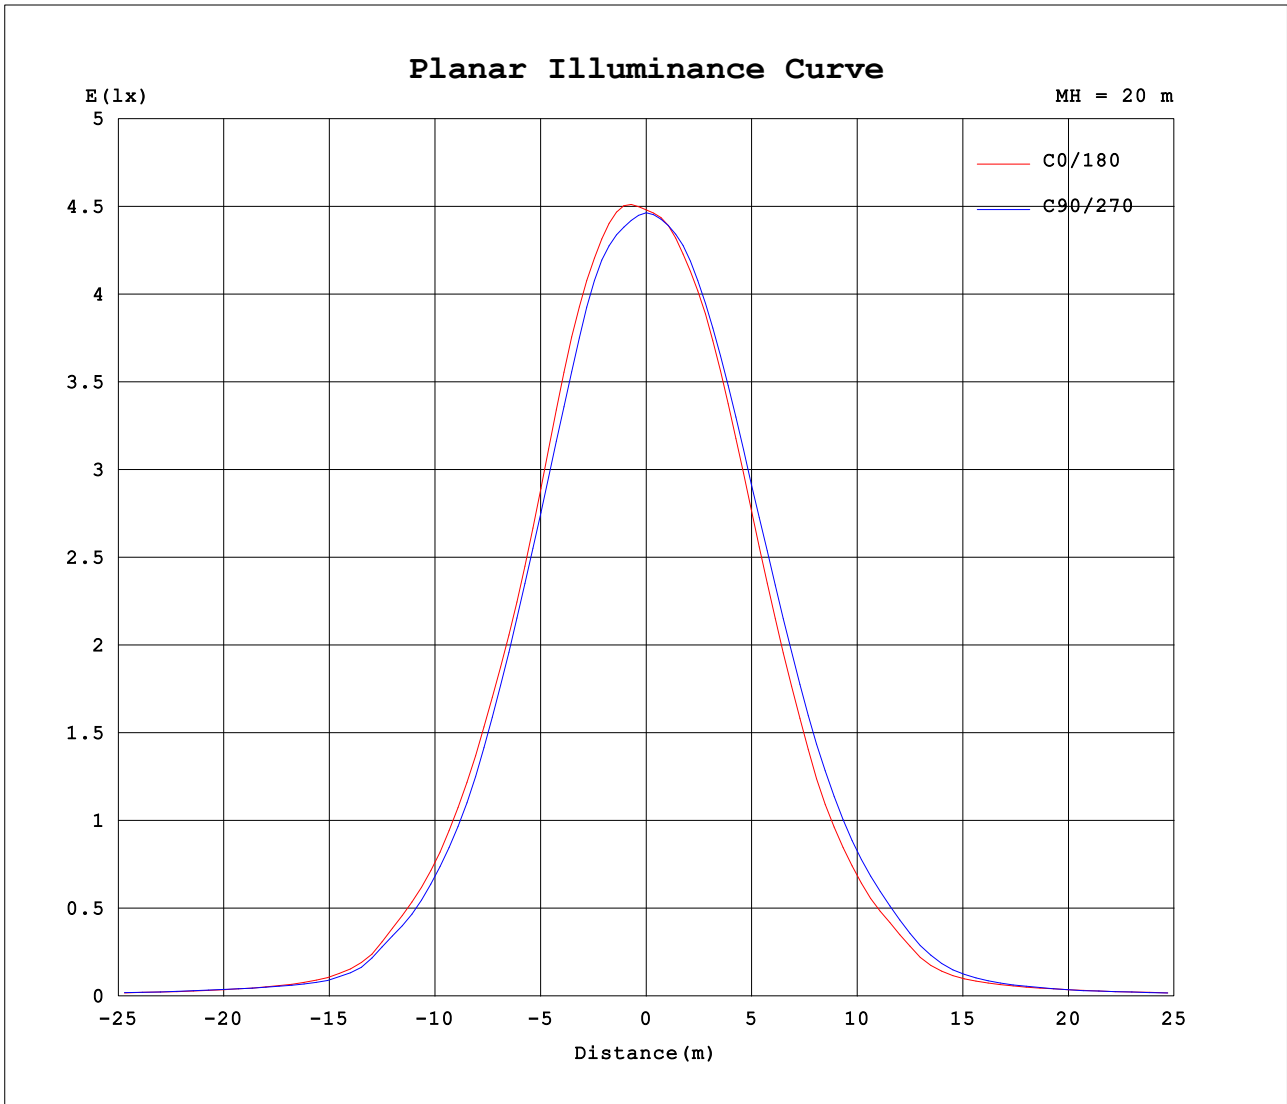

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators:  
 Test Date: 2021-10-19

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity: 65.0%  
 Test Distance: 3.080m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.05V I:0.1095A P:12.957W PF:0.9484 Freq:59.98Hz Lamp Flux:867.386x1 lm		
NAME:LED-2-S15W-L5CCTWH-T	TYPE:	WEIGHT:
SPEC.:3000K 90	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ □ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783			
5	1773	1764	1753	1733	1728	1730	1722	1702	1703	1707	1708	1723	1729	1733	1745	1773			
10	1565	1562	1544	1493	1488	1531	1525	1480	1485	1479	1483	1517	1526	1528	1530	1569			
15	1178	1153	1166	1111	1132	1189	1172	1116	1131	1174	1180	1213	1209	1158	1185	1249			
20	817	754	789	737	765	821	778	735	760	827	848	871	856	796	871	934			
25	504	437	463	434	455	492	458	436	453	510	560	563	540	484	583	620			
30	282	248	253	239	247	264	256	245	258	294	341	342	317	271	337	346			
35	113	96.4	95.4	91.5	97.4	109	111	100	104	118	139	148	136	111	130	137			
40	61.1	56.7	56.7	56.0	56.3	57.7	59.4	58.3	59.0	63.7	69.8	73.6	67.3	61.3	67.3	68.4			
45	42.5	41.9	42.4	42.3	43.5	45.4	45.0	42.6	42.3	43.0	43.6	44.1	42.0	41.2	42.9	44.2			
50	33.0	33.0	33.3	33.2	33.9	34.6	34.4	33.2	32.8	33.0	33.1	32.6	31.7	31.3	31.9	33.3			
55	24.4	24.3	24.4	24.3	25.2	26.0	25.7	24.4	24.0	24.1	23.7	22.1	21.6	21.7	23.2	24.6			
60	17.6	17.8	18.0	18.0	18.6	19.0	18.8	17.9	17.5	17.3	16.3	15.0	14.3	14.6	16.1	17.7			
65	13.1	13.3	13.5	13.6	13.5	13.6	13.8	13.4	13.0	12.5	11.1	9.88	9.15	9.42	11.0	13.0			
70	9.22	9.44	9.56	8.98	8.53	8.71	9.26	9.35	9.13	8.40	6.94	5.83	5.26	5.45	6.80	8.66			
75	6.04	6.23	5.69	4.90	4.44	4.65	5.29	5.82	5.97	4.99	3.65	2.79	2.35	2.47	3.46	4.97			
80	3.45	3.27	2.35	1.61	1.28	1.45	2.06	2.83	3.35	2.25	1.15	0.60	0.38	0.39	0.94	2.06			
85	0.61	0.76	0.09	0.09	0.09	0.07	0.06	0.64	0.75	0.38	0.07	0.07	0.07	0.07	0.10	0.29			
90	0.03	0.02	0.02	0.02	0.02	0.02	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:  
 Test Date:2021-10-19

□ Range: 0 - 90DEG  
 □ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.421  
 Humidity:65.0%  
 Test Distance:3.080m [K=1.0000]  
 Remarks: