
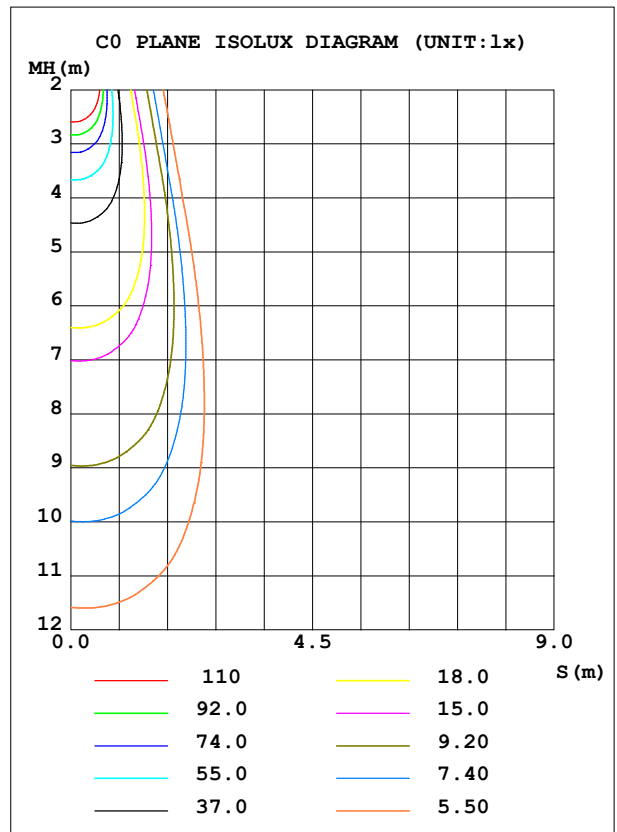


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	739.9	S/MH (C0/180)	0.52
NOMINAL POWER (W)	5	LOR (%)	100.0	S/MH (C90/270)	0.56
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	373.67	η UP, DN (C0-180)	0.0, 51.0
NOMINAL FLUX (lm)	373.667	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	0.55

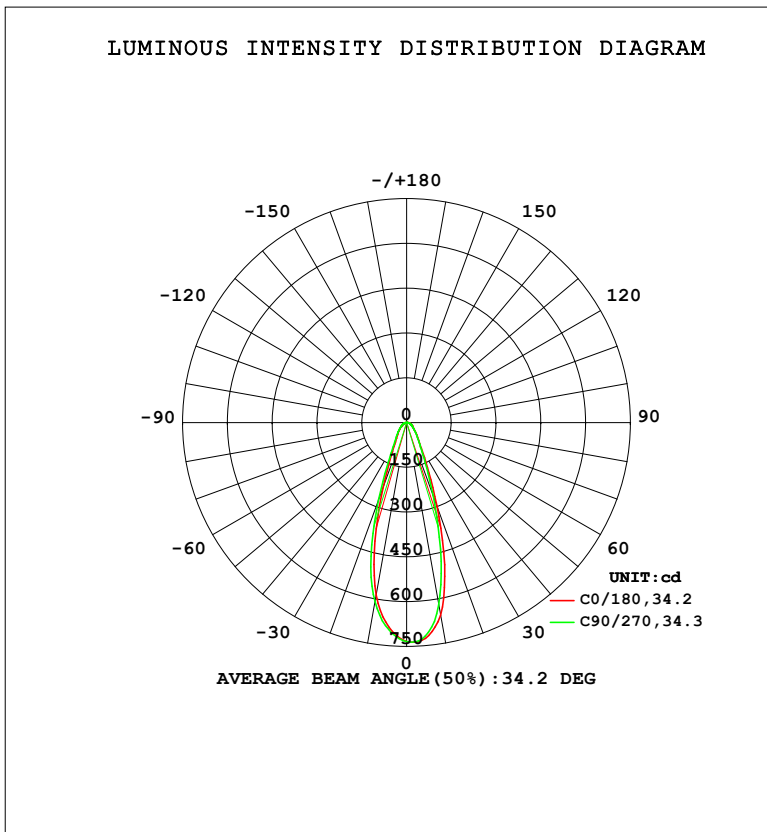

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	655.0	649.6	620.3	593.3	587.0	587.1	610.6	637.4	0- 10	64.77	64.77	17.3,17.3
20	298.3	300.9	260.1	223.1	229.2	249.4	276.5	290.8	10- 20	121.3	186.1	49.8,49.8
30	99.21	107.1	94.25	79.59	76.77	79.94	87.68	91.95	20- 30	70.17	256.2	68.6,68.6
40	51.89	55.66	50.28	45.22	44.46	45.52	47.69	49.19	30- 40	40.60	296.8	79.4,79.4
50	31.31	32.36	30.30	27.92	27.66	27.79	29.27	29.94	40- 50	29.38	326.2	87.3,87.3
60	20.50	20.84	19.64	18.56	18.67	18.59	19.03	19.47	50- 60	21.50	347.7	93.1,93.1
70	12.80	12.75	11.79	11.32	11.50	11.58	11.98	12.32	60- 70	15.42	363.1	97.2,97.2
80	6.026	5.697	2.502	4.681	4.898	5.108	4.387	5.991	70- 80	9.018	372.1	99.6,99.6
90	0.0489	0.0479	0.0382	0.0472	0.0315	0.0249	0.0186	0.0199	80- 90	1.519	373.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

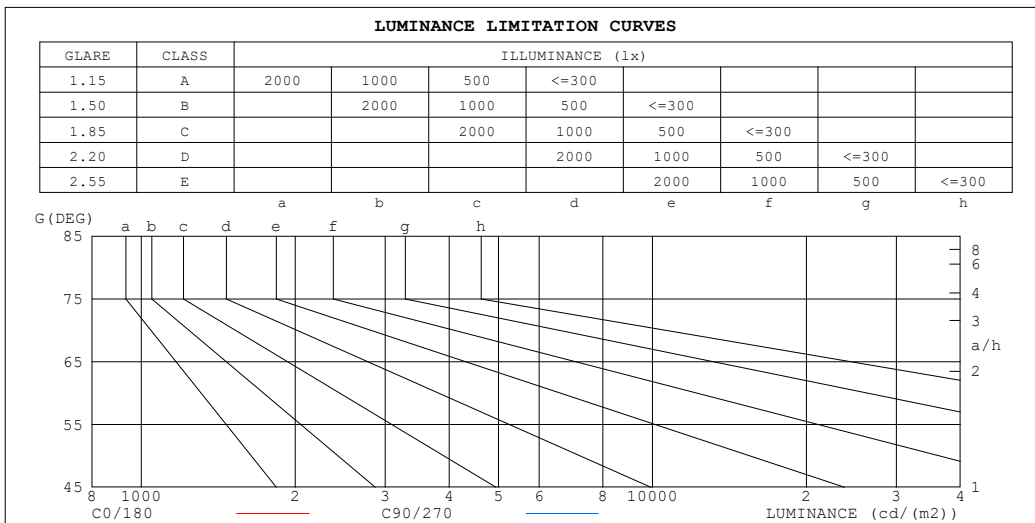

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	279	8
80	314	130
75	325	288
70	339	311
65	353	331
60	371	354
55	397	382
50	441	425
45	514	489


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.07	1.04	1.07	1.05	1.03	1.03	1.01	.99	.90	.98	.96	.96	.95	.94	.92
2.0	1.01	.97	.93	.99	.95	.92	.96	.93	.90	.93	.90	.88	.90	.88	.86	.84
3.0	.94	.88	.84	.92	.87	.83	.90	.85	.82	.87	.84	.81	.85	.82	.79	.78
4.0	.88	.82	.77	.86	.81	.77	.84	.79	.76	.82	.78	.75	.80	.77	.74	.72
5.0	.82	.76	.72	.81	.75	.71	.79	.74	.71	.78	.73	.70	.76	.72	.69	.68
6.0	.77	.71	.67	.77	.71	.67	.75	.70	.66	.74	.69	.66	.72	.68	.65	.64
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.66	.62	.69	.65	.62	.60
8.0	.70	.64	.60	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.59	.57
9.0	.66	.60	.57	.66	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.55
10.0	.63	.58	.54	.63	.57	.54	.62	.57	.54	.61	.57	.53	.61	.56	.53	.52

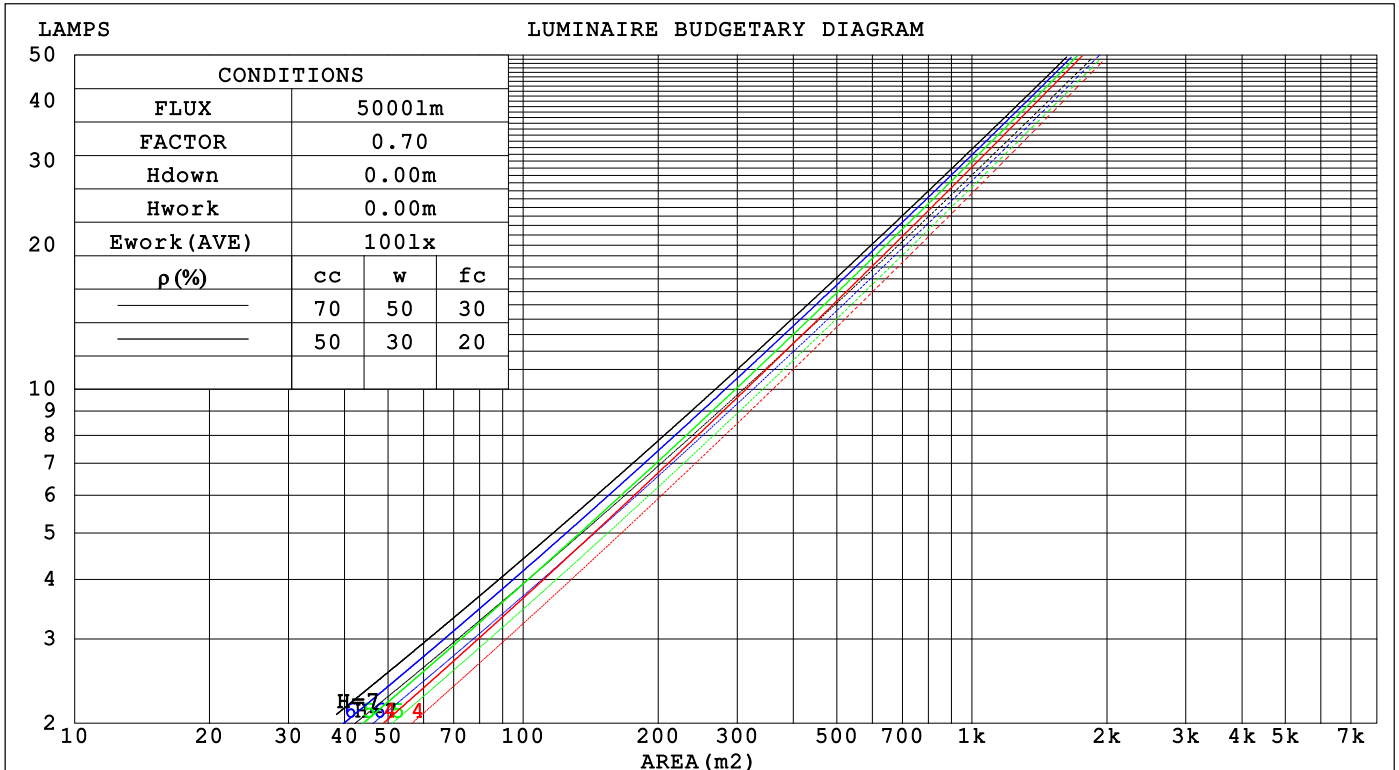

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.201	.114	.036	.194	.111	.035	.182	.104	.033	.170	.098	.031	.159	.092	.030	
2.0	.190	.104	.032	.184	.101	.031	.173	.096	.030	.163	.092	.029	.154	.087	.028	
3.0	.178	.095	.028	.173	.092	.028	.163	.089	.027	.155	.085	.026	.147	.081	.025	
4.0	.166	.086	.025	.162	.085	.025	.154	.082	.024	.146	.079	.024	.139	.076	.023	
5.0	.155	.079	.023	.152	.078	.023	.145	.075	.022	.138	.073	.022	.132	.071	.021	
6.0	.146	.073	.021	.143	.072	.021	.137	.070	.020	.131	.068	.020	.126	.066	.020	
7.0	.138	.068	.019	.135	.067	.019	.129	.065	.019	.124	.064	.019	.120	.062	.018	
8.0	.130	.064	.018	.128	.063	.018	.123	.061	.018	.118	.060	.017	.114	.059	.017	
9.0	.123	.060	.017	.121	.059	.017	.117	.058	.016	.113	.057	.016	.109	.055	.016	
10.0	.117	.056	.016	.115	.056	.016	.112	.055	.015	.108	.054	.015	.105	.053	.015	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.159	.132	.110	.136	.114	.095	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.147	.114	.087	.126	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010	
4.0	.136	.099	.071	.117	.086	.061	.080	.060	.043	.047	.035	.026	.015	.011	.008	
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.119	.078	.049	.103	.068	.043	.071	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.042	.097	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005	
8.0	.106	.064	.036	.091	.056	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.100	.059	.031	.087	.051	.027	.060	.036	.019	.035	.021	.012	.011	.007	.004	
10.0	.095	.055	.027	.082	.047	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.4	11.4	10.7	11.6	11.8	10.3	11.3	10.5	11.5	11.6
3H	11.7	12.6	11.9	12.8	13.0	11.4	12.4	11.7	12.6	12.8
4H	12.2	13.1	12.5	13.3	13.5	11.9	12.8	12.2	13.0	13.2
6H	12.7	13.5	13.0	13.7	14.0	12.2	13.0	12.5	13.2	13.5
8H	12.8	13.6	13.1	13.9	14.1	12.1	12.9	12.4	13.2	13.4
12H	12.9	13.7	13.3	14.0	14.3	12.1	12.8	12.4	13.1	13.4
4H 2H	10.9	11.8	11.2	12.0	12.2	10.8	11.7	11.1	11.9	12.1
3H	12.3	13.1	12.7	13.4	13.7	12.2	12.9	12.5	13.2	13.5
4H	13.0	13.7	13.4	14.0	14.3	12.8	13.5	13.1	13.8	14.1
6H	13.6	14.2	14.0	14.6	14.9	13.1	13.7	13.5	14.1	14.4
8H	13.8	14.4	14.2	14.8	15.2	13.1	13.6	13.4	14.0	14.4
12H	14.0	14.5	14.4	14.9	15.3	13.0	13.5	13.4	13.9	14.3
8H 4H	13.3	13.8	13.7	14.2	14.6	13.0	13.6	13.4	14.0	14.3
6H	14.0	14.5	14.4	14.9	15.3	13.4	13.9	13.9	14.3	14.7
8H	14.3	14.7	14.8	15.1	15.6	13.4	13.8	13.8	14.2	14.7
12H	14.5	14.9	15.0	15.3	15.8	13.3	13.7	13.8	14.2	14.6
12H 4H	13.2	13.8	13.7	14.2	14.5	13.0	13.6	13.4	13.9	14.3
6H	14.0	14.4	14.4	14.8	15.3	13.5	13.9	13.9	14.3	14.7
8H	14.3	14.7	14.8	15.1	15.6	13.4	13.8	13.9	14.2	14.7

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.3 / - 0.4	+ 0.3 / - 0.4
1.5H	+ 0.2 / - 0.3	+ 0.3 / - 0.4
2.0H	+ 0.3 / - 0.4	+ 0.5 / - 0.5

CIE Pub.117, 373.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.4)
 Area: 0.111111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3°C	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2022-08-24	Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	79	71	66	78	71	66	77	70	66	62
0.80	87	80	75	86	79	75	85	79	74	70
1.00	93	85	81	92	85	80	90	85	80	75
1.25	97	91	86	96	90	86	94	89	85	80
1.50	101	95	90	99	94	90	97	92	89	83
2.00	105	99	95	103	98	94	100	96	93	87
2.50	107	102	98	105	101	97	102	98	95	89
3.00	109	105	101	107	103	100	104	100	98	91
4.00	112	108	105	110	106	104	106	103	101	94
5.00	113	110	108	111	108	106	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

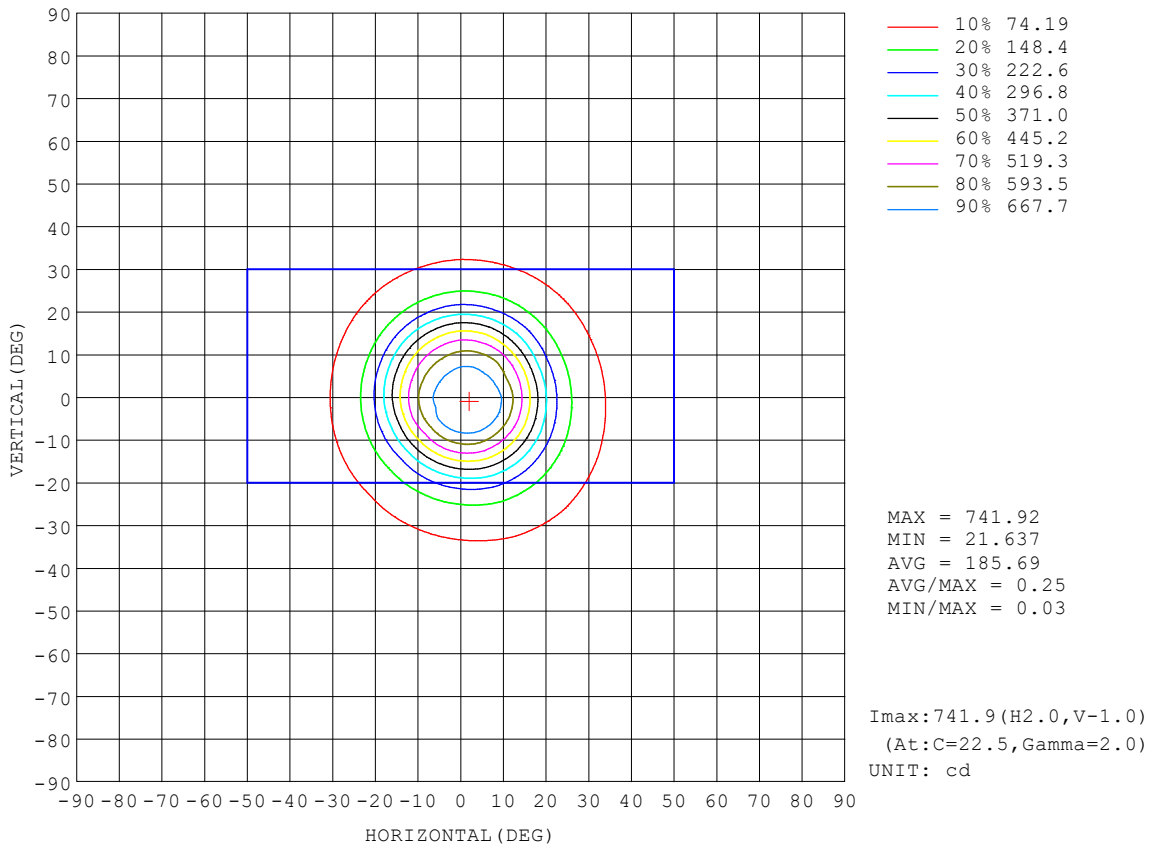


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

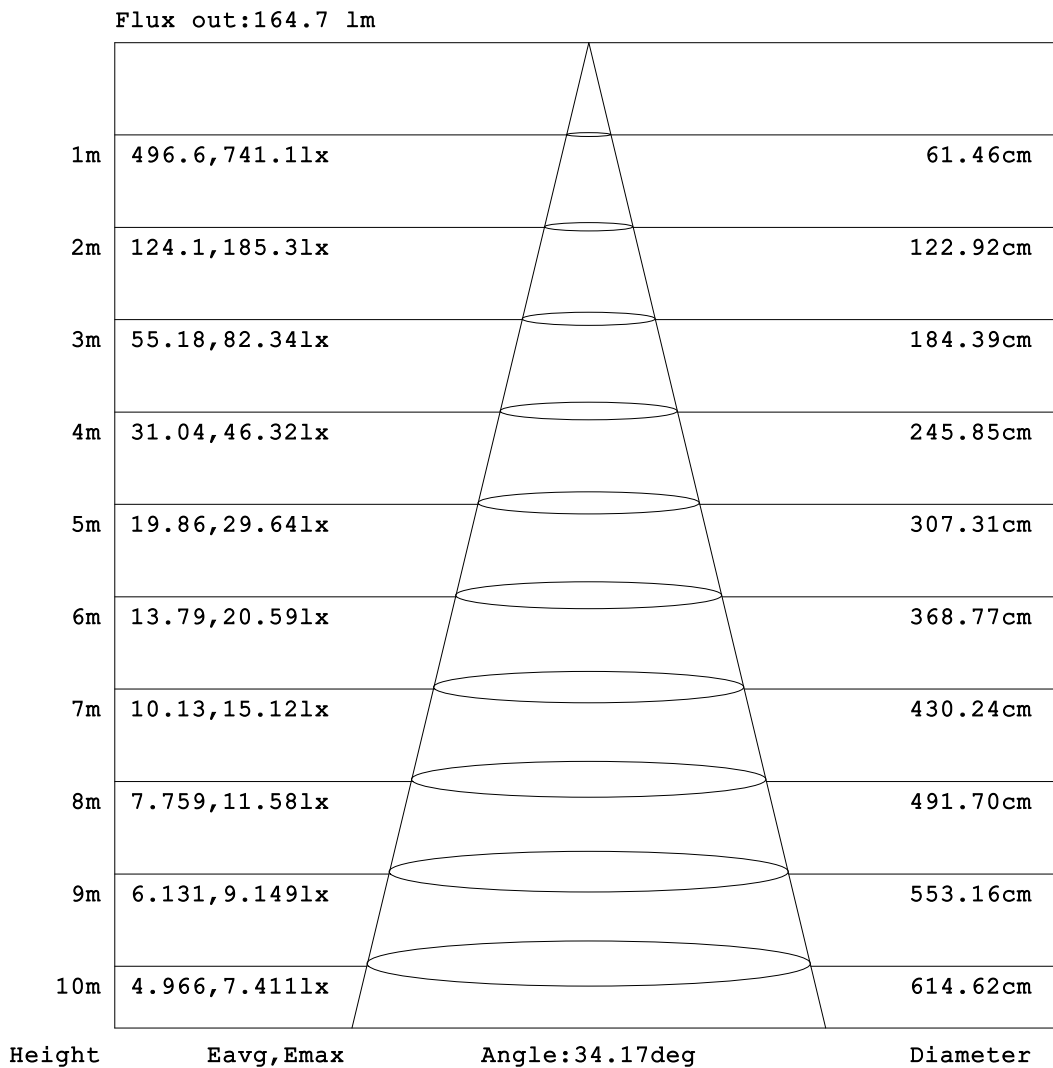


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

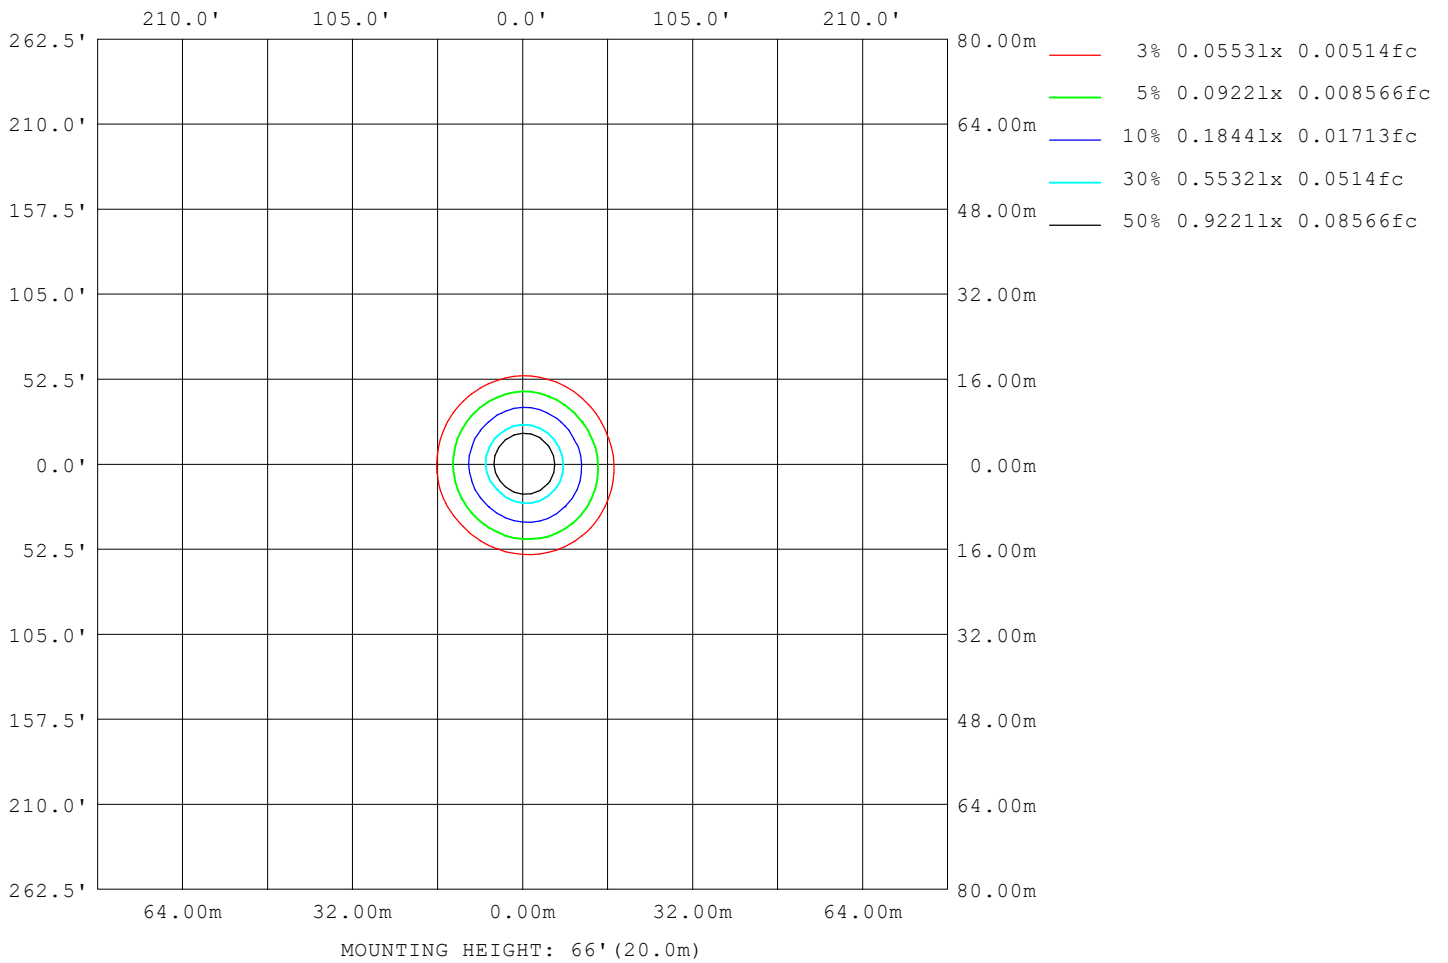

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	335
L_0~180 (75) av	302
L_0~180 (85) av	217
L_90~270 (65) av	329
L_90~270 (75) av	297
L_90~270 (85) av	6
L_45 (65) av	329
L_45 (75) av	298
L_45 (85) av	30

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

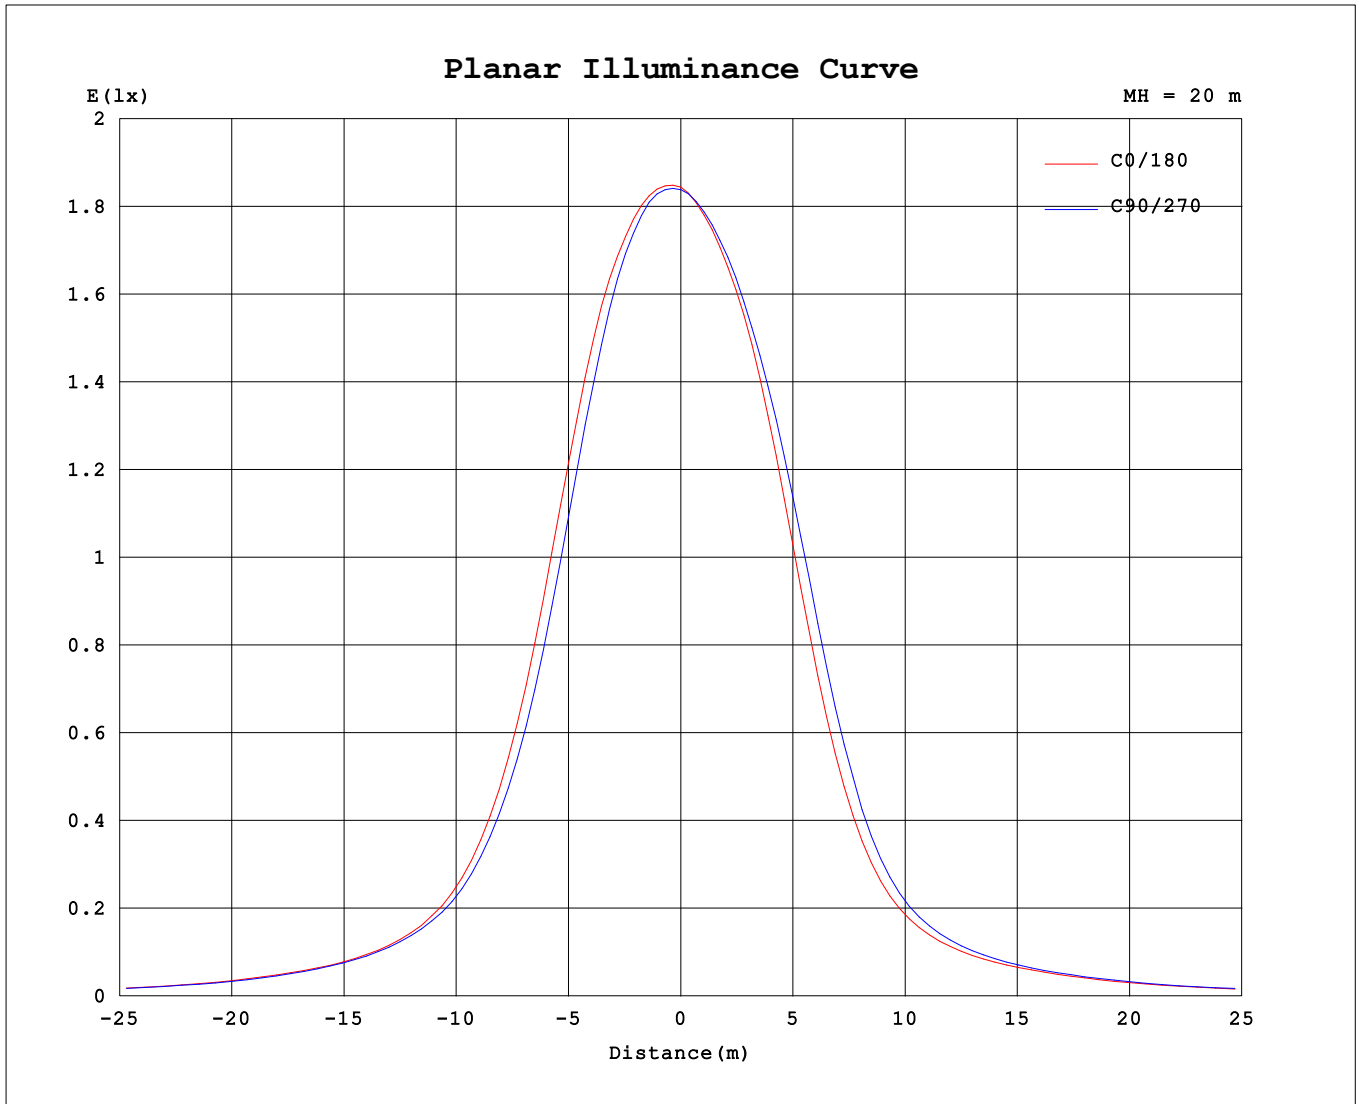

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.33V I:0.0529A P:4.7296W PF:0.7432 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:373.667x1 lm		
NAME: LED-2-S5W-5CCT-FG	TYPE:	WEIGHT:
SPEC.: 2700K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	734	734	734	734	734	734	734	734	734	734	734	734	734	734	734	734			
5	725	730	731	728	718	710	711	702	687	683	683	687	696	701	716	731			
10	655	658	650	638	620	604	593	597	587	583	587	595	611	624	637	641			
15	494	496	481	466	439	417	407	404	411	416	430	445	464	474	485	495			
20	298	307	301	287	260	240	223	228	229	234	249	261	276	282	291	287			
25	166	174	174	167	150	136	128	124	122	122	128	136	146	151	155	159			
30	99.2	105	107	104	94.2	86.2	79.6	78.8	76.8	77.4	79.9	83.2	87.7	89.3	92.0	93.2			
35	68.7	72.8	74.6	72.6	66.8	61.6	58.9	56.6	56.3	56.6	58.1	60.0	62.2	62.8	63.4	65.5			
40	51.9	54.4	55.7	54.1	50.3	47.1	45.2	45.6	44.5	44.5	45.5	46.4	47.7	48.2	49.2	49.7			
45	40.1	41.2	41.7	40.8	38.3	36.5	35.8	34.8	34.6	34.6	35.8	36.3	37.2	37.6	38.3	39.1			
50	31.3	32.0	32.4	31.9	30.3	29.0	27.9	28.2	27.7	27.5	27.8	28.6	29.3	29.4	29.9	30.3			
55	25.2	25.8	25.9	25.5	24.3	23.4	22.9	22.7	22.8	22.5	22.7	22.9	23.3	23.4	23.7	24.2			
60	20.5	20.8	20.8	20.4	19.6	18.8	18.6	18.6	18.7	18.5	18.6	18.8	19.0	19.1	19.5	19.8			
65	16.5	16.7	16.6	16.2	15.5	14.9	14.7	14.9	15.0	14.9	15.0	15.2	15.4	15.6	15.7	15.9			
70	12.8	12.9	12.7	12.4	11.8	11.3	11.3	11.3	11.5	11.4	11.6	11.7	12.0	12.1	12.3	12.5			
75	9.29	9.33	9.09	8.76	8.26	7.93	7.74	8.05	8.07	8.11	8.31	8.54	8.83	8.94	9.10	9.00			
80	6.03	5.99	5.70	3.52	2.50	2.84	4.68	4.80	4.90	5.00	5.11	4.03	4.39	5.02	5.99	6.02			
85	2.69	2.20	0.07	0.07	0.08	0.06	0.12	1.42	1.52	1.38	0.26	0.03	0.04	0.05	0.69	2.58			
90	0.05	0.04	0.05	0.04	0.04	0.04	0.05	0.05	0.03	0.03	0.02	0.02	0.02	0.03	0.02	0.02			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-08-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks: