
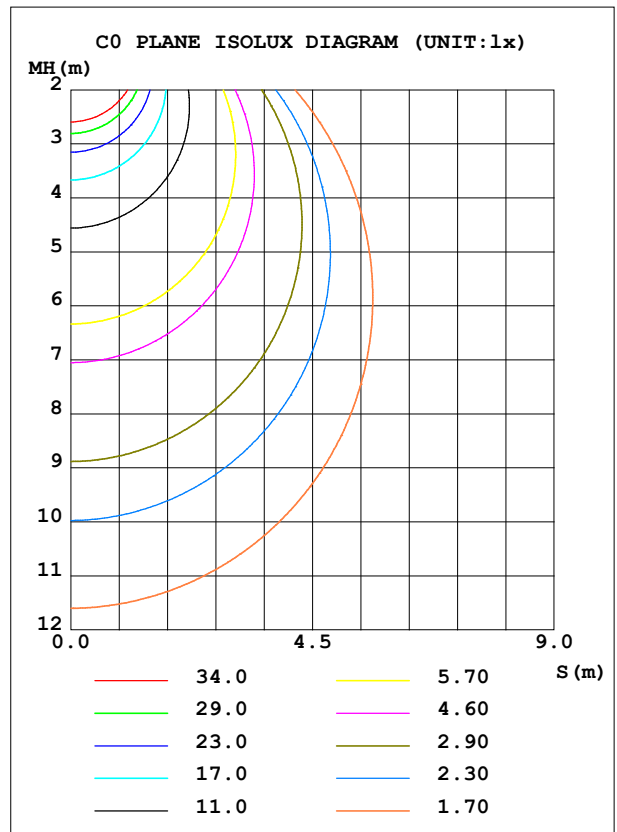


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	228.8	S/MH (C0/180)	1.27
NOMINAL POWER (W)	9	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	655.25	η UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	655.249	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

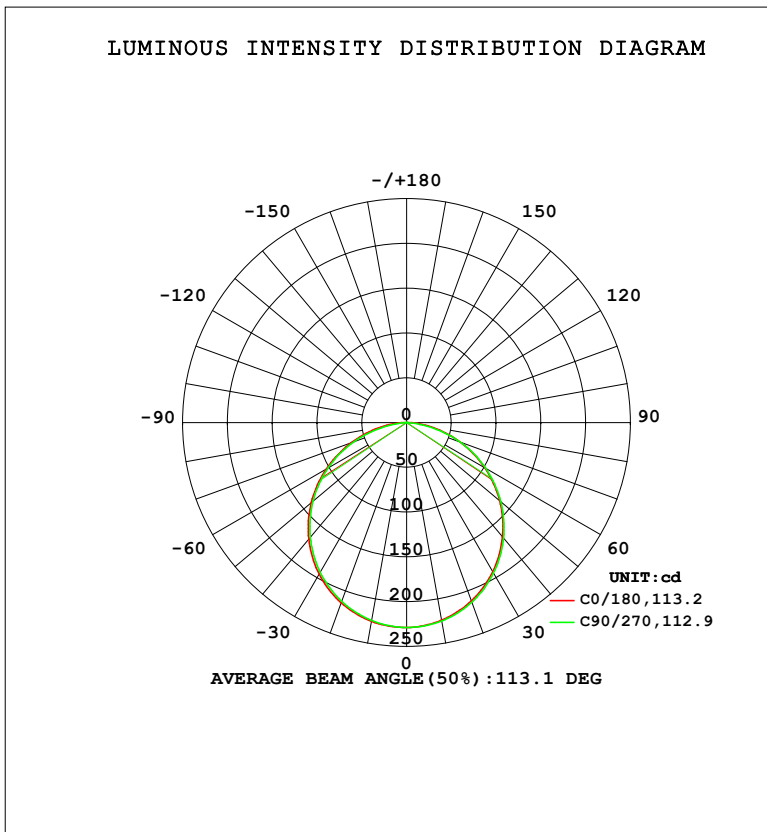

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	224.1	224.7	225.0	225.3	225.3	224.8	224.4	224.1	0- 10	21.64	21.64	3.3,3.3
20	211.7	212.8	213.3	213.9	214.1	213.1	212.3	211.6	10- 20	62.01	83.65	12.8,12.8
30	192.4	193.6	194.1	195.0	195.3	194.2	193.0	192.0	20- 30	94.08	177.7	27.1,27.1
40	166.6	168.1	168.4	169.4	170.0	168.7	167.3	166.2	30- 40	113.6	291.4	44.5,44.5
50	135.7	137.1	137.3	138.3	139.0	137.7	136.4	135.2	40- 50	118.1	409.5	62.5,62.5
60	100.7	101.9	102.0	102.9	103.5	102.3	101.1	100.2	50- 60	107.1	516.6	78.8,78.8
70	63.42	64.35	63.41	64.93	65.60	64.05	62.13	62.50	60- 70	82.15	598.8	91.4,91.4
80	27.78	25.66	23.20	26.07	29.12	24.53	21.51	23.73	70- 80	46.77	645.5	98.5,98.5
90	0.2865	0.2519	0.2461	0.2430	0.1563	0.1414	0.1295	0.1444	80- 90	9.728	655.2	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

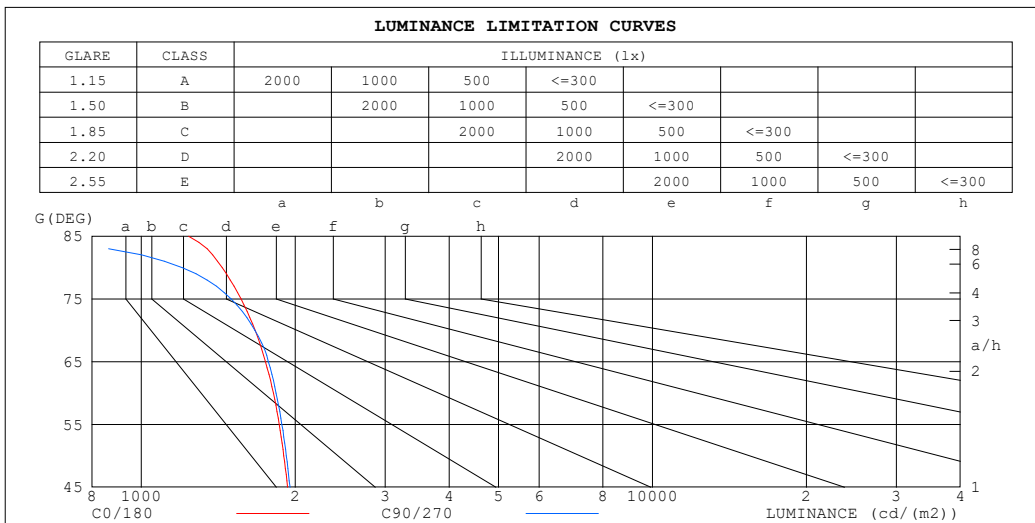

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1237	490
80	1440	1203
75	1567	1499
70	1669	1668
65	1749	1773
60	1813	1835
55	1861	1883
50	1900	1922
45	1932	1953


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
	ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.73	.79	.75	.72	.70
3.0	.79	.71	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.59
4.0	.70	.61	.55	.69	.61	.54	.66	.59	.53	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.59	.52	.46	.57	.51	.46	.56	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.41	.54	.46	.40	.52	.45	.40	.50	.44	.40	.38
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.36	.47	.40	.35	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.43	.37	.32	.42	.36	.31	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.33	.29	.39	.33	.28	.27
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

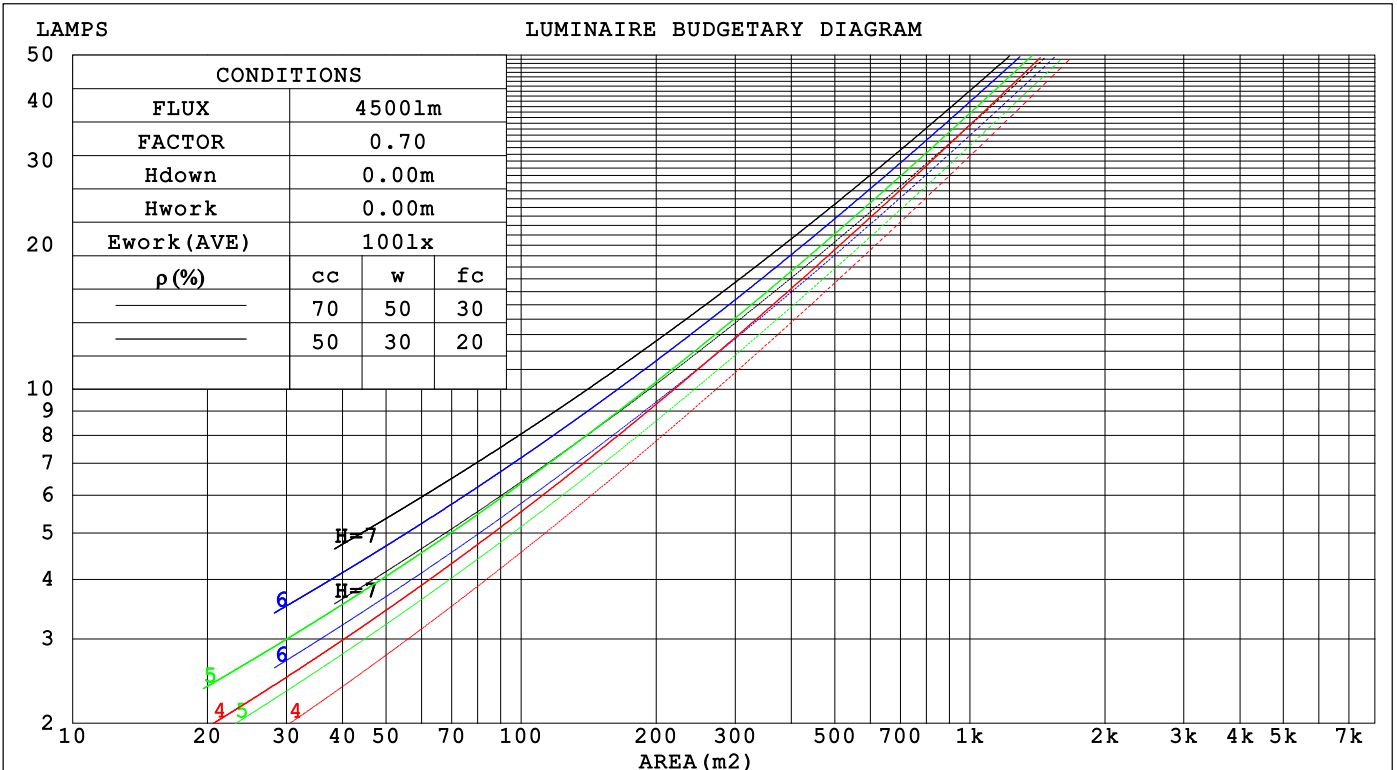

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.307	.175	.055	.300	.171	.054	.287	.165	.053	.275	.158	.051	.263	.153	.049	
2.0	.291	.159	.049	.285	.157	.048	.273	.152	.047	.262	.147	.046	.252	.143	.045	
3.0	.270	.144	.043	.264	.142	.043	.254	.138	.042	.244	.134	.041	.235	.130	.040	
4.0	.249	.130	.038	.244	.128	.038	.235	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.117	.034	.226	.116	.034	.218	.114	.033	.210	.111	.033	.203	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.098	.028	.196	.097	.028	.189	.096	.028	.183	.094	.027	.177	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.088	.025	.172	.087	.025	.166	.085	.025	
9.0	.174	.084	.024	.171	.084	.023	.166	.082	.023	.161	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.161	.078	.022	.157	.077	.022	.152	.076	.021	.148	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.074	.141	.099	.064	.097	.068	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm										
NAME: LED-S9W-5CCT-WH					TYPE:			WEIGHT:		
SPEC.: 5000K					DIM.:			SERIAL No.:		
MFR.: Light by Lotus					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.5	18.1	16.8	18.3	18.5	16.6	18.1	16.9	18.3	18.5
3H	18.1	19.5	18.4	19.7	20.0	18.1	19.5	18.4	19.8	20.0
4H	18.7	20.1	19.0	20.3	20.6	18.7	20.0	19.0	20.3	20.6
6H	19.2	20.4	19.5	20.7	21.0	19.1	20.3	19.4	20.6	20.9
8H	19.3	20.5	19.7	20.8	21.1	19.1	20.3	19.5	20.6	20.9
12H	19.4	20.6	19.8	20.9	21.2	19.1	20.3	19.5	20.6	20.9
4H 2H	17.2	18.5	17.5	18.8	19.0	17.2	18.6	17.5	18.8	19.1
3H	18.9	20.1	19.3	20.4	20.7	18.9	20.1	19.3	20.4	20.7
4H	19.7	20.7	20.0	21.1	21.4	19.6	20.7	20.0	21.0	21.4
6H	20.3	21.2	20.6	21.6	21.9	20.1	21.0	20.5	21.4	21.8
8H	20.5	21.3	20.9	21.7	22.1	20.2	21.1	20.6	21.5	21.8
12H	20.6	21.4	21.0	21.8	22.2	20.2	21.0	20.6	21.4	21.8
8H 4H	19.9	20.8	20.3	21.2	21.6	19.9	20.8	20.3	21.2	21.5
6H	20.7	21.4	21.1	21.8	22.2	20.5	21.2	20.9	21.6	22.1
8H	20.9	21.6	21.4	22.0	22.5	20.7	21.3	21.1	21.7	22.2
12H	21.1	21.7	21.6	22.1	22.6	20.7	21.3	21.2	21.7	22.2
12H 4H	19.9	20.8	20.4	21.1	21.5	19.9	20.7	20.3	21.1	21.5
6H	20.7	21.4	21.2	21.8	22.2	20.5	21.2	21.0	21.6	22.1
8H	21.0	21.6	21.5	22.0	22.5	20.7	21.3	21.2	21.7	22.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 655.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.5)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	57	46	39	57	46	39	56	45	39	32
0.80	67	56	48	66	55	48	65	55	48	41
1.00	76	65	57	75	64	57	72	66	57	50
1.25	83	73	65	82	72	65	79	70	64	57
1.50	88	78	71	86	77	71	83	76	70	62
2.00	95	86	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

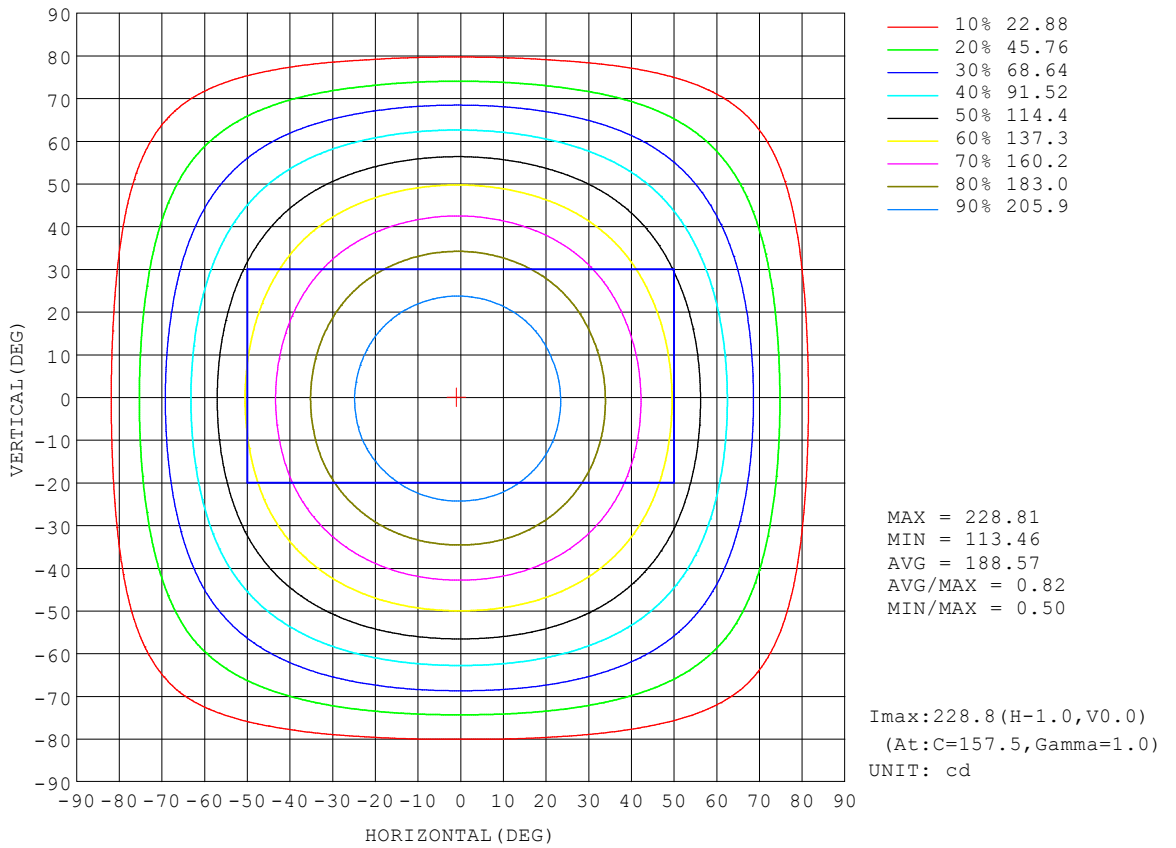


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

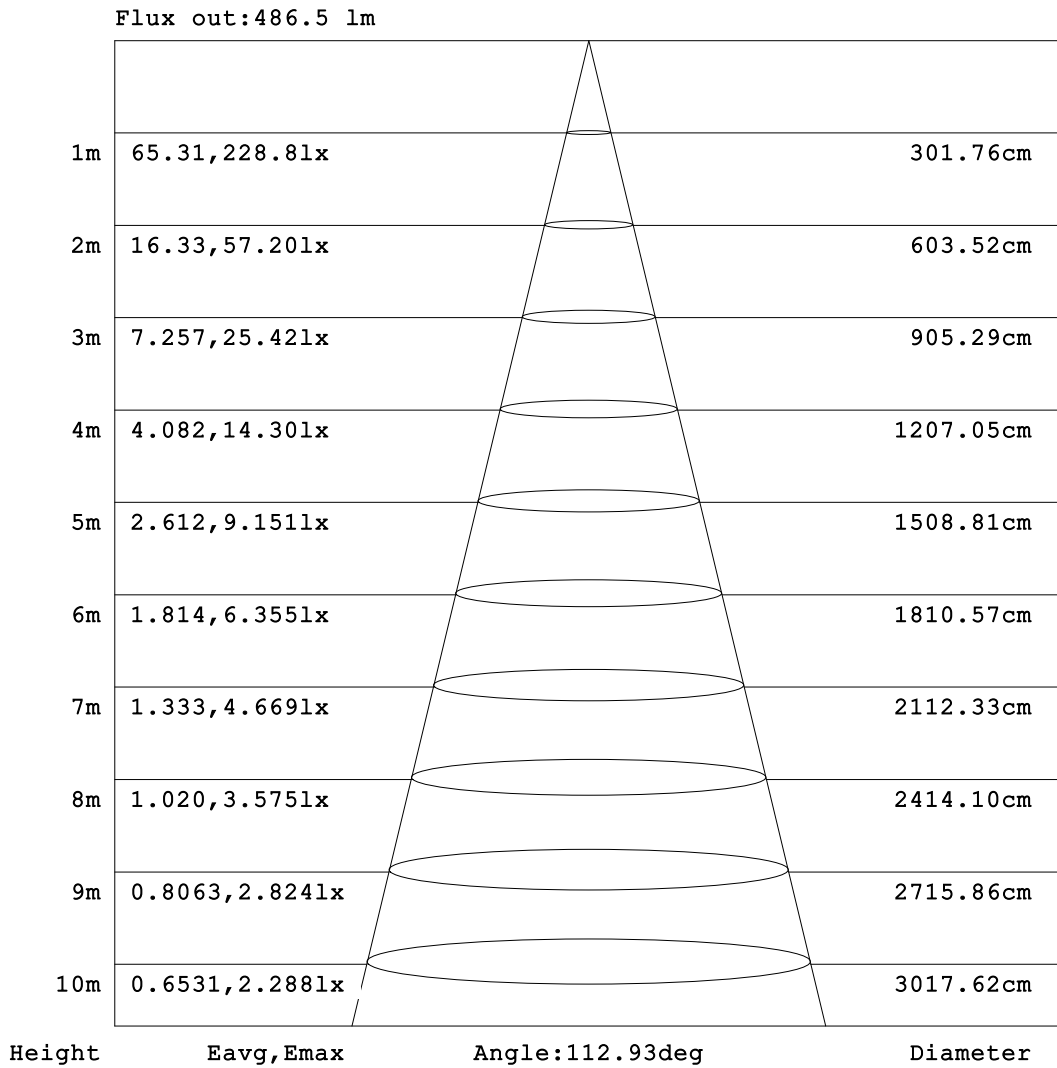


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

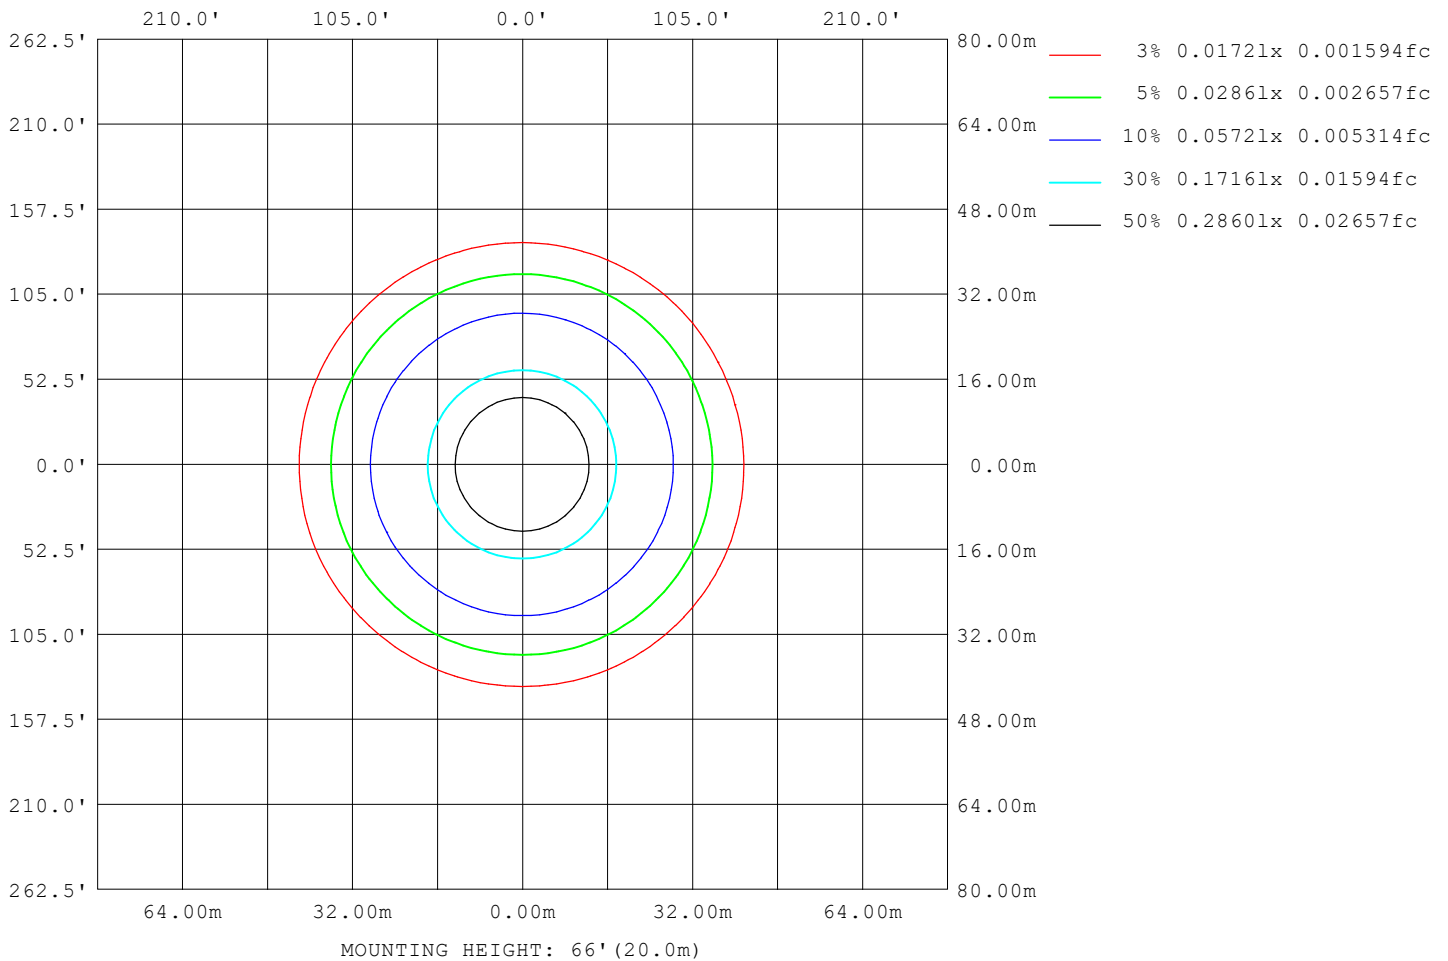

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1775
L_0~180 (75) av	1598
L_0~180 (85) av	1271
L_90~270 (65) av	1764
L_90~270 (75) av	1474
L_90~270 (85) av	393
L_45 (65) av	1770
L_45 (75) av	1542
L_45 (85) av	636

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

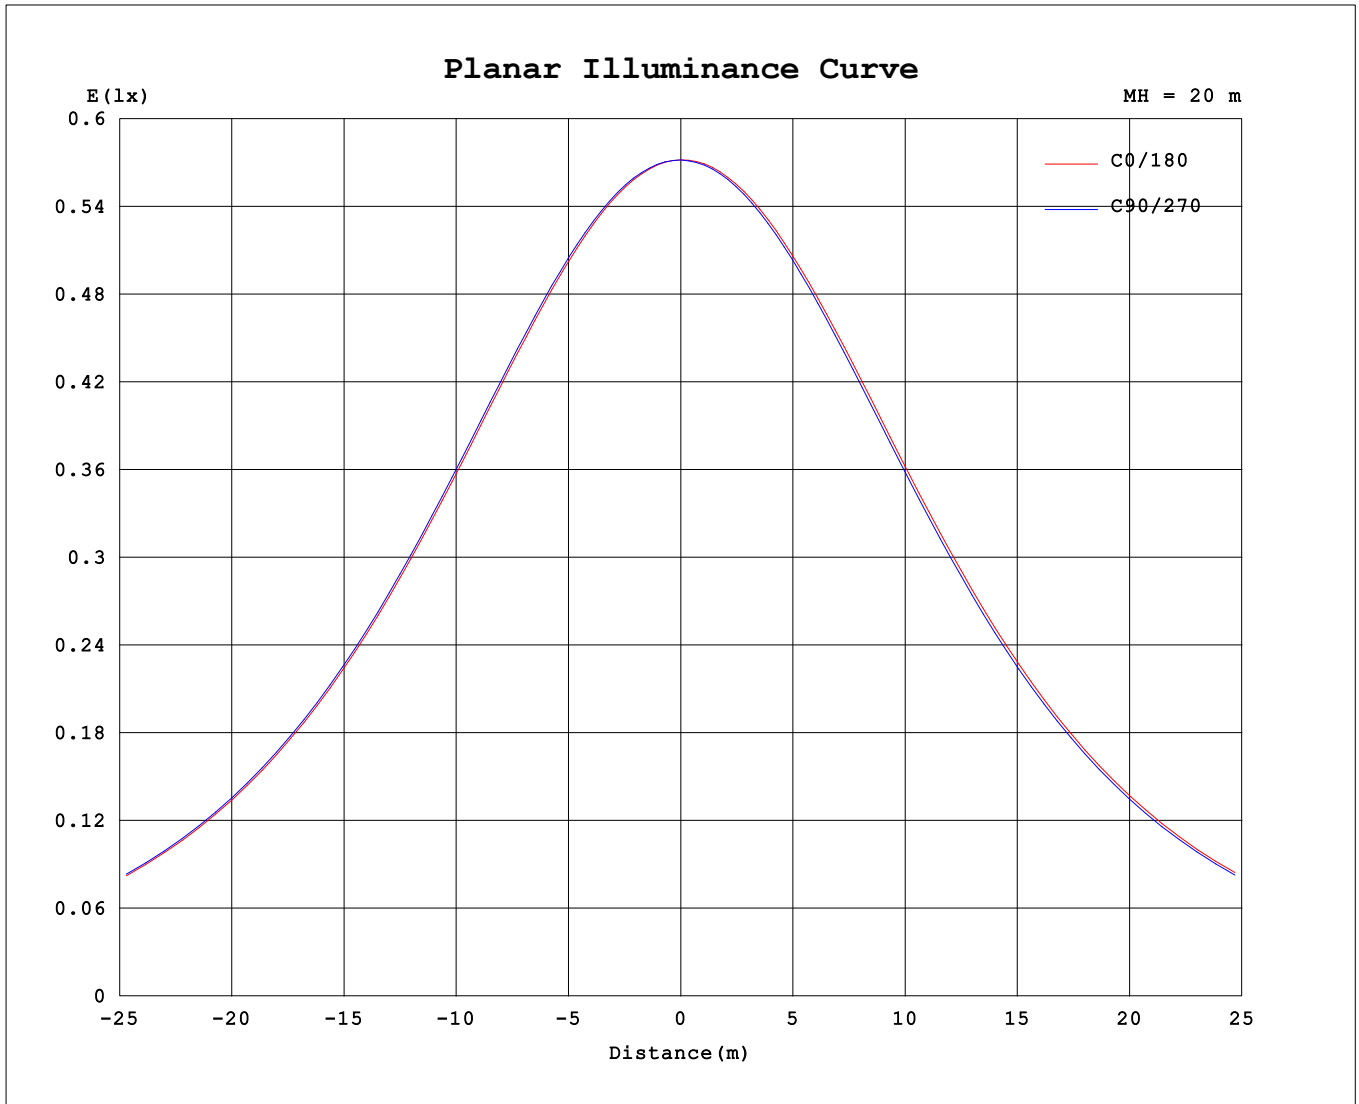

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-06-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.83V I:0.0931A P:8.1204W PF:0.7279 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:655.249x1 lm		
NAME: LED-S9W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: Light by Lotus	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	229	229	229	229	229	229	229	229	229	229	229	229	229	229	229	229			
5	227	228	228	228	228	228	228	228	228	228	228	228	228	227	227	227			
10	224	224	225	225	225	225	225	226	225	225	225	225	224	224	224	224			
15	219	219	220	220	220	220	221	221	221	220	220	219	219	219	219	219			
20	212	212	213	213	213	214	214	214	214	214	213	213	212	212	212	211			
25	203	204	204	204	205	205	205	206	206	205	205	204	204	203	203	202			
30	192	193	194	194	194	195	195	196	195	195	194	193	193	192	192	192			
35	180	181	182	182	182	183	183	184	183	183	182	181	181	180	180	179			
40	167	168	168	168	168	169	169	170	170	169	169	168	167	167	166	166			
45	152	153	153	154	153	154	155	156	155	154	154	153	152	152	151	151			
50	136	137	137	137	137	138	138	139	139	138	138	137	136	136	135	135			
55	119	120	120	120	120	121	121	122	122	121	120	120	119	118	118	118			
60	101	102	102	102	102	102	103	104	104	103	102	101	101	100	100	99.6			
65	82.1	83.1	83.3	83.6	83.3	83.7	84.1	85.1	84.6	84.0	83.5	82.7	82.4	81.8	81.6	81.1			
70	63.4	64.3	64.3	64.0	63.4	64.2	64.9	66.2	65.6	65.0	64.1	62.7	62.1	62.0	62.5	62.3			
75	45.0	45.8	44.8	43.9	43.1	44.0	45.3	47.3	46.8	45.9	44.2	42.2	41.7	41.8	43.0	43.9			
80	27.8	27.5	25.7	24.1	23.2	24.1	26.1	28.7	29.1	27.2	24.5	22.2	21.5	21.8	23.7	25.7			
85	12.0	10.1	7.04	5.52	4.75	5.24	6.80	10.6	12.6	9.30	5.52	3.29	2.86	3.29	5.28	8.38			
90	0.29	0.28	0.25	0.24	0.25	0.24	0.24	0.28	0.16	0.16	0.14	0.14	0.13	0.13	0.14	0.19			

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3°C	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2022-06-17	Remarks: