



ES-1010A-C-8W-IP67

Surface Mount 3D Bendable LED Neonflex 24V 2.4W/ft 10mm IP67

Project: _____

Location: _____

Model # : _____ Qty: _____


Notes: _____

DESCRIPTION

- 3D bendable surface mount neonflex waterproof
- Seamless linear light - no diffused cover needed
- No aluminum channel needed
- No hotspots and with CRI 90+ for vibrant colors
- Reinforced design for stable performance when bending
- 4 oz copper PCB and real gold wires for superb light maintenance
- Wires on both ends and 2 additional end caps included
- Available in 4ft, 8ft and 16ft lengths


INSTALLATION INSTRUCTIONS

1. Mount using the aluminum brackets and screws included

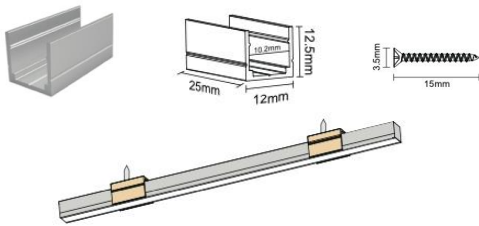

2. You may cut it once and use the wires on both ends to power the pieces.
Cut on trim marks every 4"

Minimum Bending Diameter: 4 3/4" (120mm) Horizontal | 6" (150mm) Vertical

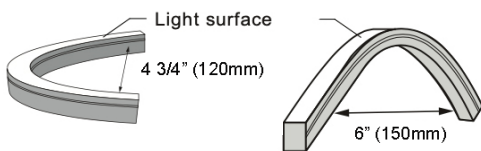


ORDERING GUIDE

example: **ES-1010A-C-8W-IP67-30K-16FT**

	- CCT (K)	- Length
ES-1010A-C-8W-IP67	-27K	-4FT
	-30K	-8FT
	-40K	-16FT
	-50K	

Included in every package:

2 end caps, 1 aluminum bracket and 1 screw per foot

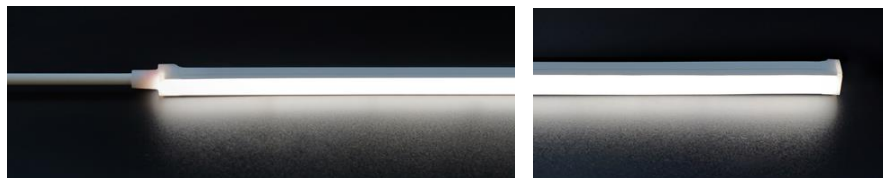

SPECIFICATION (tolerance +/- 10%)	
Applications	Undercabinet & Cove Lighting
Power	2.4 W/ft (8 W/m)
Input	24V DC
Stock CCTs	2700 K 3000 K 4000 K 5000 K
Light output per meter	590 lm 600 lm 690 lm 690 lm
Efficiency	74 lm/W 76 lm/W 86 lm/W 86 lm/W
CRI	90 +
Available Lengths	4 ft, 8 ft, 16 ft
Maximum Connection Length	16 ft
Dimensions	3/8" x 3/8" (10 mm x 10 mm)
Beam Angle	110°
Dimmable	Yes
LED Operation Type	Constant Voltage
IP Grade	IP 67
Approved Location	Wet Location
Operating Temperature	-4°F (-20°C) to +220°F (+105°C)
Cutttable Increment	4" (100 mm)
Minimum Bending Diameter	4 3/4" (120mm) Horizontal 6" (150 mm) Vertical
Projected Life	70% Light Output at 50,000 Hours
Certification	c UL us
Warranty	5 Year Indoor / 3 Year Outdoor

