

ES-FSCOBWW-24-IP67

Sauna COB LED Strip 24V 3W/ft 12 mm CRI90+ IP67

Project: _____

Location: _____

Model # : _____ Qty: _____

Notes: _____

DESCRIPTION

COB LED flexible linear light for high temperature installations
 Rated up to +220°F (+105°C)
 Seamless linear light - no diffused cover needed
 No hotspots and with CRI 90+ for vibrant colors
 Reinforced design for stable performance when bending & twisting
 3 oz copper PCB and real gold wires for superb light maintenance
 6" wires on both ends and 2 end caps included



INSTALLATION INSTRUCTIONS

1. Mount using the silicone clips included



2. Minimum bending radius 2"
3. You may cut it once and use the wires on both ends to power the pieces.
Cutttable Increment 2"
4. Use the included 2 end caps to re-seal the ends with silicone.

DIMENSIONS

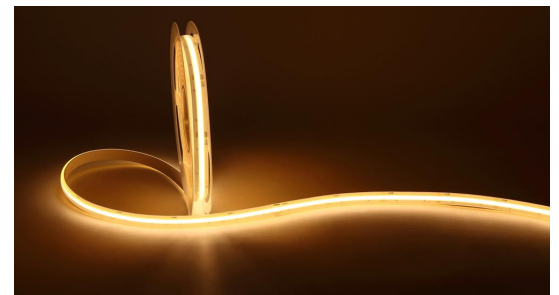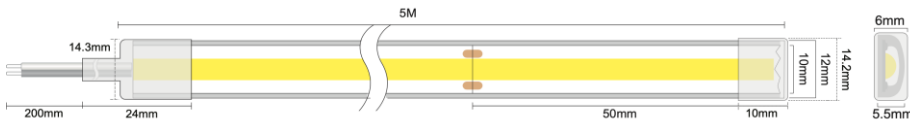

ORDERING GUIDE

example: **ES-FSCOBWW-24-IP67-30K-16FT**

	- CCT (K)	- Length
ES-FSCOBWW-24-IP67	-27K	-16FT
	-30K	
	-40K	
	-50K	

Included in package: _____

2 end caps, 16 transparent silicone mounting clips & 32 screws

SPECIFICATION (tolerance +/- 10%)	
Applications	Saunas, Spas, Steam Showers
Power	3 W/ft (10 W/m)
Input	24V DC
Stock CCTs	2700 K 3000 K 4000 K 5000 K
Light output per meter	840 lm 890 lm 980 lm 980 lm
Efficiency	84 lm/W 89 lm/W 98 lm/W 98 lm/W
CRI	90 +
Available Lengths	16 ft (5m)
Maximum Connection Length	16 ft (5 m)
Width	1/2" (12 mm)
Beam Angle	120°
Dimmable	Yes
LED Operation Type	Constant Voltage
IP Grade	IP 67
Approved Location	Wet Location
Operating Temperature	-4°F (-20°C) to +220°F (+105°C)
Cutttable Increment	2" (50 mm)
Minimum Bending Radius	2" (50 mm)
LEDs density	COB 480 LEDs / meter
Projected Life	70% Light Output at 50,000 Hours
Certification	c UL us
Warranty	5 Year Indoor / 3 Year Outdoor

