



LED-4-S9W-5CCT-FG-SQ

4" Square Floating Gimbal Recessed LED 5CCT 9W



Project: _____

Location: _____

Model: _____ Qty: _____

Notes: _____

DESCRIPTION

4" Square LED Floating Gimbal
Adjustable in any direction and easy to use
Perfect for accent lighting

FEATURES & BENEFITS

Ideal for sloped ceilings, wall washing, highlighting artwork, task or general lighting.

1 1/2" Deep - Fits in limited ceiling spaces

Type IC Rated - No Housing Required



Driver Inside Connection Box - No Junction Box Needed

5 CCT user selectable 2700-3000-3500-4000-5000K

Beam options: **38°** (standard), **24°** & **60°** available as adder

Damp Location & Airtight

DIMENSIONS ID 4" OD 5" Square Depth 1 1/2"
Cut Out 4 1/8" 120V Triac Dimmable Driver Included

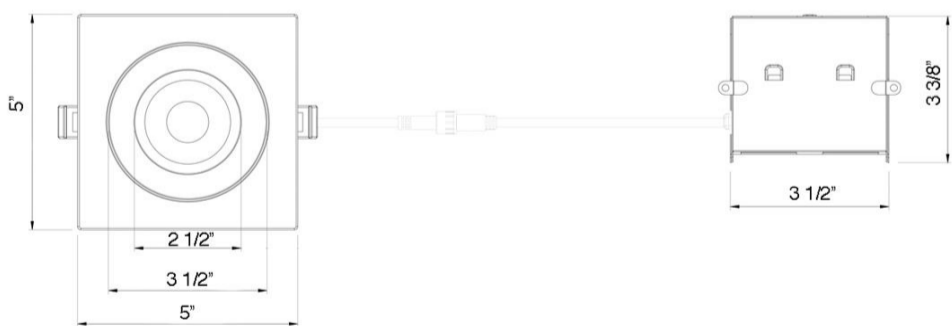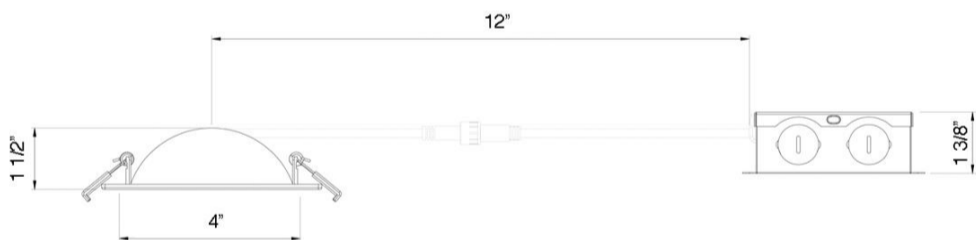

ORDERING GUIDE

	Beam Angle
5CCT White Trim LED-4-S9W-5CCT-FG-SQ-WH	blank for 38° -24D for 24° -60D for 60°







Other trims and light options available by custom order

SPECIFICATION	
Applications	Sloped ceilings, Wall washing, General lighting
Energy Used	9 W
Color Temperature (K)	2700 - 3000 - 3500 - 4000 - 5000
Light Output (lm)	740 - 770 - 820 - 850 - 855
Halogen Equivalent	75 W
Beam Angle	38° (standard), 24° & 60° available as adder
CRI	90+
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Junction Box Volume	9.69 cu in / max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	3 Year



ACCESSORIES

Sold Separately

-  [13" Mounting Plate Flat model # MP4-2](#)
-  [13" Mounting Plate Flanged model # MP4](#)
-  [26" Flat Rough-In Plates model # RIP4](#)
-  [Flanged Plate with Hanger Bars model # FRP4](#)
-  [Jumper Cable 10 ft. Model # JC-5CCT-10](#)
-  Adder for 24° or 60° Light Beam